



LINGJACK

林傑

PRESSURE REGULATING VALVE

2 1/2" BSPT(M) BIB NOSE PRESSURE REGULATING VALVE

MODEL : DH6I

Specification :

- Inlet : 2 1/2" BSPT(M) Thread
- Outlet : 2 1/2" BS336 Female Instantaneous
- Design Pressure : 20 bar
- Seat Test Pressure : 22 bar
- Body Test Pressure : 30 bar
- Inlet Pressure : 5 bar to 20 bar
- Working Temperature : 0°C - 38°C
- Outlet Running Pressure : 2 bar to 10 bar (varies with different type of spring)
- Flow Rate : 9 l/sec (540 lpm) at 4 bar \pm 3%
- Finishing : Red
- Body Material : Gunmetal LG2
- Hand Wheel : Cast Iron
- Accessories : Plastic Blank Cap and SS Chain
- Gross Weight : Approximate 10.5 kg




Features :

- Maintenance Free
- Minimum Friction Loss, High Flow Rate
- Excellence Finish

Standards : Manufactured in accordance with BS5041-1 : 1987

Approvals : LPCB (UK) , SETSCO (SG)

Origin : Made in Singapore

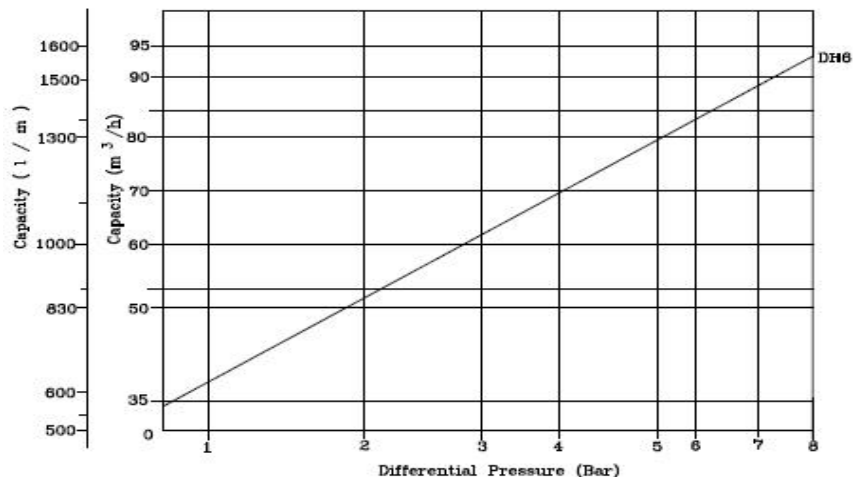

GOOD QUALITY GREAT SERVICES

www.lingjack.com

Specification subjects to change without prior notice (0416 REV05)