


Model Performance Specifications

FP1



FEATURES:

- One lip seal
- 1" NPT
- All bronze
- 304 stainless shaft
- Spur gear
- With or without relief valve
- RPM up to 2000
- Dry run capable

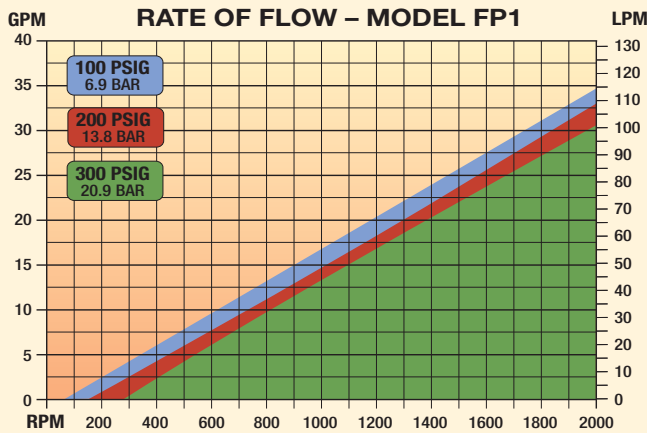


FP2



FEATURES:

- One lip seal
- 1 1/2" NPT
- All bronze
- 304 stainless shaft
- Spur gear
- With or without relief valve
- RPM up to 2000
- Dry run capable

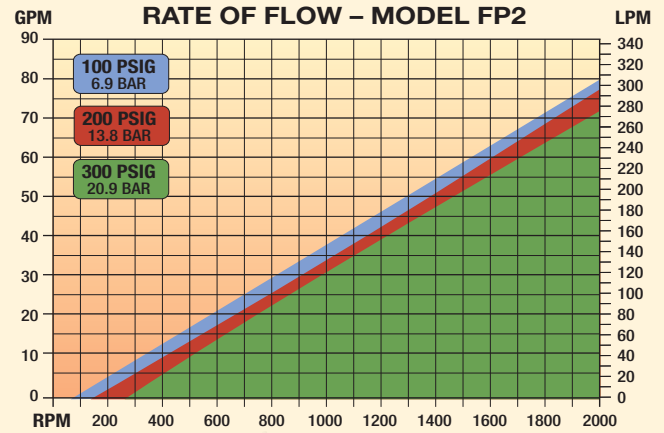


FP3




FEATURES:

- One lip seal
- 2" 150# FLG
- All bronze
- 304 stainless shaft
- Herringbone gear
- With or without relief valve
- RPM up to 2000
- Dry run capable

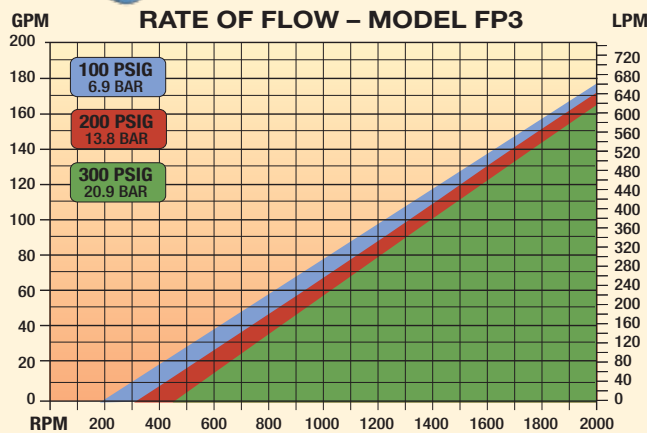


FP4

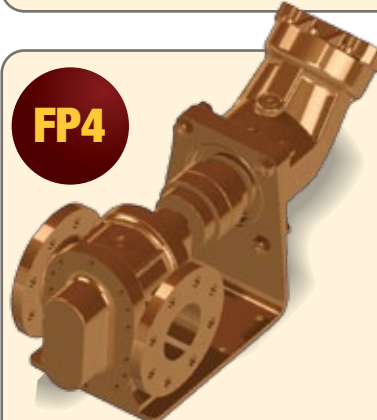

FEATURES:

- One lip seal
- 4" 150# FLG
- All bronze
- 304 stainless shaft
- Herringbone gear
- With or without relief valve
- RPM up to 2000
- Dry run capable

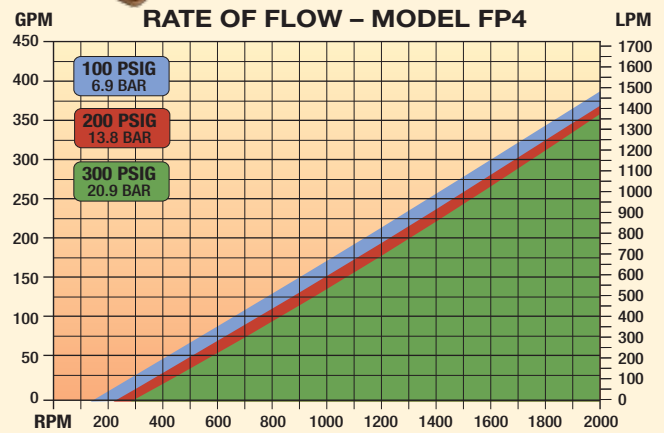

Contact us TODAY!

Call Tom for expert personal attention to your unique fire hazard protection needs at (360) 901-9828 or call Treasha at (360) 901-4077. Feel free to email us at info@firelionglobal.com. Also, be sure to visit our website as well as connect with us on Facebook.



**Fire
Lion
GLOBAL**

3009 NE 145th Street
Vancouver, WA 98686 USA
Phone (360) 901-9828
Fax (360) 571-3517
info@firelionglobal.com

www.firelionglobal.com