


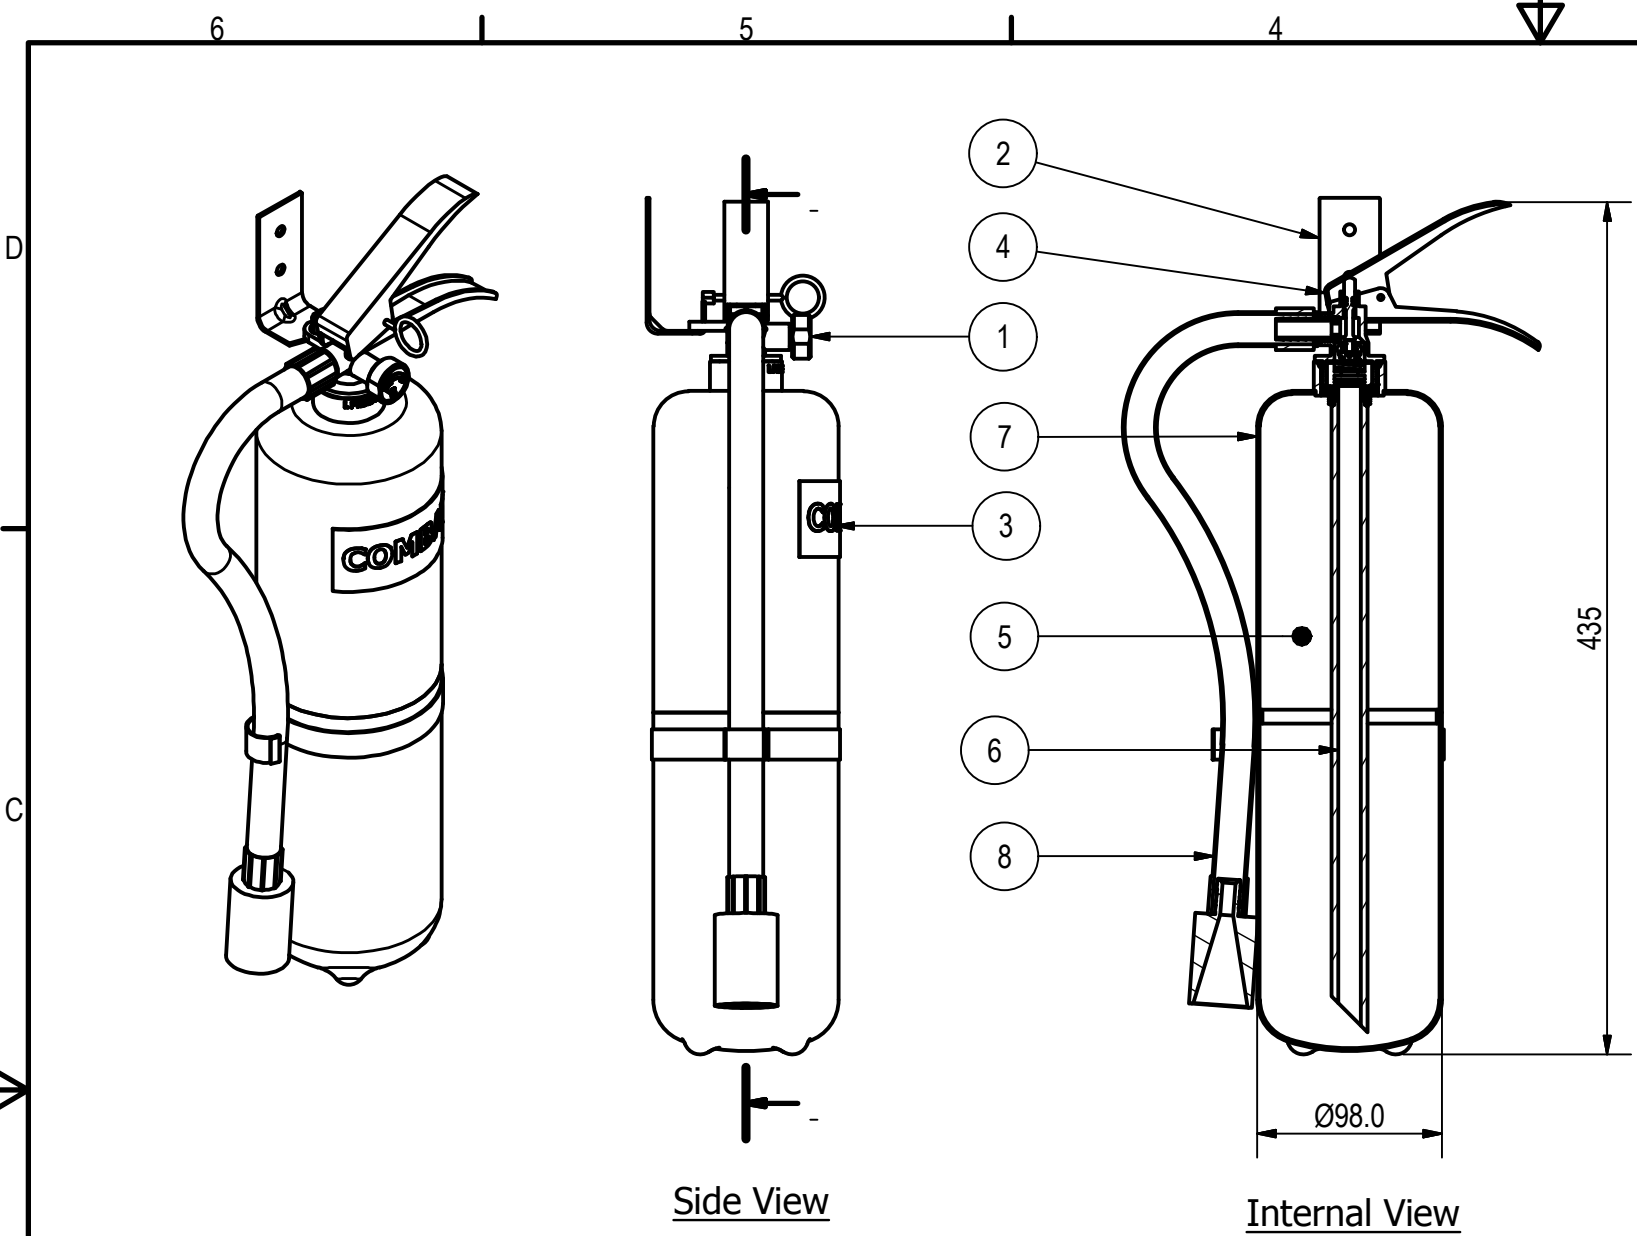

Parts List				
Item	Description	Specification	Com No.	Qty.
1	Pressure Gauge	Working Temperture Range : -20 deg C To 60 deg C	03034500	1
2	Hook Bracket HB-28	Material : 1.5mm Mild Steel Finishing : Chrome Plated	03021500	1
3	Artwork	Silkscreen	NA	1
4	Valve Assembly	Model 06E20	03001000	1
5	Medium	Halotron BrX	03009802	2 Kg
6	Syphon Tube	Material : Aluminium	03039101	1
7	Empty Cylinder	Material : JISG3141 Cold Roll Sheet, 1.5mm Thick Finishing : Red Epoxy Powder Coated	03066300	1
8	Hose And Horn	Material (Hose) : Black Braided PVC Material (Nozzle) : Aluminium	03003105	1

Technical Specification	
Description	Specification
Extinguisher Medium	Halotron BrX
Working Temperature	-20 deg C To 60 deg C
Working Pressure	7 Bar
Test Pressure, PT	27 Bar @ 30 Sec
Maximum Allowable Pressure, PS	18 Bar
Fire Rating	5A/34B
Gross Weight	3.9 Kg

Ordering Matrix			
Com No.	Brand	Approval	Remarks
20800212 00000	COMBAT	TUV	SS EN3
20800212 00001	COMBAT	TUV	EN3
20800212 00002	LINGJACK	TUV	EN3

LINGJACK ENGINEERING WORKS PTE LTD
NO.1 WOODLANDS TERRACE #03-01
LINGJACK INDUSTRIAL BUILDING
SINGAPORE 738471
TEL:(65)6759 4163 FAX:(65)6758 7513
E-MAIL:COMBAT@LINGJACK.COM
WEBSITE:WWW.COMBAT.COM.SG

Customer : -

Title : Halotron BrX Portable Fire Ext, Stored Pressure 2KG (C-2HBSE)

Drawing No. : 20800212

Com. No. :

This drawing contains proprietary information and should not be reproduced or use in any way without written permission from Lingjack Engineering Works Pte Ltd.

Scale : NTS

Sheet : 1/1

3rd Angle Projection :

16.8.22

Approved Drawing.

ZhuYik

Lucas

00

A

Date

Description

Drawn

Approved

GA Rev

Pro Rev