


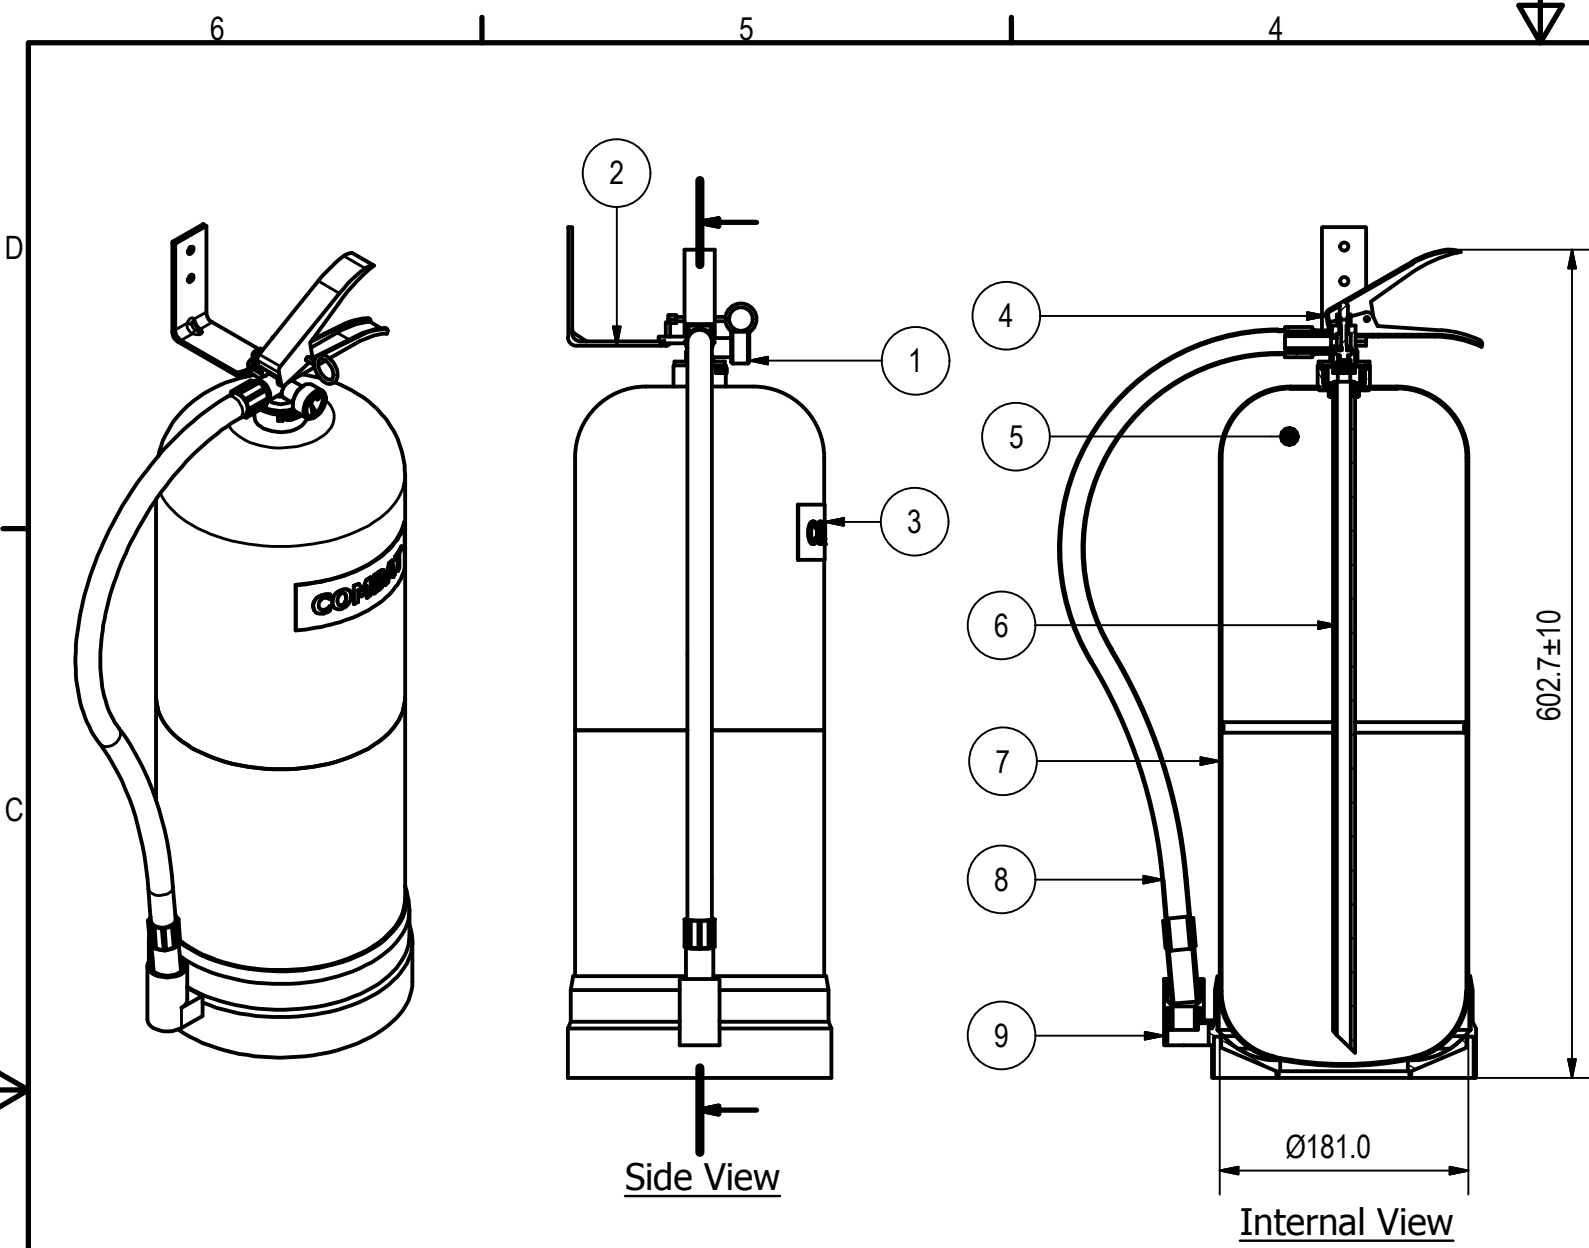


Parts List				
Item	Description	Specification	Com No.	Qty.
1	Pressure Gauge	Working Temperture Range : -20 deg C To 60 deg C	03000200	1
2	Hook Bracket	Material : Mild Steel Finishing : Chrome Plated	03021700	1
3	Silkscreen Label	NA	NA	1
4	Valve Assembly	Refer To Technical Drawing 06E20	03013103	1
5	Medium	Purple K Powder	03025000	9Kg
6	Syphon Tube	Material : UPVC Plastic	03032500	1
7	Empty Cylinder	Material : JISG3141 Cold Roll Sheet Finishing : Red Epoxy Powder Coated	03098100	1
8	Hose And Horn	Material (Hose) : Black Braided PVC Material (Nozzle) : Black PP Plastic	03002601	1
9	Plastic Skirt Dia.181	Material : UPVC Plastic	03065800	1

Technical Specification	
Description	Specification
Working Temperature	-20 deg C To 60 deg C
Working Pressure	14 Bar
Test Pressure, PT	27 Bar @ 30 Sec
Maximum Allowable Pressure, PS	18 Bar
Fire Rating	233B/C
Gross Weight	13.2kg

Ordering Matrix		
Com No.	Specification	Approval
20804502	BS EN3-7	LPCB
2080450200001	SS EN3-7	SETSCO

A

 LINGJACK ENGINEERING WORKS PTE LTD NO.1 WOODLANDS TERRACE #03-01 LINGJACK INDUSTRIAL BUILDING SINGAPORE 738471 TEL:(65)6759 4163 FAX:(65)6758 7513 E-MAIL:COMBAT@LINGJACK.COM WEBSITE:WWW.COMBAT.COM.SG	Customer :-		Project :-											
	Title : Purple K Portable Fire Ext, Stored Pressure 9KG (C-9PKSE)													
	Drawing No. : 20804502		Com. No. :											
			This drawing contains proprietary information and should not be reproduced or use in any way without written permission from Lingjack Engineering Works Pte Ltd.		Scale : NTS	Sheet : 1/1	19.10.11	Production Drawing.	Ken	Lucas	00	A		
					3rd Angle Projection : 	Date	Description	Drawn	Approved	GA Rev	Pro Rev			