



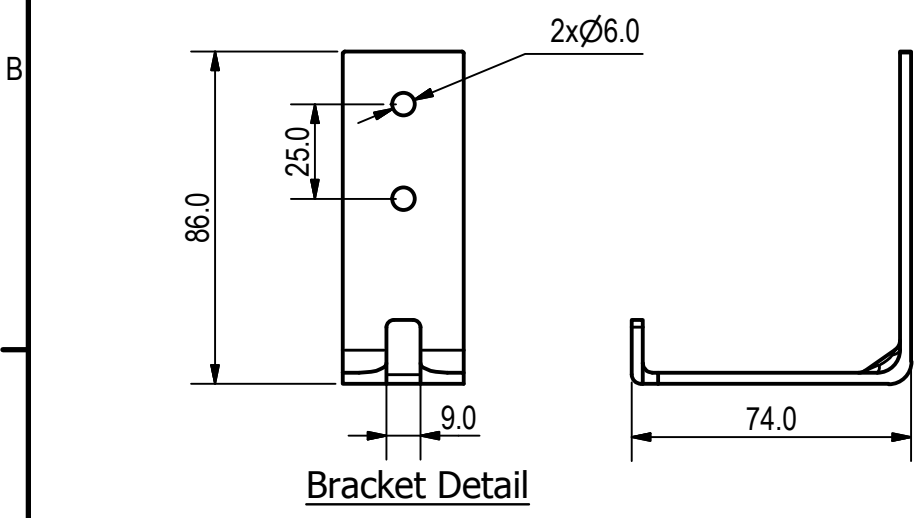

Parts List				
Item	Description	Specification	Com No.	Qty.
1	Pressure Gauge	Working Temperture Range : 5 deg C To 60 deg C	03000300	1
2	Hook Bracket	Material : Mild Steel, Min 1.5mm Thick Finishing : Chrome Plated	03021700	1
3	Silkscreen Label	NA	NA	1
4	Valve Assembly	Refer To Technical Drawing 06E20	03013103	1
5	Medium	1% Foam Additive	03011201	1
6	Syphon Tube	Material : UPVC Plastic	03032400	1
7	Empty Cylinder	Material : JISG3141 Cold Roll Sheet, 1.5mm Thick Finishing : Red Epoxy Powder Coated	03098000	1
8	Hose And Foam Nozzle	Material (Hose) : Black Braided PVC Material (Nozzle) : Black PP Plastic	03006803	1
9	Water Filter	Material : HDPE Plastic	03033100	1
10	Plastic Skirt Dia.181	Material : UPVC Plastic	03065800	1
11	Body Belt	Material : UPVC Plastic	03002800	1

Technical Specification	
Description	Specification
Working Temperature	5 Deg C To 60 Deg C
Working Pressure	14 Bar
Maximum Allowable Pressure, PS	18 Bar
Test Pressure	27 Bar @ 30sec
Fire Rating	8A/113B
Gross Weight (Approx.)	10 KG

Ordering Matrix		
Com No.	Specification	Approval
20802514	BS EN3-7	LPCB

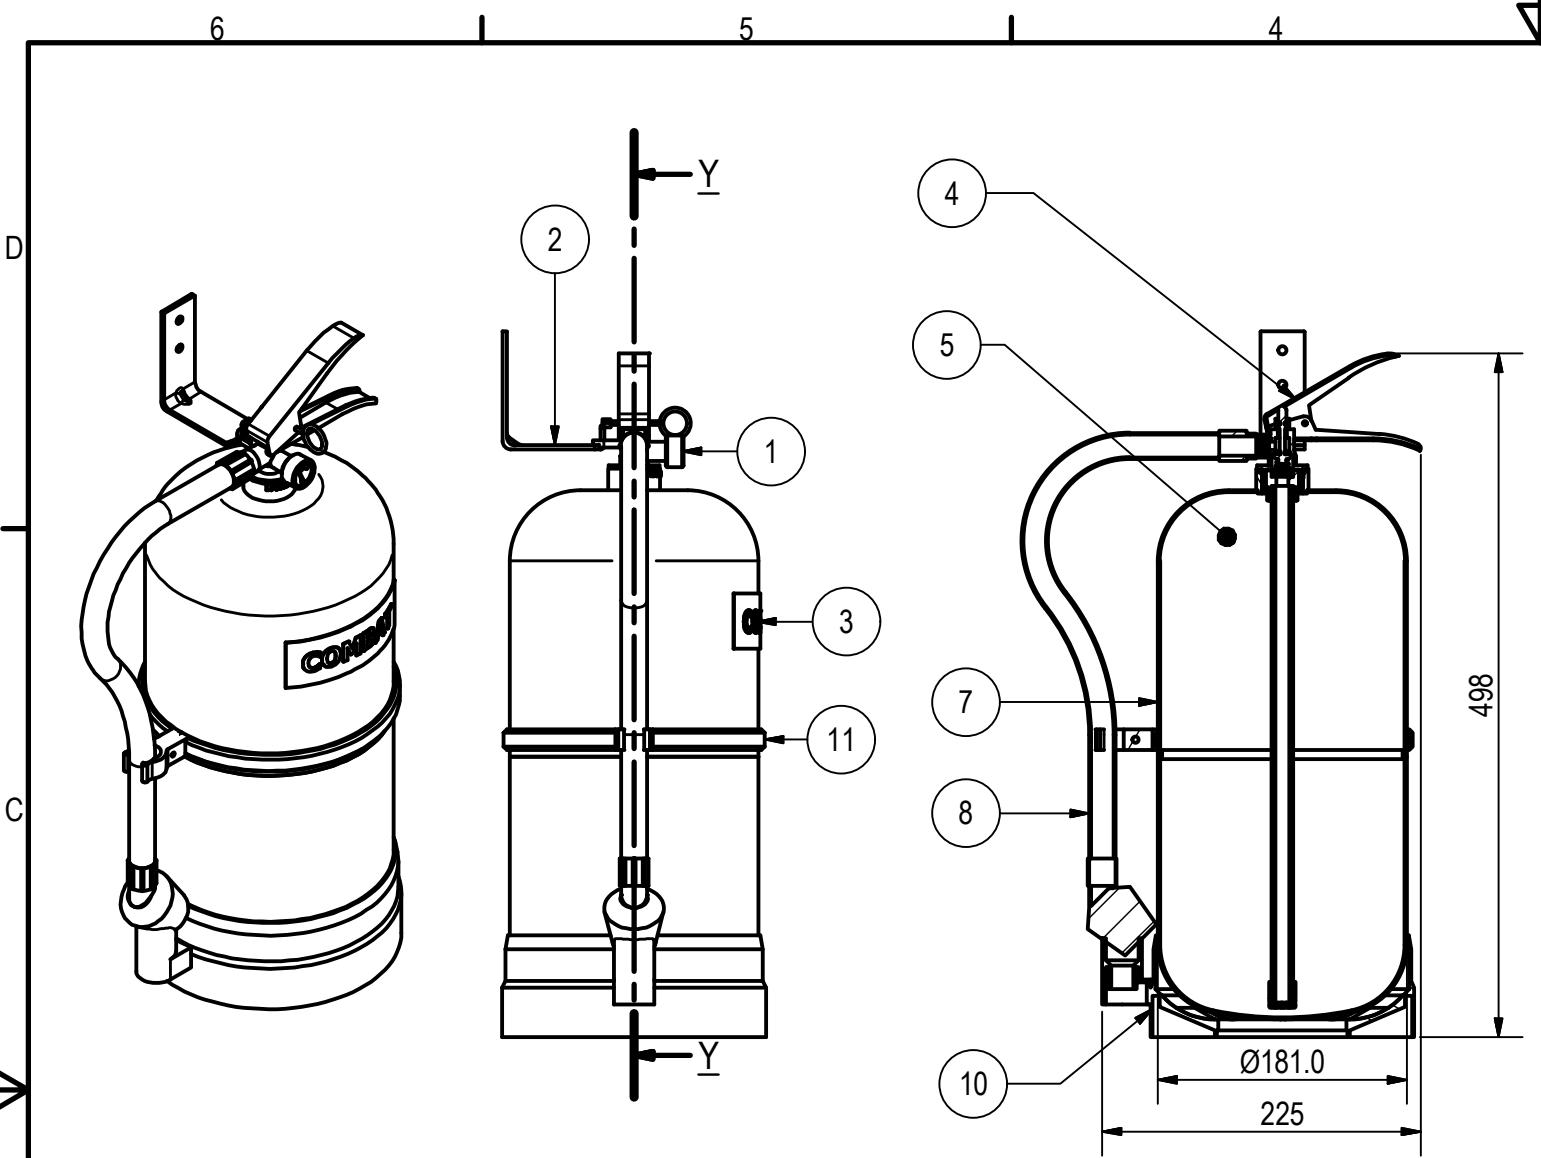

LINGJACK ENGINEERING WORKS PTE LTD
NO.1 WOODLANDS TERRACE #03-01
LINGJACK INDUSTRIAL BUILDING
SINGAPORE 738471
TEL:(65)6759 4163 FAX:(65)6758 7513
E-MAIL:COMBAT@LINGJACK.COM
WEBSITE:WWW.COMBAT.COM.SG

Customer : -

Title : Foam Portable Fire Ext, Stored Pressure 6L (C-6FSE)

Drawing No. : 20802500

Com. No. : -

This drawing contains proprietary information and should not be reproduced or use in any way without written permission from Lingjack Engineering Works Pte Ltd.

Scale : NTS
3rd Angle Projection : 

Sheet : 1/1

10.02.09

Approved Drawing.

TanCP

Lucas

00

A

Date

Description

Drawn

Approved

GA Rev

Pro Rev