


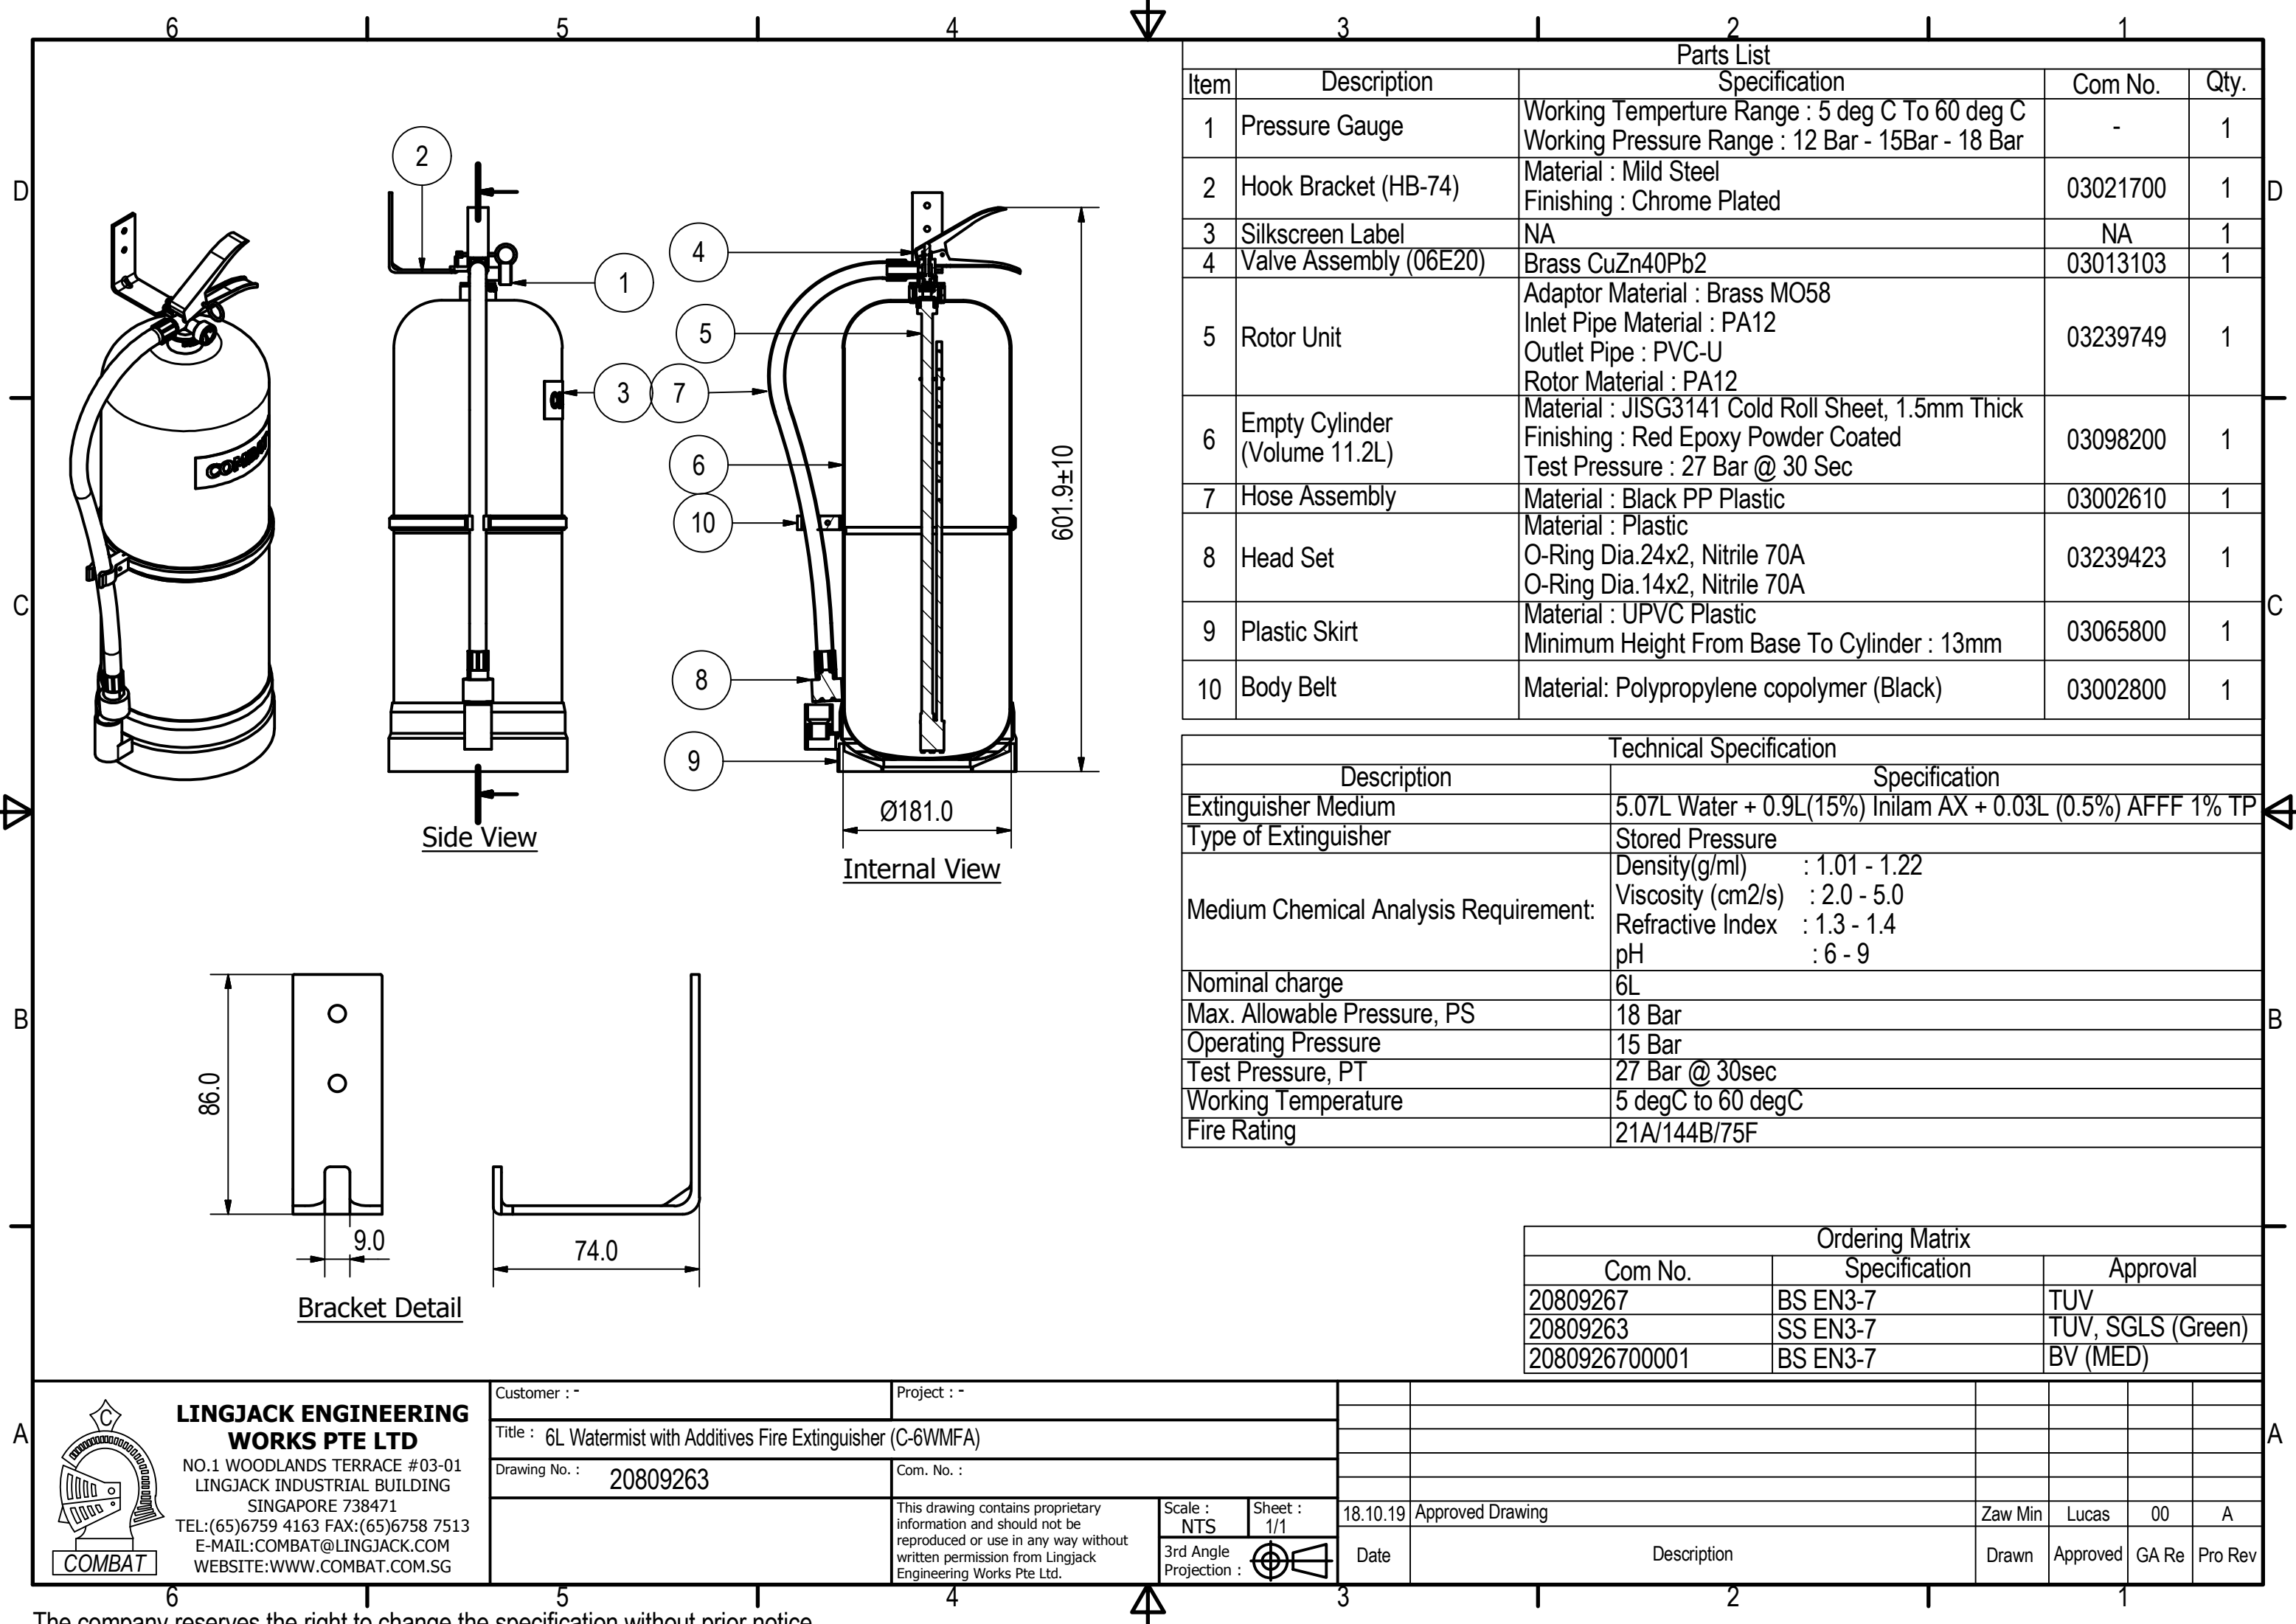

Parts List				
Item	Description	Specification	Com No.	Qty.
1	Pressure Gauge	Working Temperture Range : 5 deg C To 60 deg C Working Pressure Range : 12 Bar - 15Bar - 18 Bar	-	1
2	Hook Bracket (HB-74)	Material : Mild Steel Finishing : Chrome Plated	03021700	1
3	Silkscreen Label	NA	NA	1
4	Valve Assembly (06E20)	Brass CuZn40Pb2	03013103	1
5	Rotor Unit	Adaptor Material : Brass MO58 Inlet Pipe Material : PA12 Outlet Pipe : PVC-U Rotor Material : PA12	03239749	1
6	Empty Cylinder (Volume 11.2L)	Material : JISG3141 Cold Roll Sheet, 1.5mm Thick Finishing : Red Epoxy Powder Coated Test Pressure : 27 Bar @ 30 Sec	03098200	1
7	Hose Assembly	Material : Black PP Plastic	03002610	1
8	Head Set	Material : Plastic O-Ring Dia.24x2, Nitrile 70A O-Ring Dia.14x2, Nitrile 70A	03239423	1
9	Plastic Skirt	Material : UPVC Plastic Minimum Height From Base To Cylinder : 13mm	03065800	1
10	Body Belt	Material: Polypropylene copolymer (Black)	03002800	1

Technical Specification	
Description	Specification
Extinguisher Medium	5.07L Water + 0.9L(15%) Inilam AX + 0.03L (0.5%) AFFF 1% TP
Type of Extinguisher	Stored Pressure
Medium Chemical Analysis Requirement:	Density(g/ml) : 1.01 - 1.22
	Viscosity (cm2/s) : 2.0 - 5.0
	Refractive Index : 1.3 - 1.4
	pH : 6 - 9
Nominal charge	6L
Max. Allowable Pressure, PS	18 Bar
Operating Pressure	15 Bar
Test Pressure, PT	27 Bar @ 30sec
Working Temperature	5 degC to 60 degC
Fire Rating	21A/144B/75F

Ordering Matrix		
Com No.	Specification	Approval
20809267	BS EN3-7	TUV
20809263	SS EN3-7	TUV, SGLS (Green)
2080926700001	BS EN3-7	BV (MED)

</