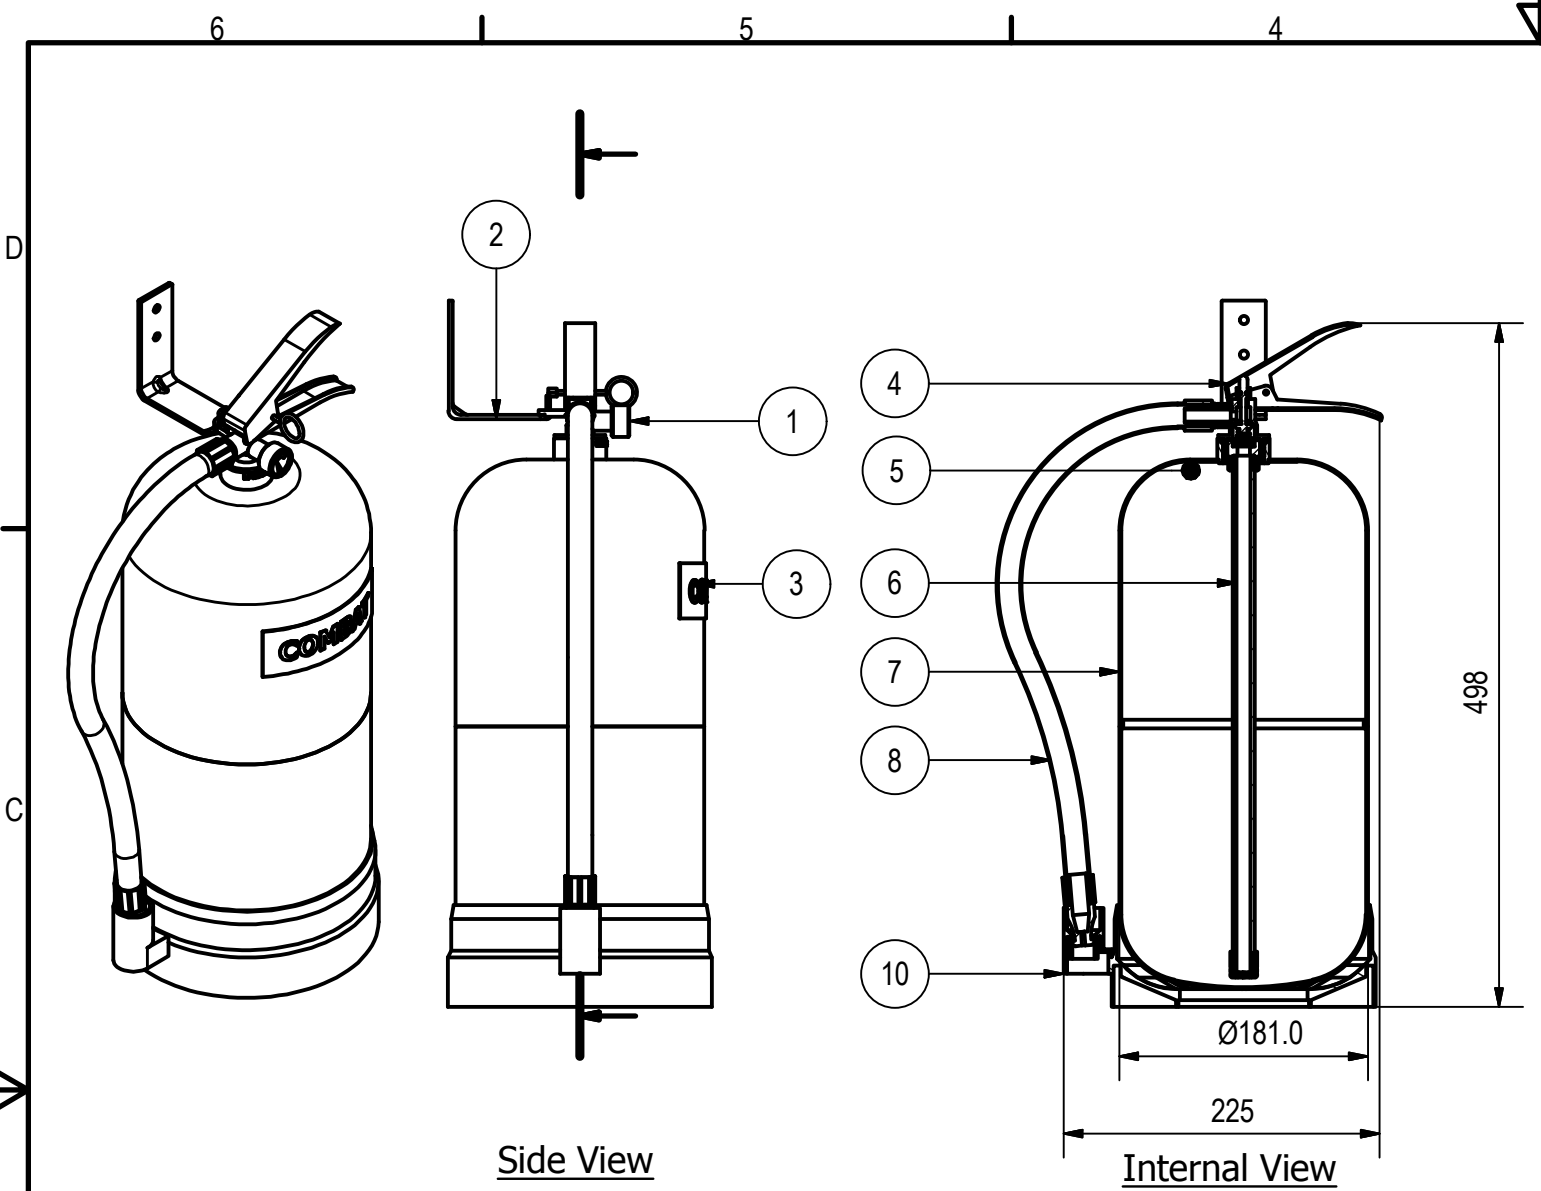






Parts List				
Item	Description	Specification	Com No.	Qty.
1	Pressure Gauge	Working Temperture Range : 5 deg C To 60 deg C	03000300	1
2	Hook Bracket	Material : Mild Steel with min. 1.5mm thick Finishing : Chrome Plated	03021700	1
3	Silkscreen Label	NA	NA	1
4	Valve Assembly	Refer To Technical Drawing 06E20	03013103	1
5	Medium	Water	-	1
6	Syphon Tube	Materials : UPVC Plastic	03152500	1
7	Empty Cylinder	Cylinder Materialsl : 1.5mm JISG3141 Cold Roll Sheet Finishing : Red Epoxy Powder Coated	03098000	1
8	Hose And Horn	Material (Hose) : Black Braided PVC Material (Nozzle) : Red PP Plastic	03195400	1
9	Water Filter	Material : HDPE Plastic	03033100	1
10	Plastic Skirt Dia.181	Materials : UPVC Plastic	03065800	1

Technical Specification	
Description	Specification
Working Temperature	5 Deg C To 60 Deg C
Working Pressure	14 Bar
Maximum Allowable Pressure, PS	18 Bar
Test Pressure	27 Bar @ 30sec
Fire Rating	8A
Gross Weight	9.76kg

Ordering Matrix		
Com No.	Specification	Approval
20802502	BS EN3-7	LPCB

A

 LINGJACK ENGINEERING WORKS PTE LTD NO.1 WOODLANDS TERRACE #03-01 LINGJACK INDUSTRIAL BUILDING SINGAPORE 738471 TEL:(65)6759 4163 FAX:(65)6758 7513 E-MAIL:COMBAT@LINGJACK.COM WEBSITE:WWW.COMBAT.COM.SG	Customer :-		Project :-							
	Title : Water Portable Fire Ext, Stored Pressure 6L (C-6WSE)									
	Drawing No. : 20802502		Com. No. :							
		This drawing contains proprietary information and should not be reproduced or use in any way without written permission from Lingjack Engineering Works Pte Ltd.	Scale : NTS	Sheet : 1/1	07.12.11	Approved Drawing.	Ken	Lucas	00	A
		3rd Angle Projection : 		Date	Description	Drawn	Approved	GA Rev	Pro Rev	