




Parts List				
Item	Description	Specification	Com No.	Qty.
1	Pressure Gauge	Working Temperture Range : 5 deg C To 60 deg C	03000300	1
2	Hook Bracket	Material : 1.5mm Mild Steel Finishing : Chrome Plated	03021700	1
3	Artwork	Silkscreen	NA	1
4	Valve Assembly	Model 06E20	03013100	1
5	Medium	15% Water Additives	03011202	1
6	Medium	1% Foam Additive	03011201	1
7	Syphon Tube	Material : UPVC Plastic	03032900	1
8	Empty Cylinder	Material : 1.5mm JISG3141 Cold Roll Sheet Finishing : Red Epoxy Powder Coated	03098200	1
9	Hose And Foam Nozzle	Material (Hose) : Black Braided PVC Material (Nozzle) : Black PP Plastic	03006801	1
10	Water Filter	Material : HDPE Plastic	03033100	1
11	Plastic Skirt	Material : UPVC Plastic	03065800	1
12	Body Belt	Material : UPVC Plastic	03002800	1

Technical Specification	
Description	Specification
Working Temperature	5 deg To 60 deg C
Working Pressure	14 Bar
Maximum Allowable Pressure, PS	18 Bar
Test Pressure	27 Bar @ 30sec
Fire Rating	34A/233B
Gross Weight	13.3 Kg

Ordering Matrix		
Com No.	Specification	Approval
20801736	BS EN3-7	LPCB
20801702	SS EN3-7	SETSCO

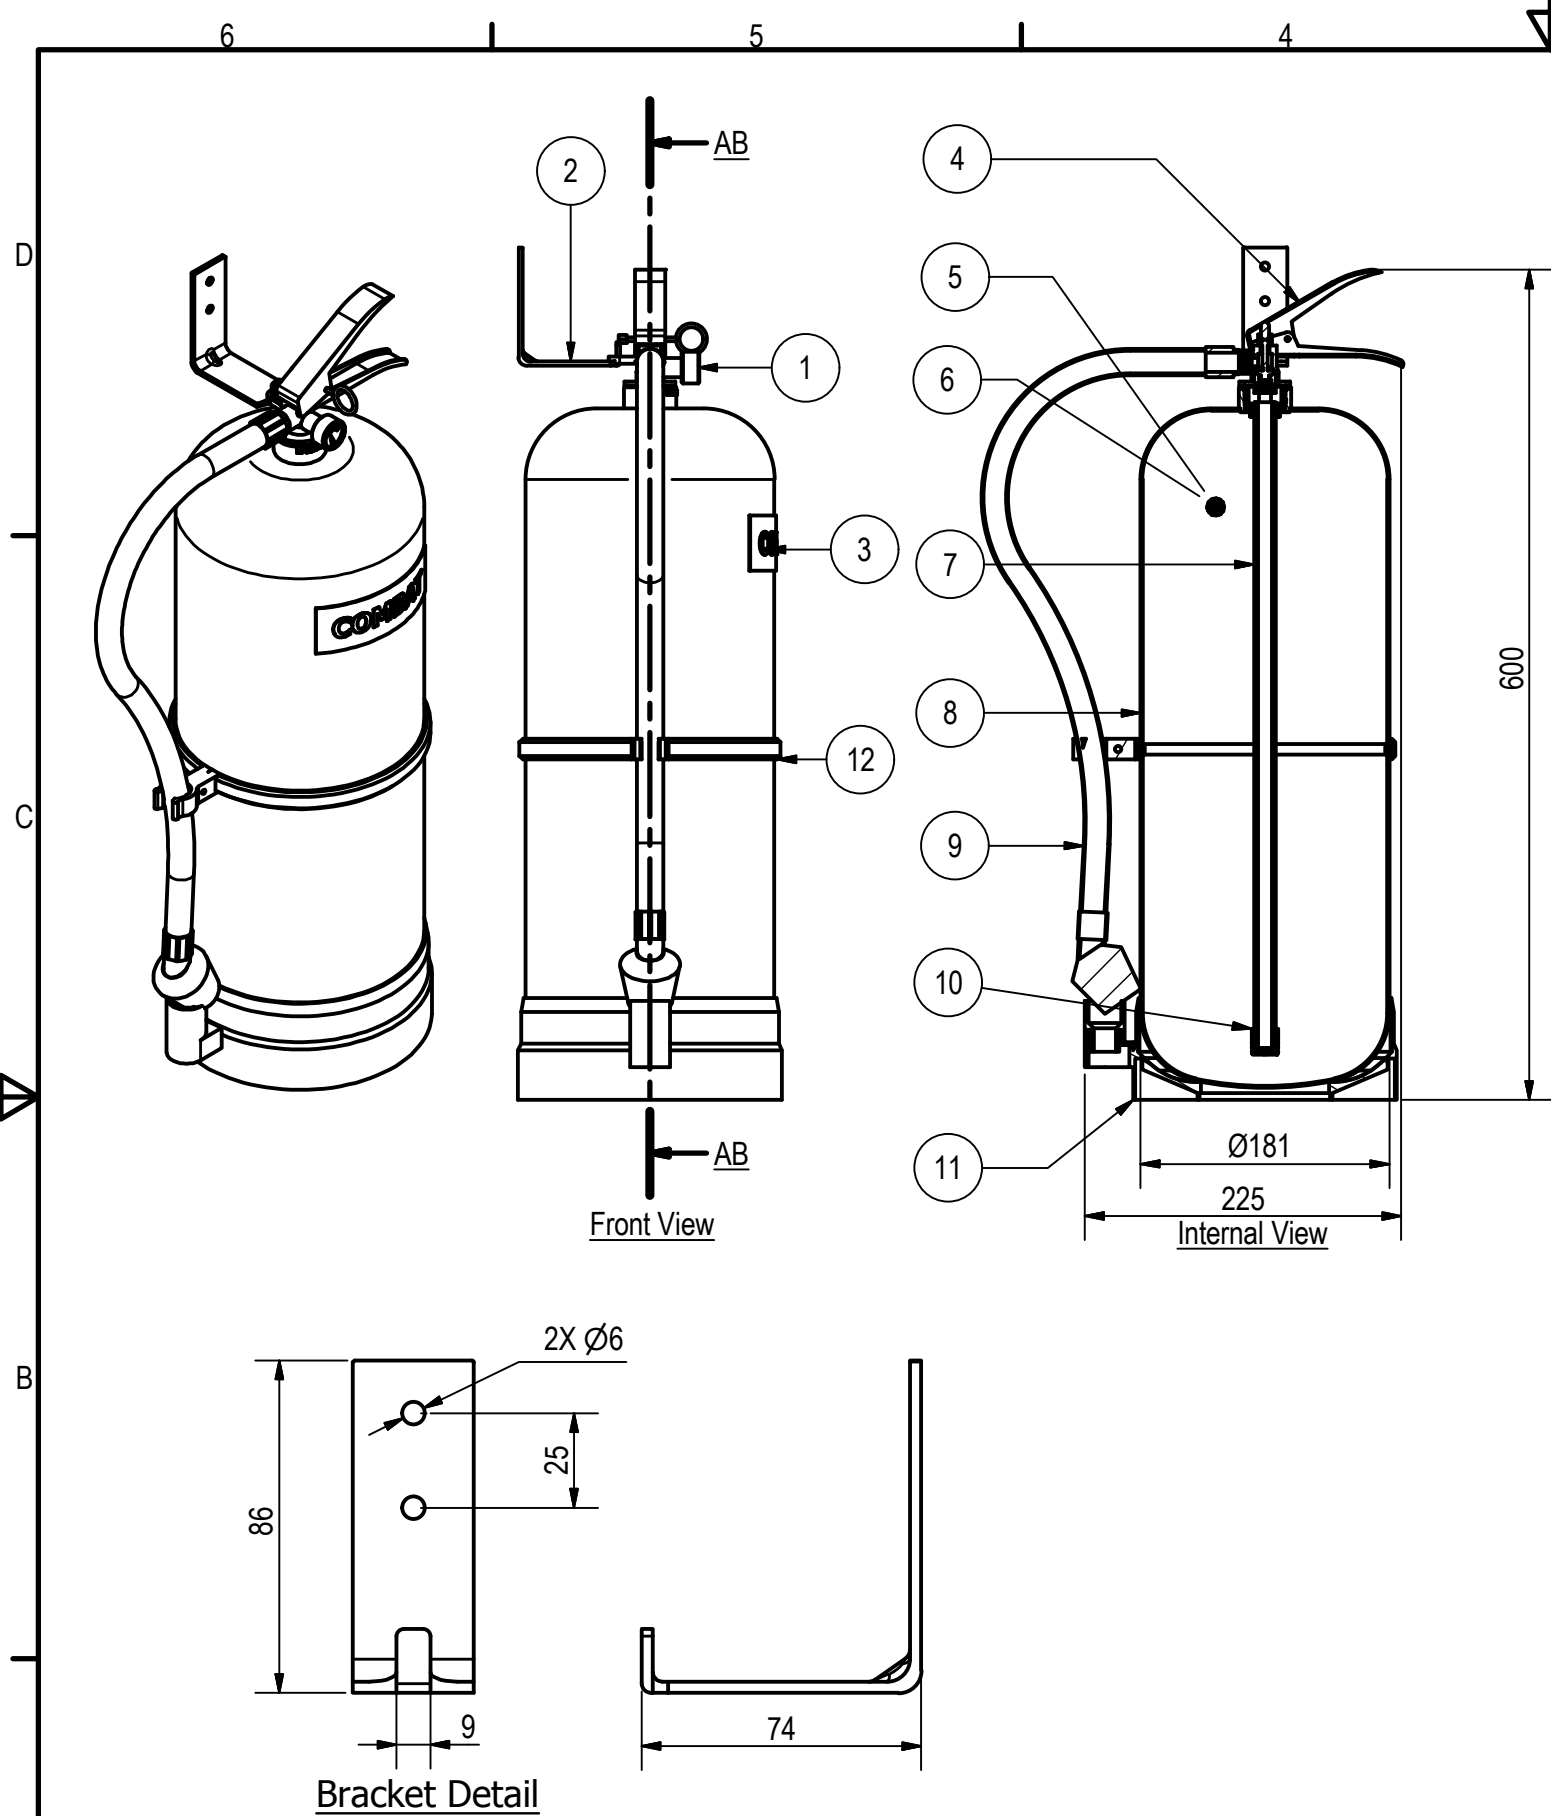

**LINGJACK ENGINEERING
WORKS PTE LTD**

NO.1 WOODLANDS TERRACE #03-01
LINGJACK INDUSTRIAL BUILDING
SINGAPORE 738471
TEL:(65)6759 4163 FAX:(65)6758 7513
E-MAIL:COMBAT@LINGJACK.COM
WEBSITE:WWW.COMBAT.COM.SG

Customer : -

Title : Foam Portable Fire Ext, Stored Pressure 9L (C-9FSE)

Drawing No. : 20801736

Com. No. :

This drawing contains proprietary information and should not be reproduced or use in any way without written permission from Lingjack Engineering Works Pte Ltd.

Scale : NTS

Sheet : 1/1

3rd Angle Projection : 

10.02.09

Approved Drawing.

Date

Description

TanCP

Lucas

00

A

Drawn

Approved

GA Rev

Pro Rev