


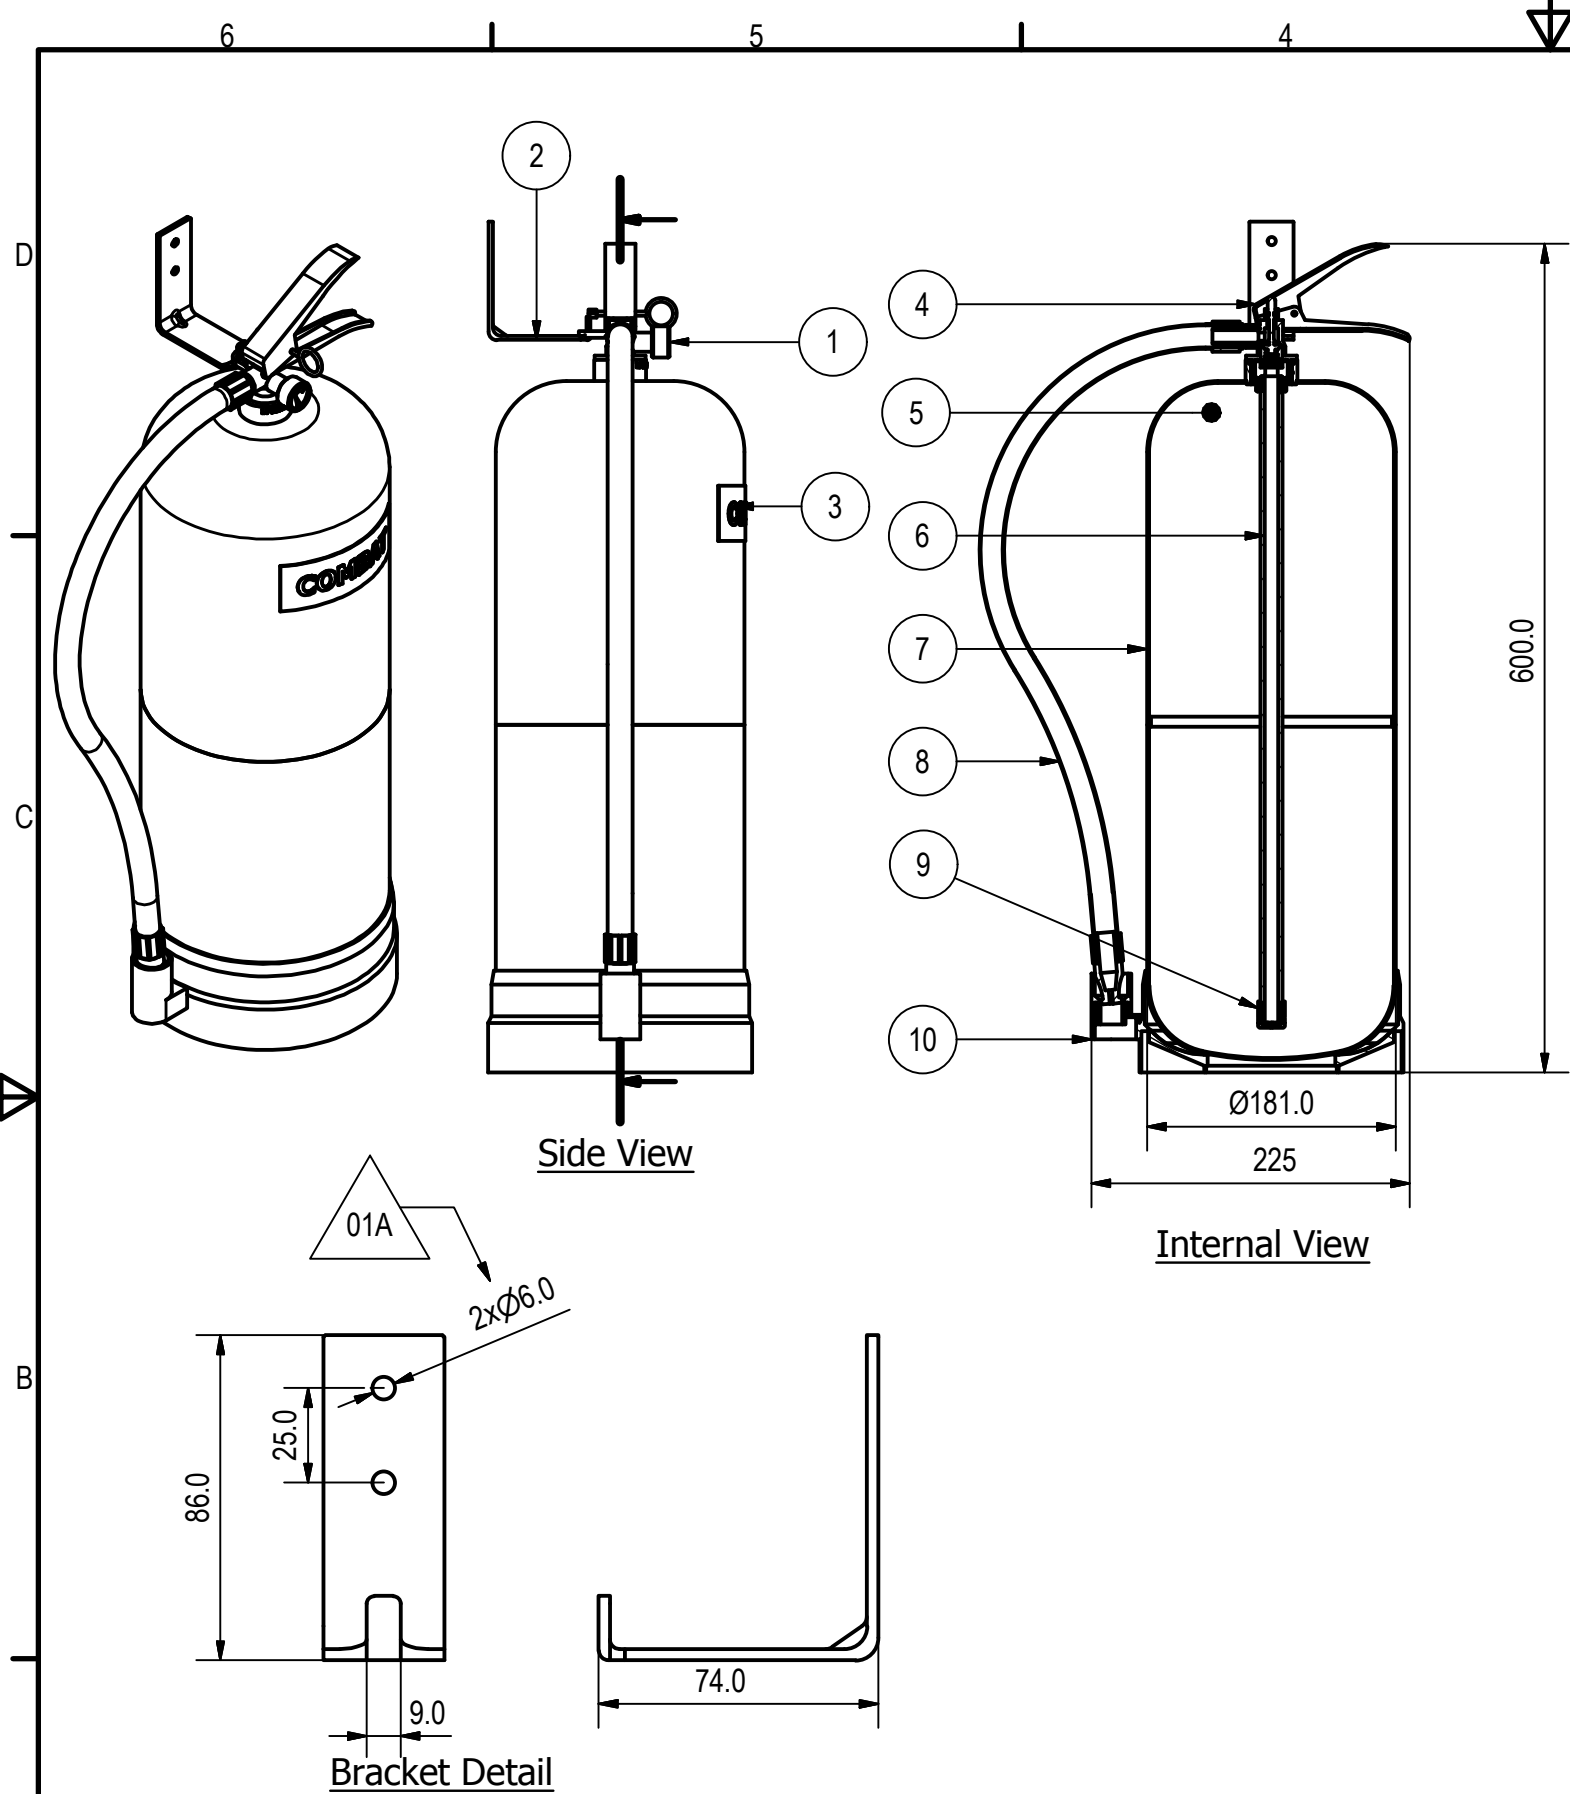

| Parts List |                       |                                                                                                |          |      |
|------------|-----------------------|------------------------------------------------------------------------------------------------|----------|------|
| Item       | Description           | Specification                                                                                  | Com No.  | Qty. |
| 1          | Pressure Gauge        | Working Temperture Range :<br>5 deg C To 60 deg C                                              | 03000300 | 1    |
| 2          | Hook Bracket          | Material : Mild Steel with min. 1.5mm thick<br>Finishing : Chrome Plated                       | 03021700 | 1    |
| 3          | Silkscreen Label      | NA                                                                                             | NA       | 1    |
| 4          | Valve Assembly        | Refer To Technical Drawing : 06E20                                                             | 03013103 | 1    |
| 5          | Medium                | Water                                                                                          | -        | 1    |
| 6          | Syphon Tube           | Materials : UPVC Plastic                                                                       | 03032900 | 1    |
| 7          | Empty Cylinder        | Cylinder Materialsl : 1.5mm JISG3141 Cold Roll<br>Sheet<br>Finishing : Red Epoxy Powder Coated | 03098200 | 1    |
| 8          | Hose And Horn         | Material (Hose) : Black Braided PVC<br>Material (Nozzle) : Red PP Plastic                      | 03002901 | 1    |
| 9          | Water Filter          | Material : HDPE Plastic                                                                        | 03033100 | 1    |
| 10         | Plastic Skirt Dia.181 | Materials : UPVC Plastic                                                                       | 03065800 | 1    |

| Technical Specification        |                     |
|--------------------------------|---------------------|
| Description                    | Specification       |
| Working Temperature            | 5 Deg C To 60 Deg C |
| Working Pressure               | 14 Bar              |
| Maximum Allowable Pressure, PS | 18 Bar              |
| Test Pressure                  | 27 Bar @ 30sec      |
| Fire Rating                    | 13A                 |
| Gross Weight                   | 13.43kg             |

| Ordering Matrix |               |          |
|-----------------|---------------|----------|
| Com No.         | Specification | Approval |
| 20801706        | BS EN3-7      | LPCB     |
|                 |               |          |
|                 |               |          |

<