


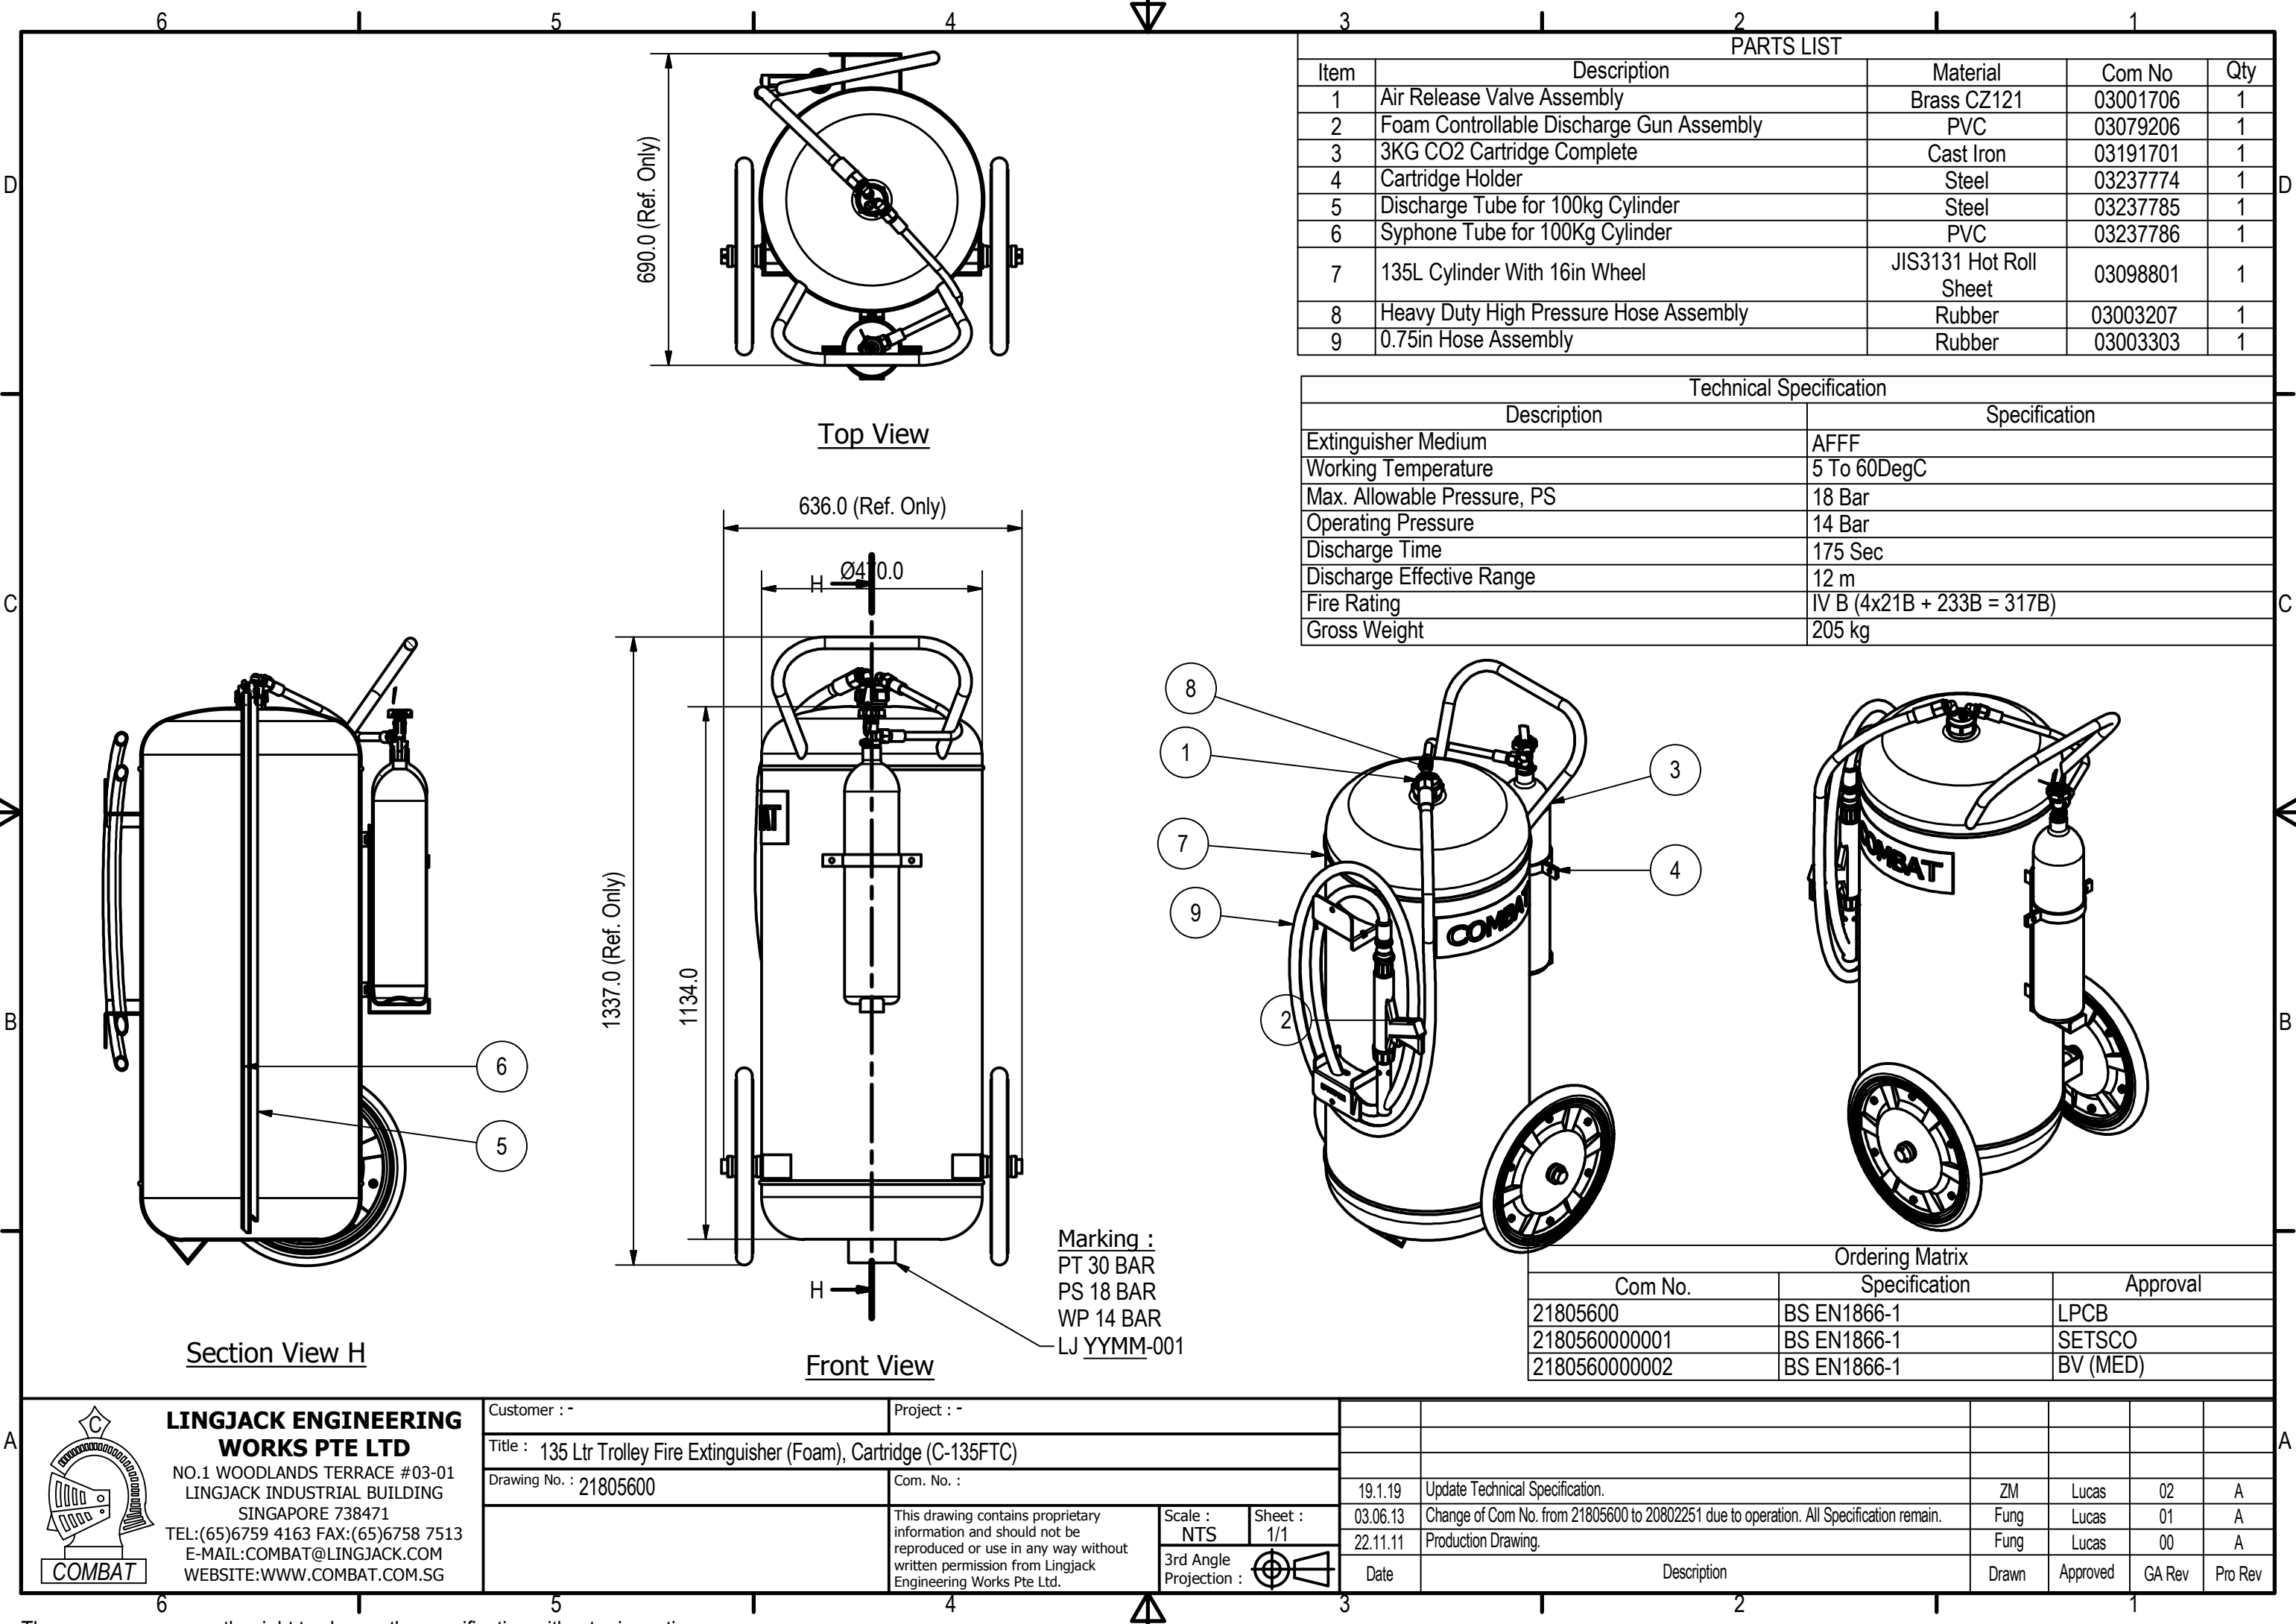

PARTS LIST				
Item	Description	Material	Com No	Qty
1	Air Release Valve Assembly	Brass CZ121	03001706	1
2	Foam Controllable Discharge Gun Assembly	PVC	03079206	1
3	3KG CO2 Cartridge Complete	Cast Iron	03191701	1
4	Cartridge Holder	Steel	03237774	1
5	Discharge Tube for 100kg Cylinder	Steel	03237785	1
6	Syphone Tube for 100Kg Cylinder	PVC	03237786	1
7	135L Cylinder With 16in Wheel	JIS3131 Hot Roll Sheet	03098801	1
8	Heavy Duty High Pressure Hose Assembly	Rubber	03003207	1
9	0.75in Hose Assembly	Rubber	03003303	1

Technical Specification	
Description	Specification
Extinguisher Medium	AFFF
Working Temperature	5 To 60DegC
Max. Allowable Pressure, PS	18 Bar
Operating Pressure	14 Bar
Discharge Time	175 Sec
Discharge Effective Range	12 m
Fire Rating	IV B (4x21B + 233B = 317B)
Gross Weight	205 kg

Ordering Matrix		
Com No.	Specification	Approval
21805600	BS EN1866-1	LPCB
2180560000001	BS EN1866-1	SETSCO
2180560000002	BS EN1866-1	BV (MED)

 LINGJACK ENGINEERING WORKS PTE LTD NO.1 WOODLANDS TERRACE #03-01 LINGJACK INDUSTRIAL BUILDING SINGAPORE 738471 TEL:(65)6759 4163 FAX:(65)6758 7513 E-MAIL:COMBAT@LINGJACK.COM WEBSITE:WWW.COMBAT.COM.SG	Customer : -	Project : -			
	Title : 135 Ltr Trolley Fire Extinguisher (Foam), Cartridge (C-135FTC)				
	Drawing No. : 21805600	Com. No. :			
	This drawing contains proprietary information and should not be reproduced or use in any way without written permission from Lingjack Engineering Works Pte Ltd.		Scale : NTS	Sheet : 1/1	
		3rd Angle Projection :		Date	Description
				19.1.19	Update Technical Specification.
				03.06.13	Change of Com No. from 21805600 to 20802251 due to operation. All Specification remain.
				22.11.11	Production Drawing.
		Drawn	Approved	GA Rev	Pro Rev