



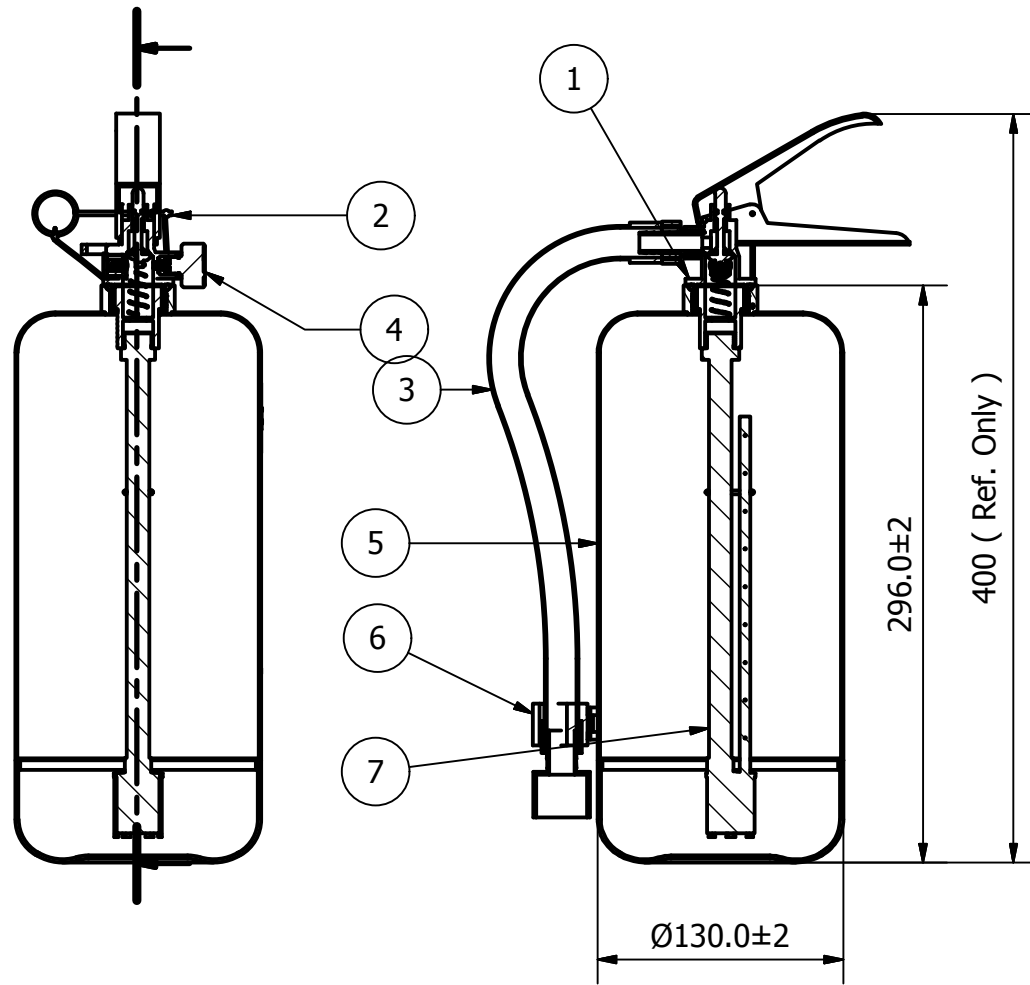

Parts List			
Item	Description	Specification	Qty.
1	Valve Assembly	Manufactured According To EN3 And PED Valve Body Material : Brass Alloys	1
2	Seal	Material : Polythylene (PE) Finishing : White	1
3	Hose Assembly With Head Set	Hose Material : PVC	1
4	Pressure Gauge	Test According To 8.4.7 Of EN3-5:1996	1
5	Empty Cylinder	Manufactured To EN3-8 And PED 2014/68/EU Test Pressure : 30 Bar Working Pressure : 20 Bar Working Temperture : -30 deg C To 60 deg C Material : Non-Alloy Steel Finishing : Red Epoxy Powder Coated	1
6	Catch	Material : Nylon Finishing : Black	1
7	Rotor Unit	Inlet Pipe Material : Nylon Outlet Pipe : PVC-U Rotor Material : Nylon	1

Technical Specification	
Description	Specification
Extinguisher Medium	Water
Working Pressure	15 Bar
Maximum Allowable Pressure	20 Bar
Test Pressure	30 Bar @ 30sec
Fire Rating	5A/21B/25F
Approval	SETSCO

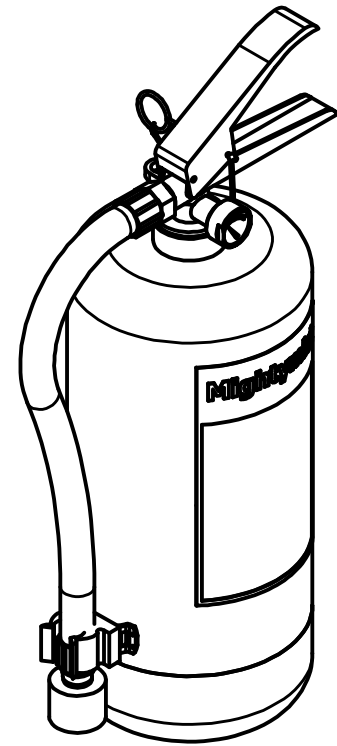

**LINGJACK ENGINEERING
WORKS PTE LTD**
NO.1 WOODLANDS TERRACE #03-01
LINGJACK INDUSTRIAL BUILDING
SINGAPORE 738471
TEL:(65)6759 4163 FAX:(65)6758 7513
E-MAIL:COMBAT@LINGJACK.COM
WEBSITE:WWW.COMBAT.COM.SG

Customer : -		Project : -		
Title : Watermist Portable Fire Extinguisher, Stored Pressure 2L (EX-WM2) - Brand: Mightymist				
Drawing No. : 20809256		Com. No. : 2080925600000		
		This drawing contains proprietary information and should not be reproduced or use in any way without written permission from Lingjack Engineering Works Pte Ltd.	Scale :	Sheet :
			NTS	1/1
		3rd Angle Projection :		

07.05.18	Production Drawing.	Zaw Min	Lucas	00	A
Date	Description	Drawn	Approved	GA Rev	Pro Rev