



LINGJACK

林傑

2 1/2" BIB NOSE SCREW TYPE PRESSURE REGULATING VALVE


Model : DH6I

Specification :

- Design Pressure : 20 bar
- Seat Test Pressure : 22 bar
- Body Test Pressure : 30 bar
- Working Temperature : 0°C - 38°C
- Operating Inlet Pressure : 7.5 bar to 20 bar
- Static Pressure Setting : 7.2 bar
- Flow Rate : Refer Flow Chart
- Outlet Running Pressure : 2 bar to 7 bar
(Optional Higher Running Pressure Upon Request)
- Body Material : Gunmetal LG2
- Hand Wheel Material : Cast Iron
(Optional LG2 Material Upon Request)
- Accessories : Plastic Blank Cap
(Optional LG2 Blank Cap Upon Request)
- Finishing : Red
- Gross Weight : Approximate 10.5 kg

Features :

- Maintenance Free
- Minimum Friction Loss, High Flow Rate
- Excellence Finish
- Optional Inlet Size/Type

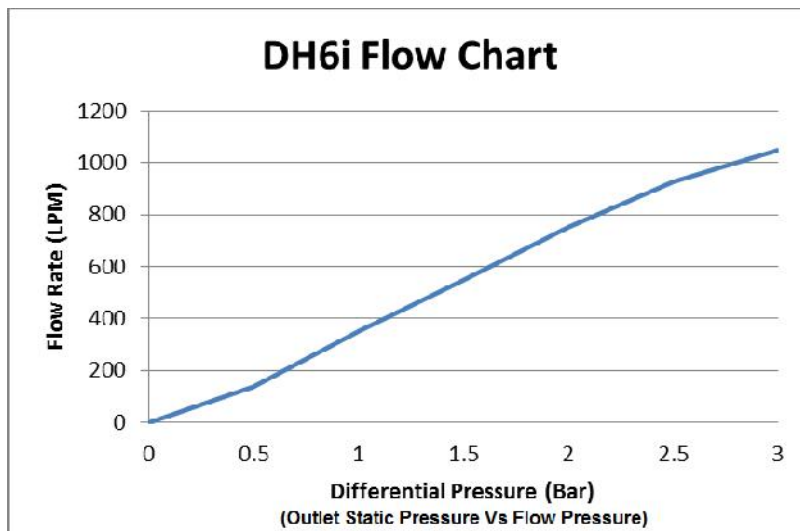

Pressure/Temperature Rating :

Temp (C)	-10 to 66	100	120	150	170	180	186	198	200	220	250	260
PN16 (Bar)	16.0	16.0	16.0	16.0	16.0	16.0	15.3	13.7	13.5	11.3	8.0	7.0

Standards : Manufactured in accordance with BS5041-1 : 1987

Approvals : LPCB (UK) , SETSCO (SG)

Origin : Made in Singapore



Ordering Matrix :

Com No.	Inlet	Outlet	Approval
03041000	2 1/2" BSPT(M) Thread	2 1/2" BS336 Female Instantaneous	LPCB
03041003	2 1/2" BSPT(M) Thread	2 1/2" BS336 Female Instantaneous	LPCB c/w Steel Rope
90800115	2 1/2" BSPT(M) Thread	2 1/2" BS336 Female Instantaneous	SETSCO
90800123	2 1/2" BSPT(M) Thread	2 1/2" BS336 Female Instantaneous	SETSCO c/w Steel Rope

GOOD QUALITY GREAT SERVICES

www.lingjack.com

LEW-MDS-DH6I(S) Rev02 (May23)
Specification subjects to change without prior notice