



LINGJACK

林傑

2 WAY NON-CONTROLLABLE PILLAR HYDRANT

MODEL : PH-100

Specification :

- Outlet : 2 ½" LVT Male Thread
- Design Pressure : 16 bar
- Test Pressure : 25 bar
- Design Temperature : 5 Deg C to 38 Deg C
- Body Material : Ductile Iron
- Flow Rate : 818 lpm @ 2.3 bar Inlet
- K-Factor : 539
- Gross Weight : Approximate 40 kg

Features :

- Easy to Maintain
- Full Compliance to PUB Design
- For Private & Public Installation



Standards : Built to BS EN 14384 : 2005

Tested By : SETSCO

Origin : Made in Singapore

Ordering Matrix :

Com No.	Inlet Connection	Color
03031100	4" PN16 FF Flange	Red
90800910	4" PN16 FF Flange	Red with Yellow Band

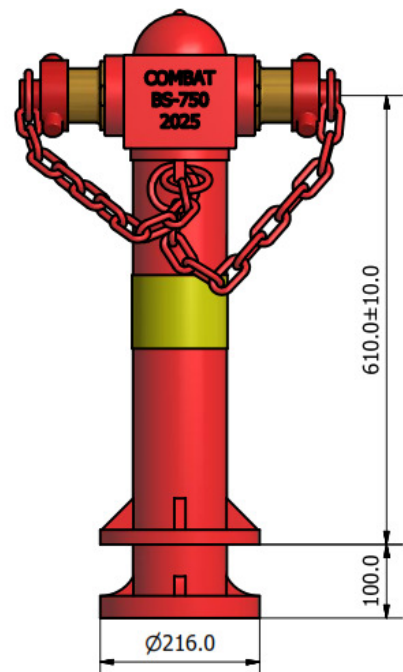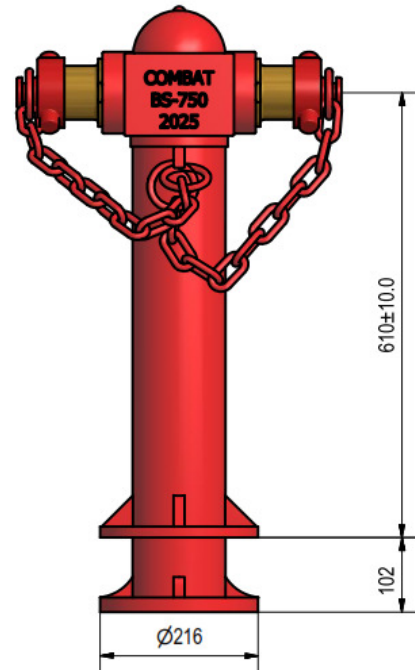

GOOD QUALITY GREAT SERVICES

www.lingjack.com

LEW-MDS-PH100 Rev02 (Jul25)
Specification subjects to change without prior notice