



LINGJACK

林傑

2 WAY CONTROLLABLE PILLAR HYDRANT

MODEL : PH-100C

Specification :

- Outlet Control : 2 ½" Oblique Valve
(Optional Valve Type Upon Request)
- Outlet : 2 ½" BS 336 Female Instantaneous Coupling
- Design Pressure : 16 bar
- Test Pressure : 25 bar
- Design Temperature : 5 Deg C to 38 Deg C
- Body Material : Ductile Iron
- Flow Rate : 802 lpm @ 2.3 bar Inlet
- K-Factor : 507
- Gross Weight : Approximate 42.5 kg

Features :

- Easy to Maintain
- For Private & Public Installation
- Heavy Duty
- Long Life


Standards : Built to BS EN 14384 : 2005

Tested By : SETSCO

Origin : Made in Singapore

Ordering Matrix :

Com No.	Inlet Connection	Outlet Valve	Color
03031800	4" ANSI#150 RF Flange	2 ½" Oblique	Red
03031801	4" PN16 FF Flange	2 ½" Oblique	Red

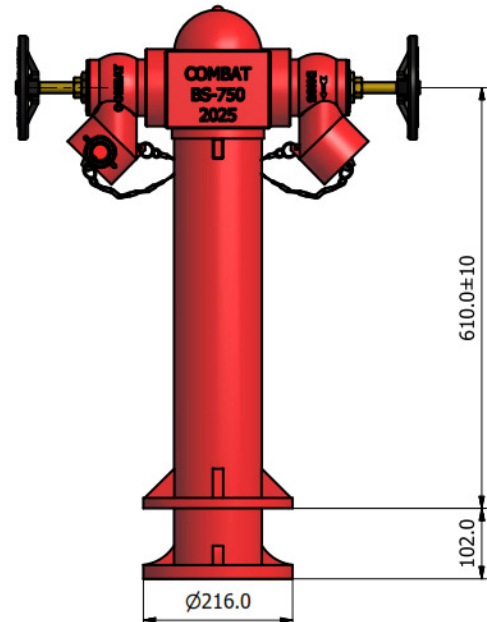

GOOD QUALITY GREAT SERVICES

www.lingjack.com

LEW-MDS-PH100C Rev02 (Jul25)
Specification subjects to change without prior notice