



LINGJACK


林傑

2 1/2" BIB NOSE DIAPHRAGM VALVE

Model : DV-BNF25

Specification :

- Design Pressure : 15 bar
- Seat Test Pressure : 16.5 bar
- Body Test Pressure : 22.5 bar
- Working Temperature : 0°C ~ 55°C
- K-factor = 726 @ Inlet Pressure 4.7 bar
- Flow Rate : 590 Lpm
- Material : Gunmetal LG2
- Diaphragm Material : EPDM
- Accessories : Plastic Blank Cap with SS Chain
(Optional LG2 Blank Cap Upon Request)
- Finishing : Bare
- Gross Weight : Approximate 12 kg

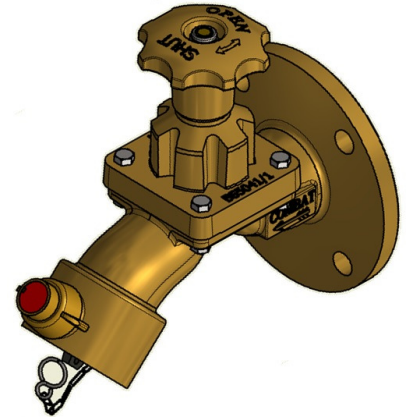

Features :

- Minimum Maintenance
- Heavy Duty Design
- Excellence Quality
- High Flow Rate
- Diaphragm is easily replaceable

Standards : Manufactured in accordance with BS5041-1 : 1987

Fire Test : To BS5041-1: 1987, Section A.5 (High temperature resistance test)

Approvals : LPCB (UK)

Origin : Made in Singapore

Ordering Matrix :

Com No.	Inlet Connection	Outlet Connection
03223700	3" ANSI#150 FF Flange	2 1/2" BS336 Instantaneous
03223734	3" ANSI#150 FF Flange	Integrated 2 1/2" BS336 Instantaneous
03223727	2 1/2" PN16 Flange	2 1/2" BS336 Instantaneous



GOOD QUALITY GREAT SERVICES

www.lingjack.com

LEW-MDS-BNLPDV Rev03 (Feb25)
Specification subjects to change without prior notice