


Parts List				
Item	Description	Specification	Com No.	Qty.
1	Pressure Gauge	Working Temperature Range : -20 deg C To 60 deg C	03000200	1
2	Hook Bracket	Material : 1.5mm Mild Steel Finishing : Chrome Plated	03021500	1
3	Artwork	Silkscreen	NA	1
4	Valve Assembly	Model 06E20	03129600	1
5	Discharge nozzle	Material : UPVC Plastic	03003900	1
6	Medium	40% ABC Dry Chemical Powder	03024700	1Kg
7	Syphon Tube	Material : UPVC Plastic	03031000	1
8	Empty Cylinder	Material : JISG3141 Cold Roll Sheet Finishing : Red Epoxy Powder Coated	03066100	1

Technical Specification	
Description	Specification
Working Temperature	-20 deg C To 60 deg C
Working Pressure	14 Bar
Test Pressure, PT	27 Bar @ 30 Sec
Maximum Allowable Pressure, PS	18 Bar
Fire Rating	5A/21B
Gross Weight (Approx.)	2.09 Kg

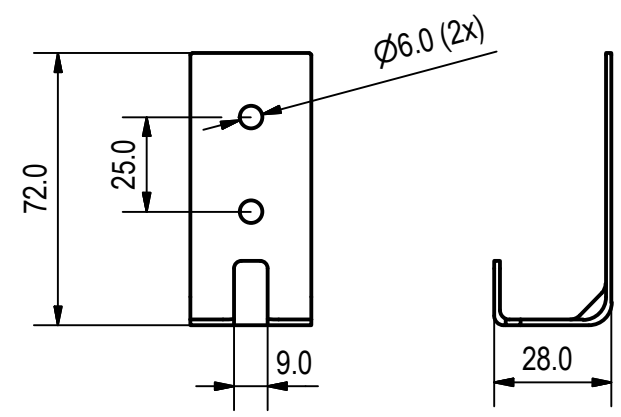

Ordering Matrix			
Com No.	Brand	Approval	Remarks
20800809 00000	COMBAT	LPCB	BS EN3
20800800 00000	COMBAT	TUV	SS EN3

<p>LINGJACK ENGINEERING WORKS PTE LTD NO.1 WOODLANDS TERRACE #03-01 LINGJACK INDUSTRIAL BUILDING SINGAPORE 738471 TEL:(65)6759 4163 FAX:(65)6758 7513 E-MAIL:COMBAT@LINGJACK.COM WEBSITE:WWW.COMBAT.COM.SG</p>	Customer :	Project :							
	Title : DCP ABC Portable Fire Ext, Stored Pressure 1KG (C-1ASE)								
	Drawing No. : 20800809	Com. No. : -							
	This drawing contains proprietary information and should not be reproduced or use in any way without written permission from Lingjack Engineering Works Pte Ltd.		Scale : NTS	Sheet : 1/1	5.5.25	B fire rating change from 55B to 21B	ZhuYik	Lucas	00
		3rd Angle Projection :		10.02.09	Approved Drawing	TanCP	Lucas	00	A
				Date	Description	Drawn	Approved	GA Rev	Pro Rev