

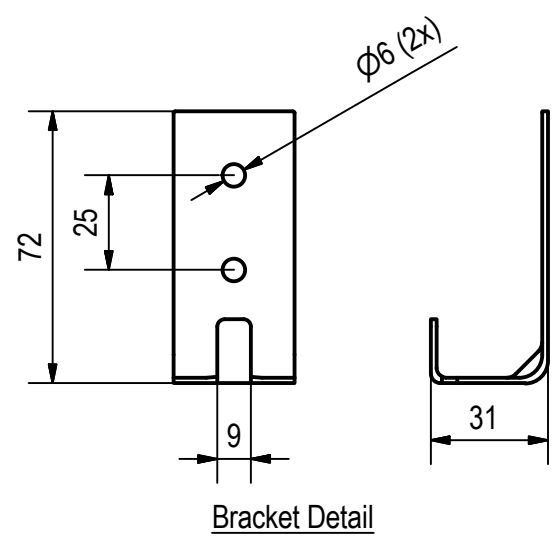


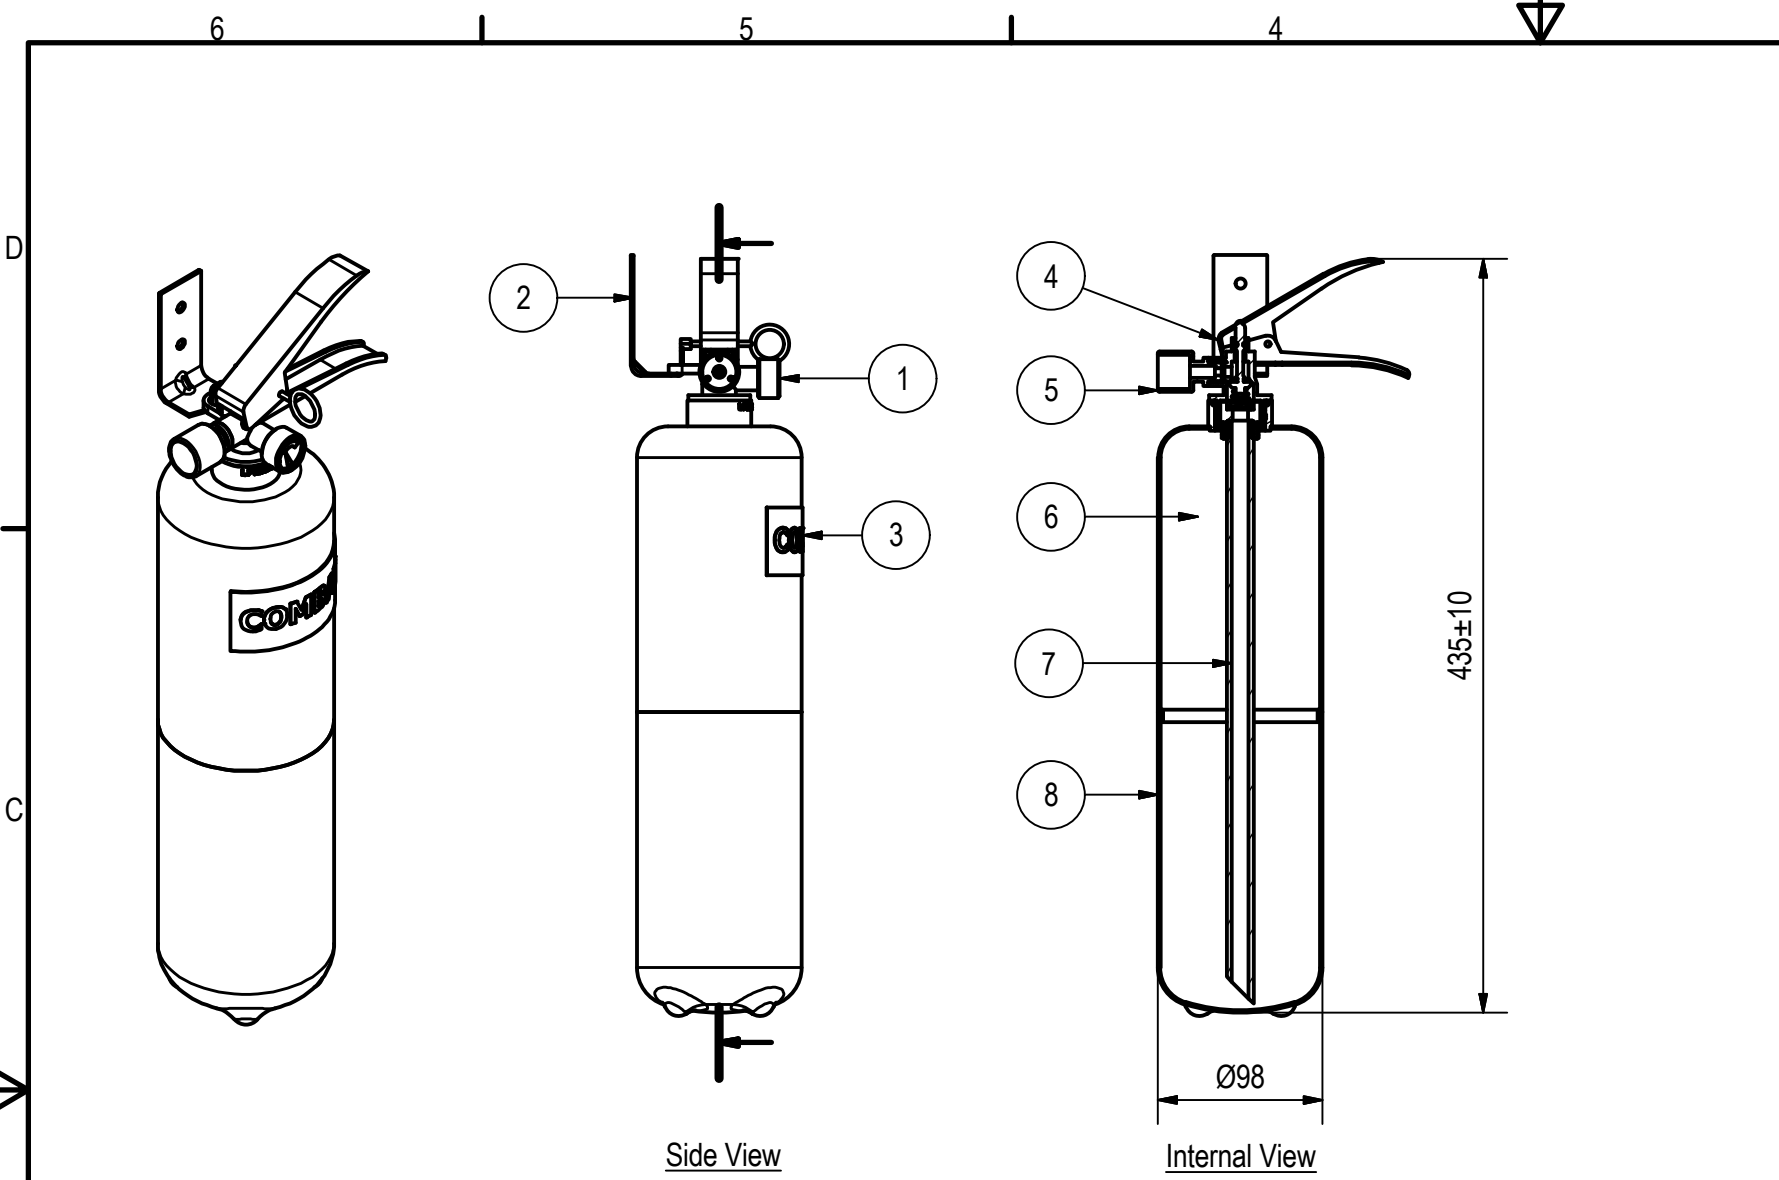

Parts List				
Item	Description	Specification	Com No.	Qty.
1	Pressure Gauge	Working Temperture Range : -20 deg C To 60 deg C	03000200	1
2	Hook Bracket	Materials :1.5mm Mild Steel Finishing : Chrome Plated	03021500	1
3	Artwork	Silkscreen	NA	1
4	Valve Assembly	Model 06E20	03129600 / 03013103	1
5	Discharge nozzle	Material : UPVC Plastic	03003900	1
6	Medium	40% ABC Dry Chemical Powder	03024700	2Kg
7	Syphon Tube	Material : UPVC Plastic	03036800	1
8	Empty Cylinder	Material : JISG3141 1.5mm Cold Roll Sheet Finishing : Red Epoxy Powder Coated	03066300	1

Technical Specification	
Description	Specification
Working Temperature	-20 deg C To 60 deg C
Working Pressure	14 Bar
Test Pressure, PT	27 Bar @ 30 Sec
Maximum Allowable Pressure, PS	18 Bar
Fire Rating	13A/55B
Gross Weight	3.65 Kg

Ordering Matrix			
Com No.	Brand	Approval	Remarks
20801018 00000	COMBAT	LPCB	BS EN3
20801000 00000	COMBAT	TUV	SS EN3



**LINGJACK ENGINEERING
WORKS PTE LTD**
NO.1 WOODLANDS TERRACE #03-01
LINGJACK INDUSTRIAL BUILDING
SINGAPORE 738471
TEL:(65)6759 4163 FAX:(65)6758 7513
E-MAIL:COMBAT@LINGJACK.COM
WEBSITE:WWW.COMBAT.COM.SG

Customer :
Title : DCP ABC Portable Fire Ext, Stored Pressure 2KG (C-2ASE)
Drawing No. : 20801018

Project :
Com. No. :
This drawing contains proprietary information and should not be reproduced or use in any way without written permission from Lingjack Engineering Works Pte Ltd.

Scale : NTS
3rd Angle Projection : 

Sheet : 1/1

10.02.09
Date

Approval Drawing.

10.02.09
Date

Approval Drawing.

Tan CP
Drawn

Lucas
Approved

00
GA Rev

A
Pro Rev