


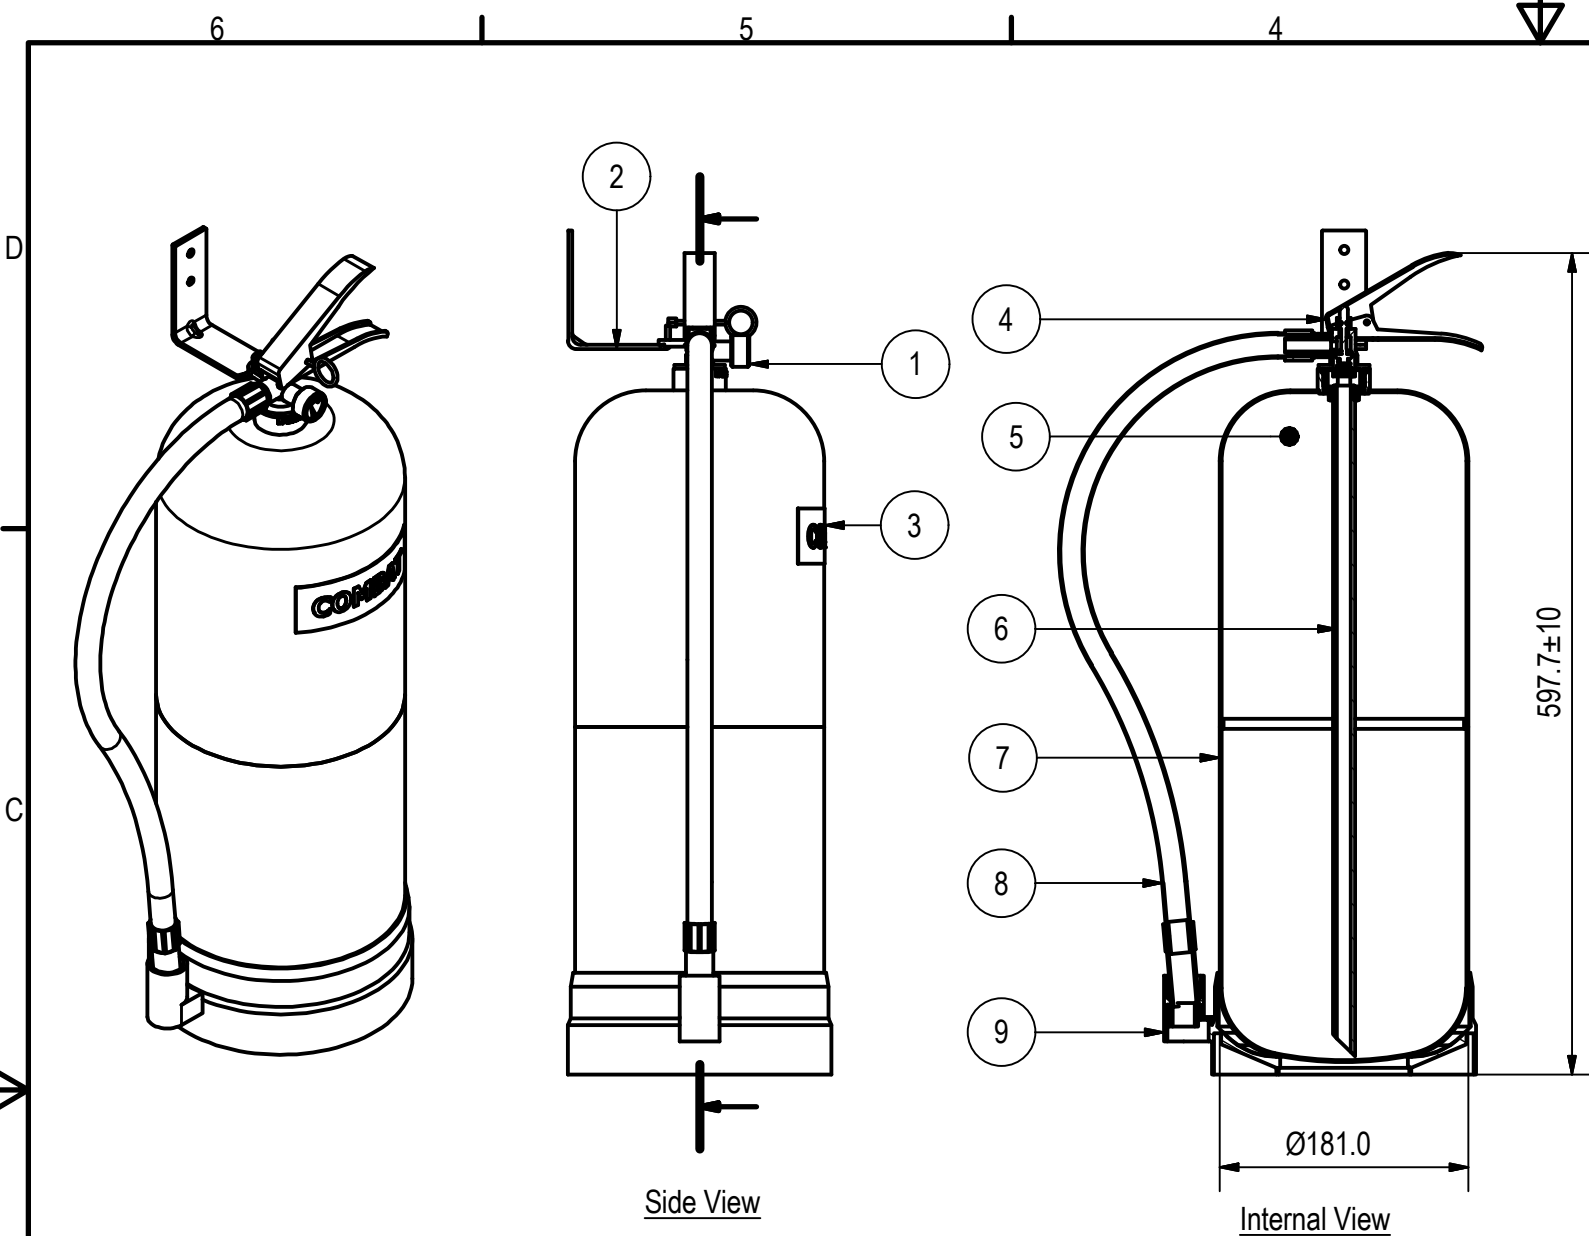

Parts List				
Item	Description	Specification	Com No.	Qty.
1	Pressure Gauge	Working Temperture Range : -20 deg C To 60 deg C	03000200	1
2	Hook Bracket	Material : 1.5mm Mild Steel Finishing : Chrome Plated	03021700	1
3	Artwork	Silkscreen	NA	1
4	Valve Assembly	Model 06E20	03013103	1
5	Medium	Monnex Powder	03025100	9Kg
6	Syphon Tube	Material : UPVC Plastic	03032500	1
7	Empty Cylinder	Material : JISG3141 Cold Roll Sheet, 1.5mm Thick Finishing : Red Epoxy Powder Coated	03098100	1
8	Hose And Horn	Material (Hose) : Black Braided PVC Material (Nozzle) : UPVC Plastic	03002601	1
9	Plastic Skirt	Material : UPVC Plastic	03065800	1

Technical Specification	
Description	Specification
Working Temperature	-20 deg C To 60 deg C
Working Pressure	14 Bar
Test Pressure, PT	27 Bar @ 30 Sec
Maximum Allowable Pressure, PS	18 Bar
Fire Rating	233B
Gross Weight	13.2 Kg

Ordering Matrix			
Com No.	Brand	Approval	Remarks
20804601 00000	COMBAT	LPCB	BS EN3
20804601 00001	COMBAT	TUV	SS EN3 (Was 20804600)

 LINGJACK ENGINEERING WORKS PTE LTD NO.1 WOODLANDS TERRACE #03-01 LINGJACK INDUSTRIAL BUILDING SINGAPORE 738471 TEL:(65)6759 4163 FAX:(65)6758 7513 E-MAIL:COMBAT@LINGJACK.COM WEBSITE:WWW.COMBAT.COM.SG	Customer : -	Project : -							
	Title : Monnex Portable Fire Ext, Stored Pressure 9KG (C-9MSE)								
	Drawing No. : 20804601	Com. No. :							
		This drawing contains proprietary information and should not be reproduced or use in any way without written permission from Lingjack Engineering Works Pte Ltd.	Scale : NTS	Sheet : 1/1					
			3rd Angle Projection :		Date	Description	Drawn	Approved	GA Rev Pro Rev