




Parts List				
Item	Description	Specification	Com No.	Qty.
1	Pressure Gauge	Working Temperture Range : -20 deg C To 60 deg C	03000200	1
2	Hook Bracket	Material : 1.5mm Mild Steel Finishing : Chrome Plated	03021700	1
3	Artwork	Silkscreen	NA	1
4	Valve Assembly	Model 06E20	03013103	1
5	Medium	Purple K Powder	03025000	9Kg
6	Syphon Tube	Material : UPVC Plastic	03032500	1
7	Empty Cylinder	Material : JISG3141 Cold Roll Sheet, 1.5mm Thick Finishing : Red Epoxy Powder Coated	03098100	1
8	Hose And Horn	Material (Hose) : Black Braided PVC Material (Nozzle) : UPVC Plastic	03002601	1
9	Plastic Skirt	Material : UPVC Plastic	03065800	1

Technical Specification	
Description	Specification
Working Temperature	-20 deg C To 60 deg C
Working Pressure	14 Bar
Test Pressure, PT	27 Bar @ 30 Sec
Maximum Allowable Pressure, PS	18 Bar
Fire Rating	233B
Gross Weight	13.2 Kg

Ordering Matrix			
Com No.	Brand	Approval	Remarks
20804502 00000	COMBAT	LPCB	BS EN3
20804502 00001	COMBAT	TUV	SS EN3 (Was 280804500)

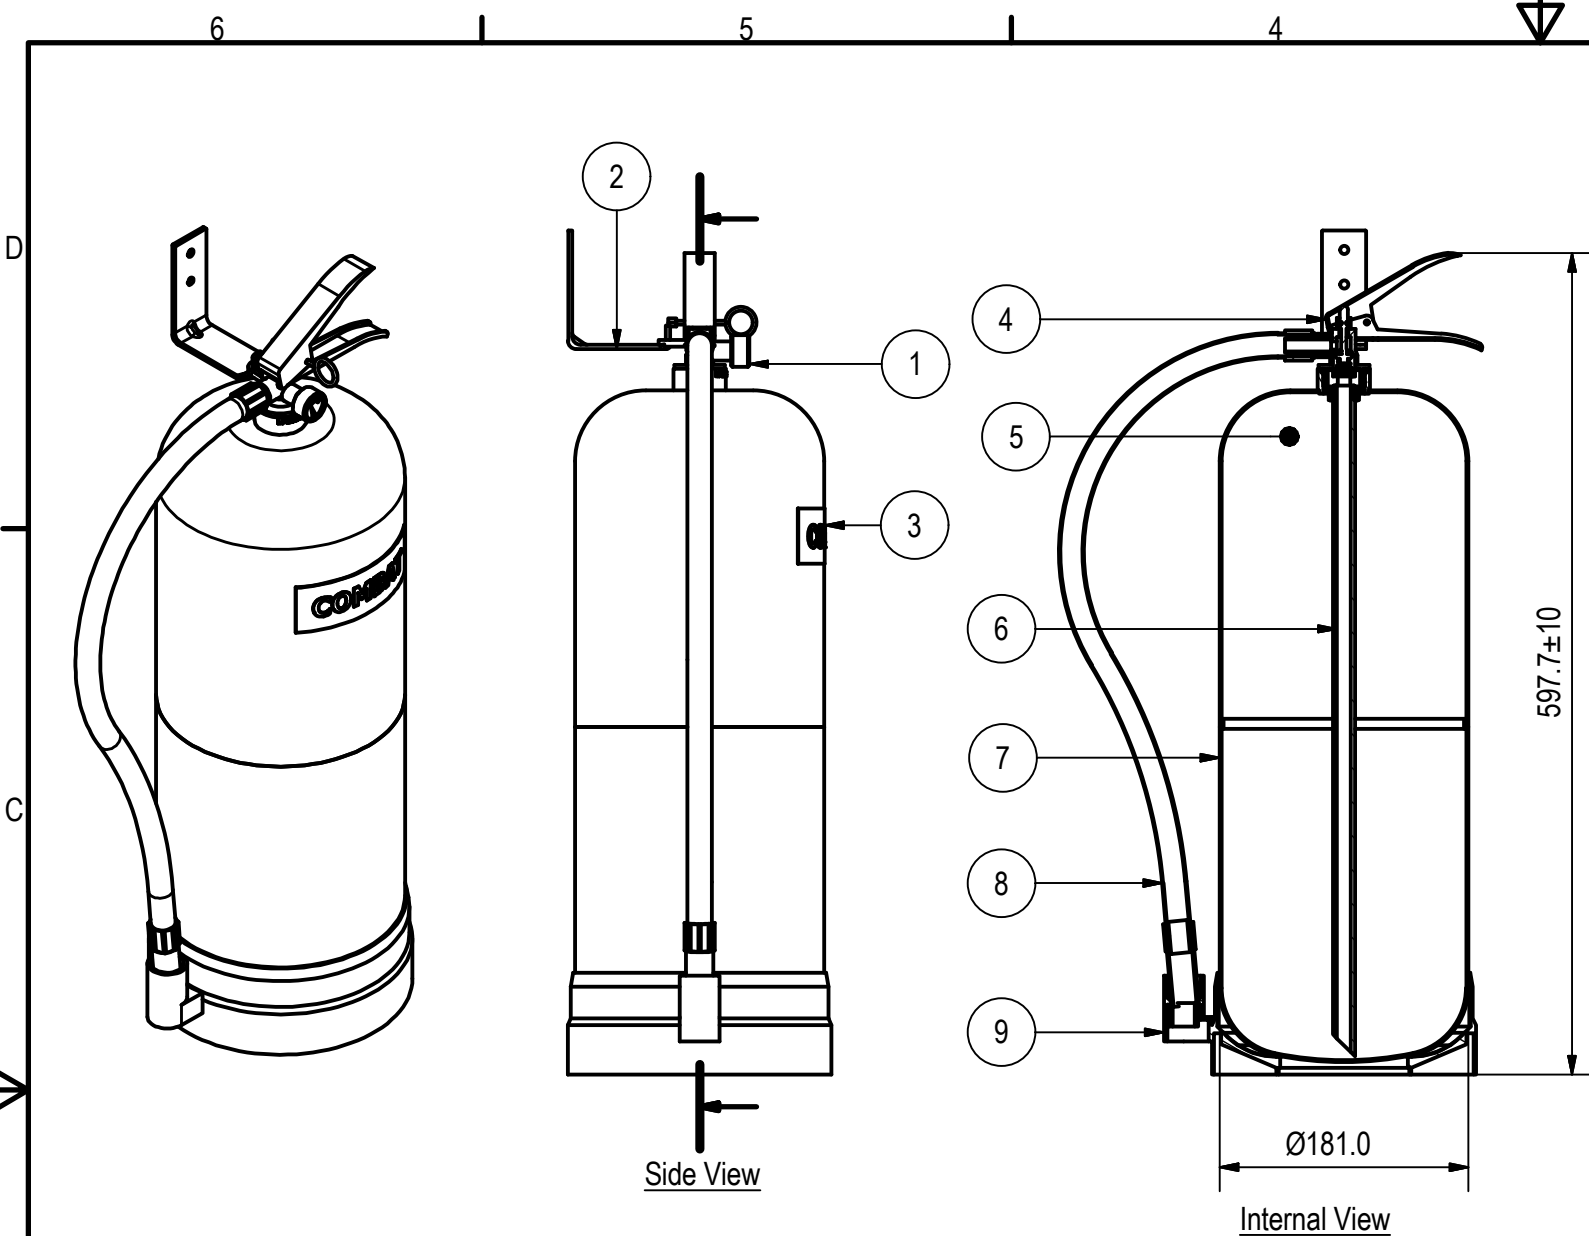

LINGJACK ENGINEERING WORKS PTE LTD
NO.1 WOODLANDS TERRACE #03-01
LINGJACK INDUSTRIAL BUILDING
SINGAPORE 738471
TEL:(65)6759 4163 FAX:(65)6758 7513
E-MAIL:COMBAT@LINGJACK.COM
WEBSITE:WWW.COMBAT.COM.SG

Customer : -

Title : Purple K Portable Fire Ext, Stored Pressure 9KG (C-9PKSE)

Drawing No. : 20804502

Com. No. :

This drawing contains proprietary information and should not be reproduced or use in any way without written permission from Lingjack Engineering Works Pte Ltd.

Scale : NTS

Sheet : 1/1

3rd Angle Projection : 

19.10.11

Production Drawing.

Ken

Lucas

00

A

Date

Description

Drawn

Approved

GA Rev

Pro Rev