


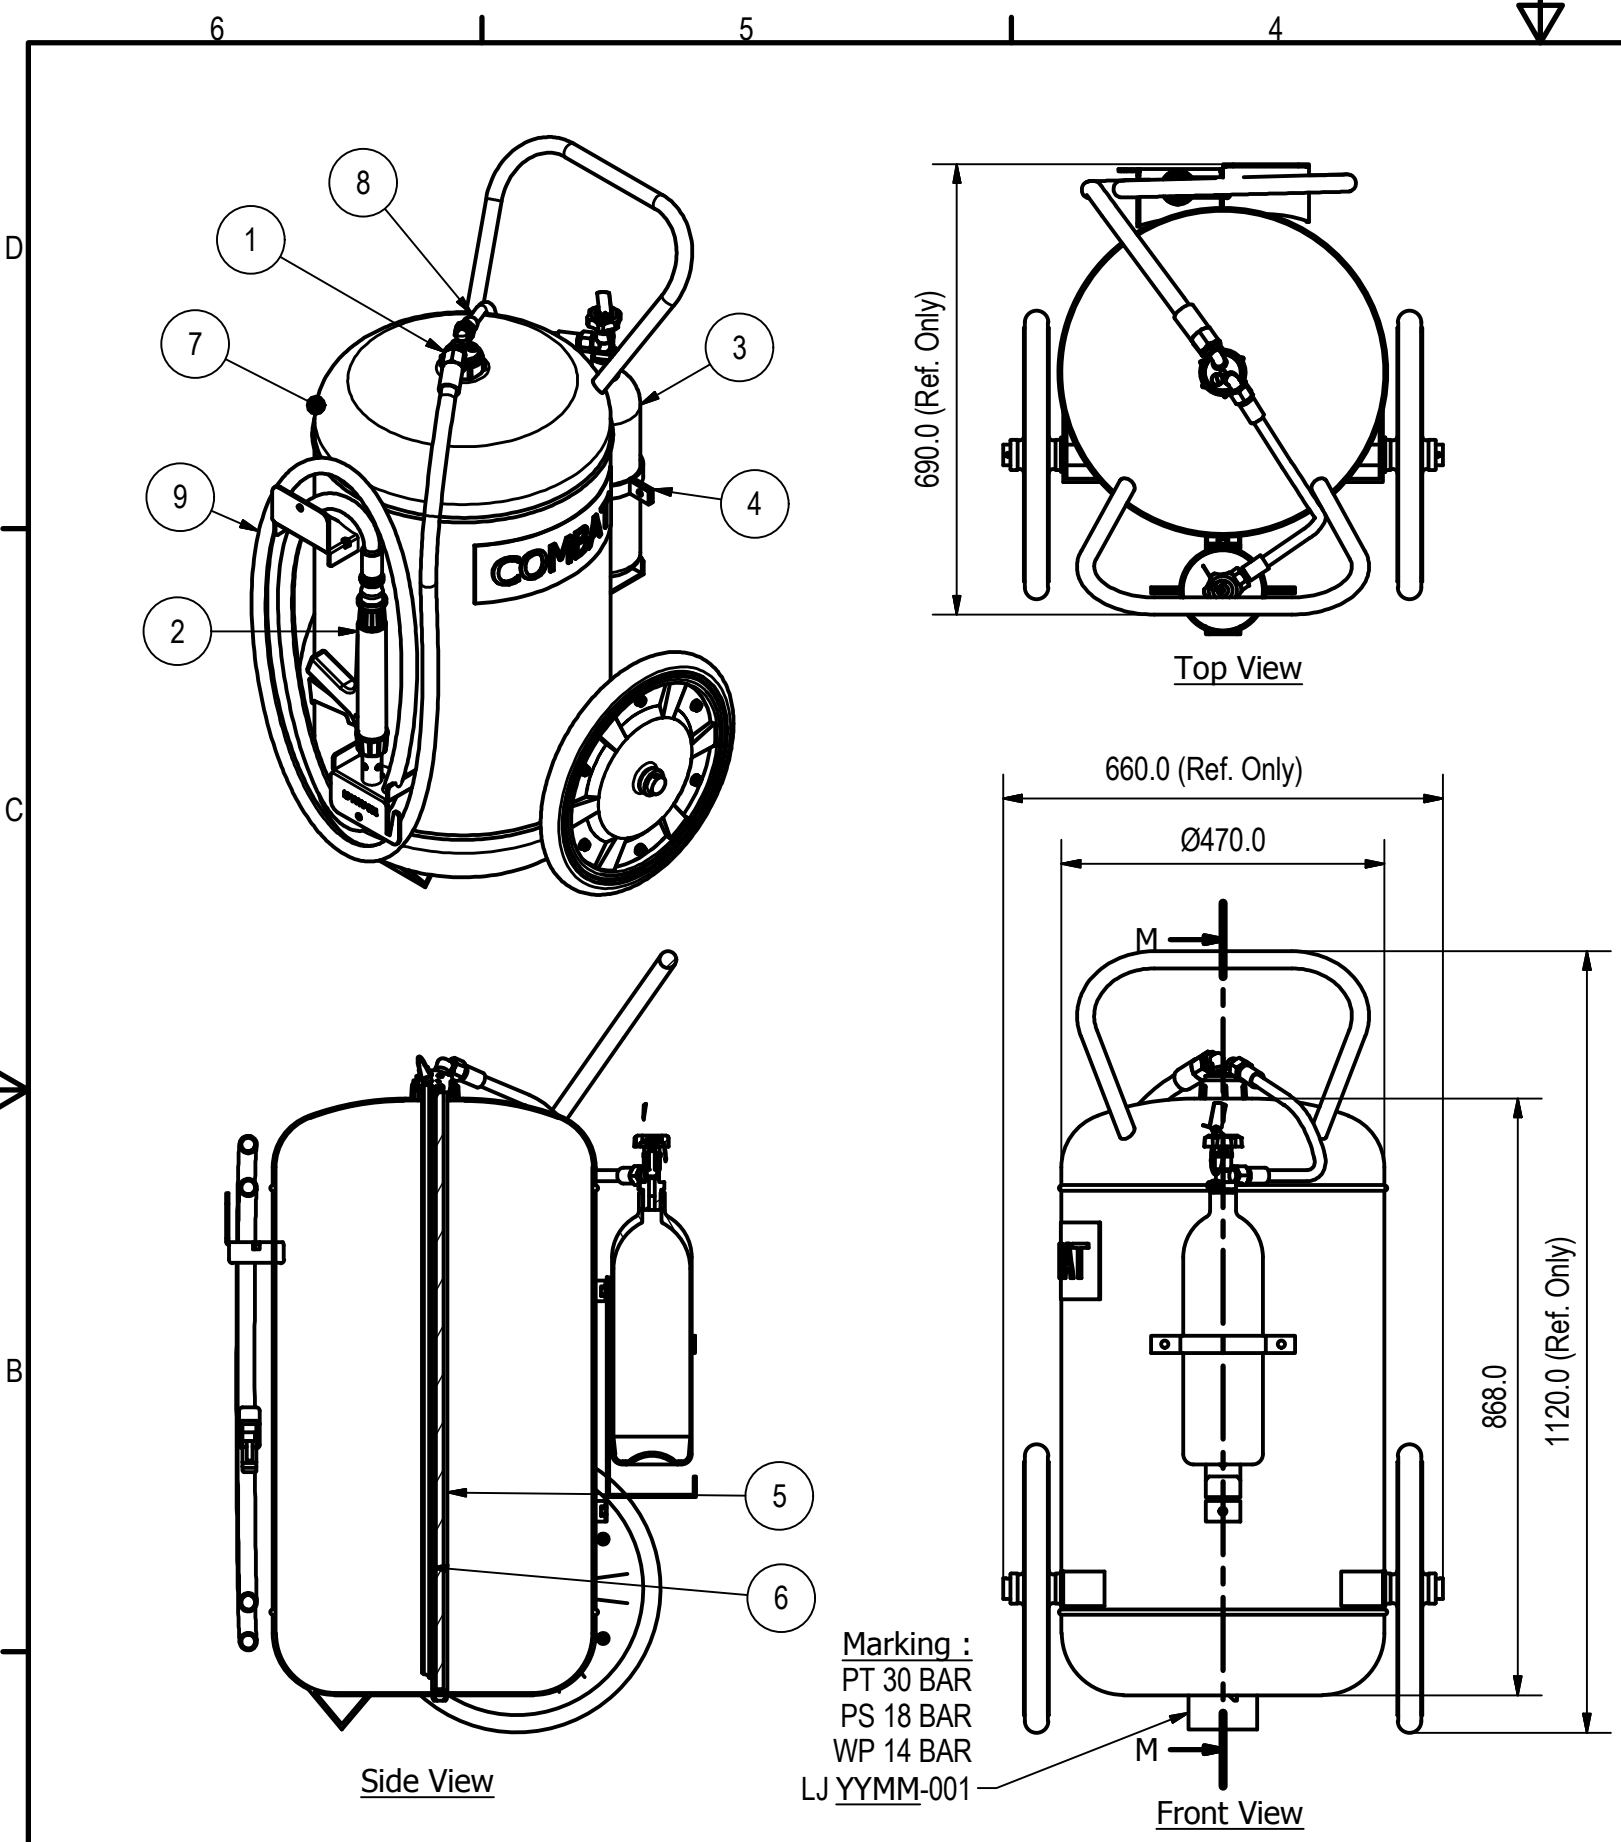

PARTS LIST				
Item	Description	Material	Com No	Qty
1	Air Release Valve Assembly	Brass CZ121	03001706	1
2	Foam Controllable Discharge Gun Assembly	PVC	03079206	1
3	2KG CO2 Cartridge Complete	Cast Iron	03191601	1
4	Cartridge Holder	Steel	03237773	1
5	Discharge Tube for 100kg Cylinder	Steel	03237783	1
6	Syphone Tube for 100Kg Cylinder	PVC	03237784	1
7	100L Cylinder With 16in Wheel	JIS3131 Hot Roll Sheet 3.6mm Thick	03067607	1
8	Heavy Duty High Pressure Hose Assembly	Rubber	03003207	1
9	0.75in Hose Assembly	Rubber	03003303	1

Technical Specification	
Description	Specification
Extinguisher Medium	AFFF
Working Temperature	5 To 60DegC
Max. Allowable Pressure, PS	18 Bar
Operating Pressure	14 Bar
Discharge Time	150 Sec
Discharge Effective Range	10 m
Fire Rating	34A/IV B (4x21B + 233B = 317B)
Gross Weight	165 kg

Ordering Matrix			
Com No.	Brand	Approval	Remarks
21805500 00000	COMBAT	LPCB	BS EN1866-1
21805500 00001	COMBAT	TUV	BS EN1866-1

LINGJACK ENGINEERING WORKS PTE LTD
NO.1 WOODLANDS TERRACE #03-01
LINGJACK INDUSTRIAL BUILDING
SINGAPORE 738471
TEL:(65)6759 4163 FAX:(65)6758 7513
E-MAIL:COMBAT@LINGJACK.COM
WEBSITE:WWW.COMBAT.COM.SG

Customer :
Title : 100L Trolley Fire Extinguisher (Foam), Cartridge (C-100FTC)
Drawing No. : 21805500
Com. No. :

This drawing contains proprietary information and should not be reproduced or use in any way without written permission from Lingjack Engineering Works Pte Ltd.

Scale : NTS
Sheet : 1/1
3rd Angle Projection :

28.11.11
Date

Production Drawing.

Fung Lucas 00 A
Drawn Approved GA Rev Pro Rev