


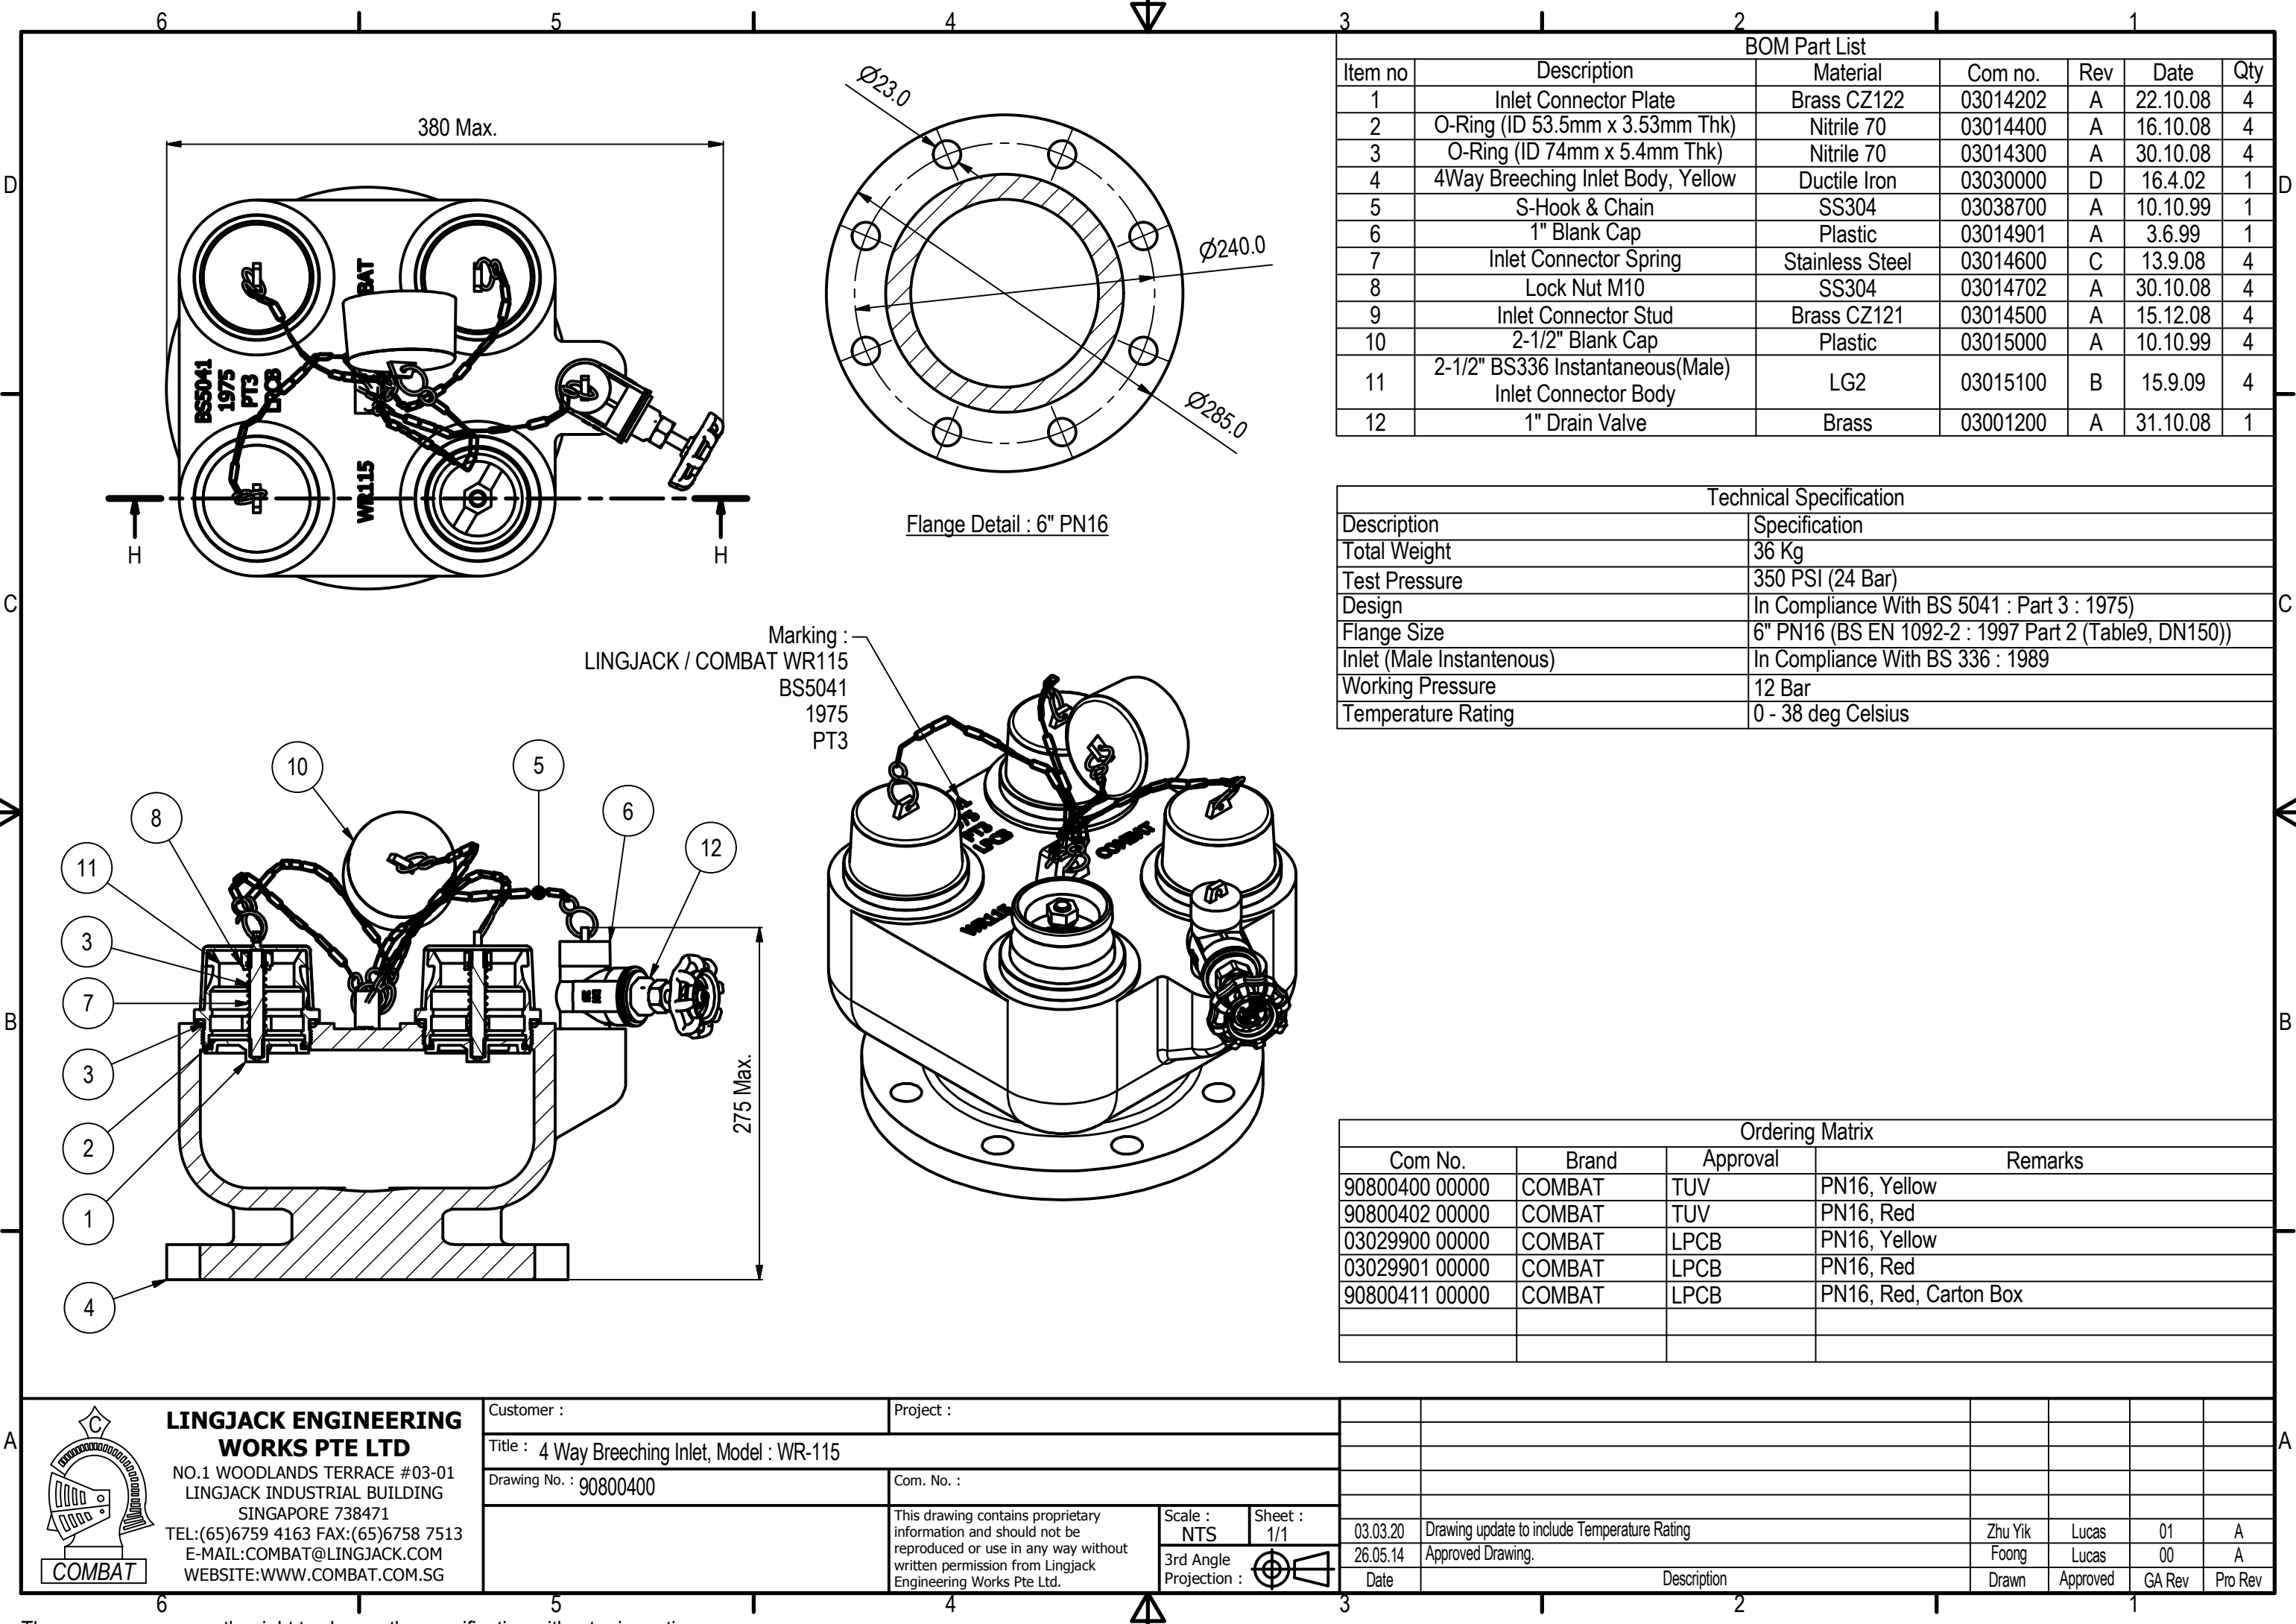

| BOM Part List |                                                          |                 |          |     |          |     |
|---------------|----------------------------------------------------------|-----------------|----------|-----|----------|-----|
| Item no       | Description                                              | Material        | Com no.  | Rev | Date     | Qty |
| 1             | Inlet Connector Plate                                    | Brass CZ122     | 03014202 | A   | 22.10.08 | 4   |
| 2             | O-Ring (ID 53.5mm x 3.53mm Thk)                          | Nitrile 70      | 03014400 | A   | 16.10.08 | 4   |
| 3             | O-Ring (ID 74mm x 5.4mm Thk)                             | Nitrile 70      | 03014300 | A   | 30.10.08 | 4   |
| 4             | 4Way Breeching Inlet Body, Yellow                        | Ductile Iron    | 03030000 | D   | 16.4.02  | 1   |
| 5             | S-Hook & Chain                                           | SS304           | 03038700 | A   | 10.10.99 | 1   |
| 6             | 1" Blank Cap                                             | Plastic         | 03014901 | A   | 3.6.99   | 1   |
| 7             | Inlet Connector Spring                                   | Stainless Steel | 03014600 | C   | 13.9.08  | 4   |
| 8             | Lock Nut M10                                             | SS304           | 03014702 | A   | 30.10.08 | 4   |
| 9             | Inlet Connector Stud                                     | Brass CZ121     | 03014500 | A   | 15.12.08 | 4   |
| 10            | 2-1/2" Blank Cap                                         | Plastic         | 03015000 | A   | 10.10.99 | 4   |
| 11            | 2-1/2" BS336 Instantaneous(Male)<br>Inlet Connector Body | LG2             | 03015100 | B   | 15.9.09  | 4   |
| 12            | 1" Drain Valve                                           | Brass           | 03001200 | A   | 31.10.08 | 1   |

| Technical Specification   |                                                      |
|---------------------------|------------------------------------------------------|
| Description               | Specification                                        |
| Total Weight              | 36 Kg                                                |
| Test Pressure             | 350 PSI (24 Bar)                                     |
| Design                    | In Compliance With BS 5041 : Part 3 : 1975)          |
| Flange Size               | 6" PN16 (BS EN 1092-2 : 1997 Part 2 (Table9, DN150)) |
| Inlet (Male Instantenous) | In Compliance With BS 336 : 1989                     |
| Working Pressure          | 12 Bar                                               |
| Temperature Rating        | 0 - 38 deg Celsius                                   |

| Ordering Matrix |        |          |                       |
|-----------------|--------|----------|-----------------------|
| Com No.         | Brand  | Approval | Remarks               |
| 90800400 00000  | COMBAT | TUV      | PN16, Yellow          |
| 90800402 00000  | COMBAT | TUV      | PN16, Red             |
| 03029900 00000  | COMBAT | LPCB     | PN16, Yellow          |
| 03029901 00000  | COMBAT | LPCB     | PN16, Red             |
| 90800411 00000  | COMBAT | LPCB     | PN16, Red, Carton Box |
|                 |        |          |                       |
|                 |        |          |                       |

<