




# LINGJACK 林傑

## 2" IN-LINE PRESSURE REGULATING VALVE

Model : DF1

### Specification :

- Inlet : 2" BSP(F) Thread
- Outlet : 2" BSP(F) Thread
- Design Pressure : 20 bar
- Seat Test Pressure : 22 bar
- Body Test Pressure : 30 bar
- Working Temperature : 0°C - 38°C
- Operating Inlet Pressure : 5 bar to 20 bar
- K-factor = 93 @ Inlet Pressure 15 bar
- K-factor = 140 @ Inlet Pressure 10 bar
- Flow Rate : 280 Lpm @ 4 bar Drop
- Outlet Running Pressure : 2 bar to 6 bar  
(Optional Higher Running Pressure Till 10 bar Upon Request)
- Body Material : Gunmetal LG2
- Hand Wheel Material : Cast Iron  
(Optional LG2 Material Upon Request)
- Finishing : Red
- Gross Weight : Approximate 4.3 kg

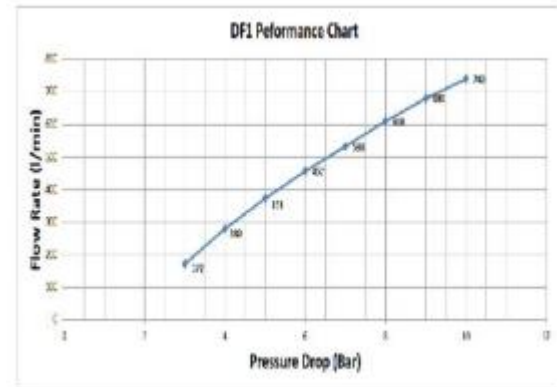

### Features :

- Balance Pressure Control Mechanism
- Could be Manufacture to Flange Inlet and Outlet  
(Optional Upon Request)
- Shut Down Feature Design Available

**Standards :** Manufactured in accordance with EN1074-5

**Approvals :** SETSCO ( SG )

**Origin :** Made in Singapore

Ordering Matrix :

Com No.	Inlet & Outlet Connection	Remarks
03186800	2" BSP(F) Thread	W/o Shut Down Function
03186802	1 1/2" BSP(F) Thread	W/o Shut Down Function
03220004	2" BSPT(F) Thread	Cw Hand Wheel Shut Down

