



# LINGJACK

## 林傑

### 1''x30m Automatic Fixed Super Slim Hosereel

**MODEL : HR-1ASF**

#### Specification :

- Inlet : 1'' BSP (F) Thread
- Hose Size : 1'' x 30m
- Design Pressure : 12 bar
- Working Temperature : 5 Deg C to 55 Deg C
- Hydrostatic Test Pressure : 18 bar at 5 mins
- Material : Electro Galvanized Plate
- Brass Jet/Spray Nozzle :  
Flowrate Jet 71 Lpm / Throw 10.8m @ 6 Bar Inlet, K-Factor 29
- Nickel Chrome Plate Brass Jet Nozzle :  
Flowrate 46 Lpm / Throw 10.8m @ 6 Bar Inlet, K-Factor 19
- Finishing : Red Color RAL 3000
- Gross Weight : Approximate 29.0 kg

#### Features :

- Outdoor UV Resistance Polyester Powder Coated Hose Reel
- High Quality Red Semi-Rigid Fire Hose Approved to EN694:2014
- Easy to Maneuver
- Slim Feature for Ease of Storage Space


**Standards :** Manufactured in accordance with EN 671-1:2012

**Approvals :** LPCB (UK),

**Origin :** Made in Singapore

Ordering Matrix :

Com No.	Nozzle Type	Flowrate / Throw	K-Factor	Approval
80800403	Chrome Plated Brass Jet	46 Lpm / 10.8m @ 6 Bar Inlet	19	LPCB
8080040300001	Brass Jet / Spray	Jet 71 Lpm / 10.8m @ 6 Bar Inlet	29	LPCB
8080040300002	Plastic Jet / Spray	Jet 59 Lpm / 10m @ 6 Bar Inlet	24	LPCB

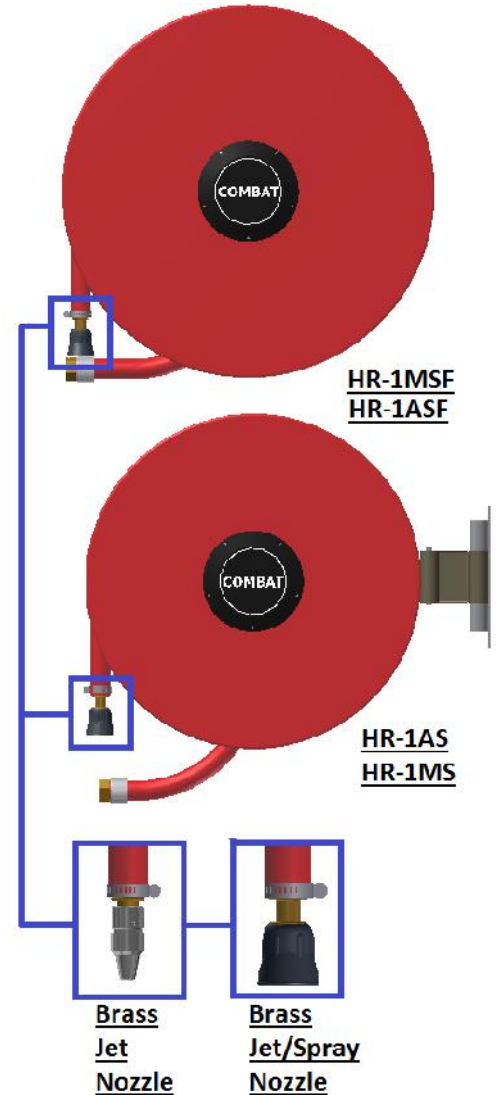

EN 671 - 1: 2012  
Cert No. 501b

**GOOD QUALITY GREAT SERVICES**

[www.lingjack.com](http://www.lingjack.com)