


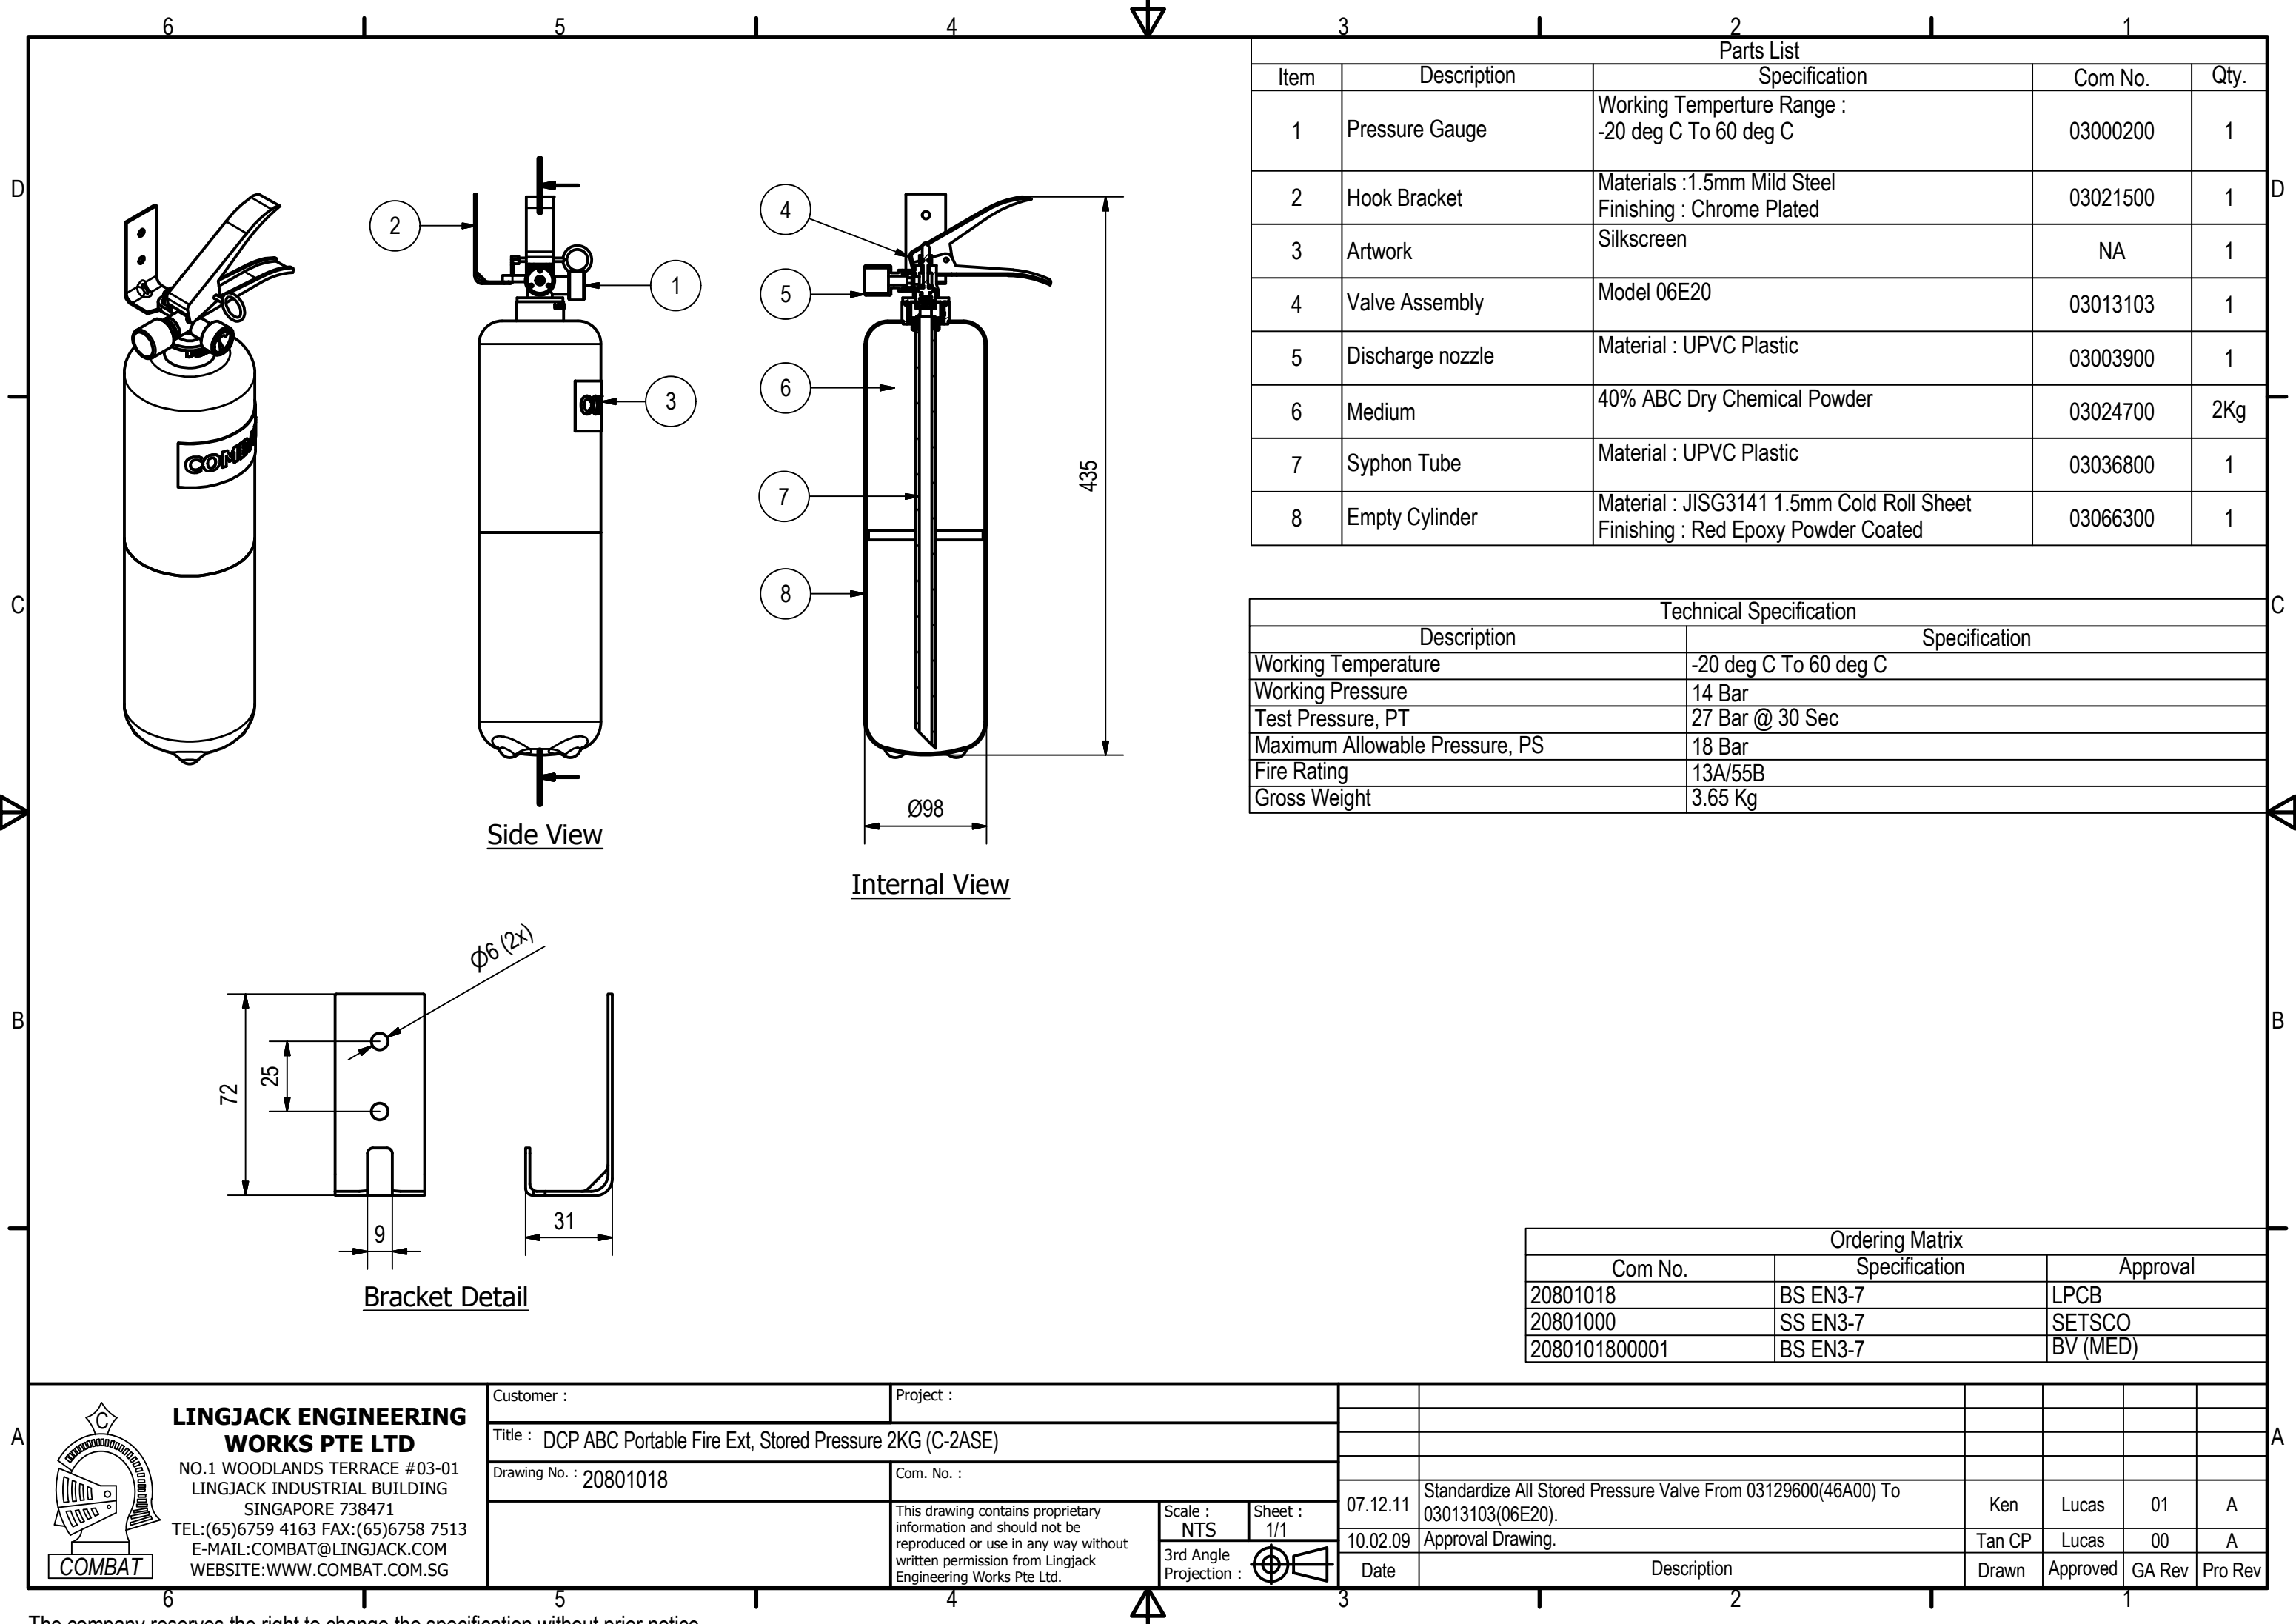

Parts List				
Item	Description	Specification	Com No.	Qty.
1	Pressure Gauge	Working Temperture Range : -20 deg C To 60 deg C	03000200	1
2	Hook Bracket	Materials :1.5mm Mild Steel Finishing : Chrome Plated	03021500	1
3	Artwork	Silkscreen	NA	1
4	Valve Assembly	Model 06E20	03013103	1
5	Discharge nozzle	Material : UPVC Plastic	03003900	1
6	Medium	40% ABC Dry Chemical Powder	03024700	2Kg
7	Syphon Tube	Material : UPVC Plastic	03036800	1
8	Empty Cylinder	Material : JISG3141 1.5mm Cold Roll Sheet Finishing : Red Epoxy Powder Coated	03066300	1

Technical Specification	
Description	Specification
Working Temperature	-20 deg C To 60 deg C
Working Pressure	14 Bar
Test Pressure, PT	27 Bar @ 30 Sec
Maximum Allowable Pressure, PS	18 Bar
Fire Rating	13A/55B
Gross Weight	3.65 Kg

Ordering Matrix		
Com No.	Specification	Approval
20801018	BS EN3-7	LPCB
20801000	SS EN3-7	SETSCO
2080101800001	BS EN3-7	BV (MED)

A



LINGJACK ENGINEERING
WORKS PTE LTD

NO.1 WOODLANDS TERRACE #03-01
LINGJACK INDUSTRIAL BUILDING
SINGAPORE 738471
TEL:(65)6759 4163 FAX:(65)6758 7513
E-MAIL:COMBAT@LINGJACK.COM
WEBSITE:WWW.COMBAT.COM.SG

Customer :

Project :

Title : DCP ABC Portable Fire Ext, Stored Pressure 2KG (C-2ASE)

Drawing No. : 20801018

Com. No. :

This drawing contains proprietary information and should not be reproduced or use in any way without written permission from Lingjack Engineering Works Pte Ltd.

Scale : NTS

Sheet : 1/1

3rd Angle Projection : 