



LINGJACK

林傑

1"x30m MANUAL FIXED SLIM HOSEREEL


MODEL : HR-1MF

Specification :

- Inlet : 1" BSP (F) Thread
- Hose Size : 1" x 30m
- Design Pressure : 12 bar
- Working Temperature : 5 Deg C to 55 Deg C
- Hydrostatic Test Pressure : 18 bar at 5 mins
- Material : Electro Galvanized Plate
- Overall Size : Dia.: 585 x 205 (±5) (Depth)
- Finishing : Red Color RAL 3000
- Gross Weight : Approximate 29.0 kg

Features :

- Outdoor UV Resistance Polyester Powder Coated Hose Reel
- High Quality Red Semi-Rigid Fire Hose Approved to EN694:2014
- Easy to Maneuver
- Slim Feature for Ease of Storage Space

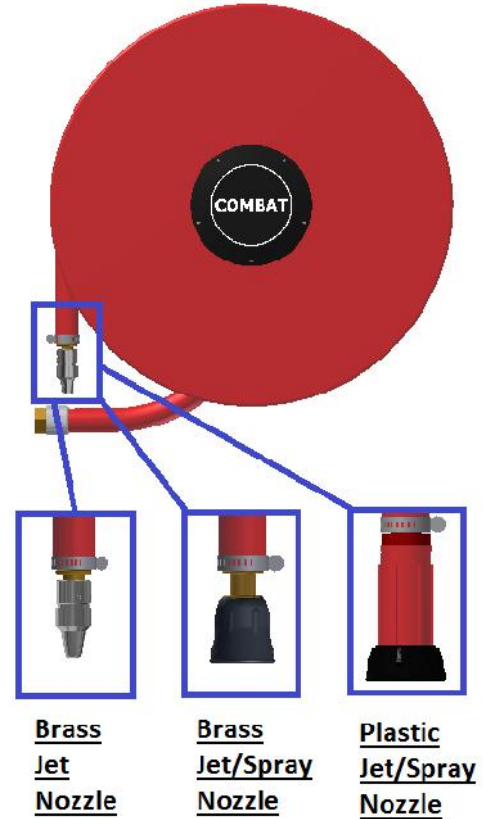

Standards : Manufactured in accordance with EN 671-1:2012

Approvals : LPCB (UK), BUREAU VERITAS (BV)


Origin : Made in Singapore

Ordering Matrix :

Com No.	Nozzle Type	Flowrate / Throw	K-Factor	Approval
80800502	Chrome Plated Brass Jet	46 Lpm / 10.8m @ 6 Bar Inlet	19	LPCB
8080050200001	Brass Jet / Spray	Jet 71 Lpm / 10.8m @ 6 Bar Inlet	29	LPCB
8080050200002	Plastic Jet / Spray	Jet 59 Lpm / 10m @ 6 Bar Inlet	24	LPCB
8080050200003	Chrome Plated Brass Jet	46 Lpm / 10.8m @ 6 Bar Inlet	19	BV (MED)
8080050200005	Brass Jet / Spray	Jet 71 Lpm / 10.8m @ 6 Bar Inlet	29	BV (MED)



EN 671 - 1: 2012
Cert No. 501b



GOOD QUALITY GREAT SERVICES

www.lingjack.com