



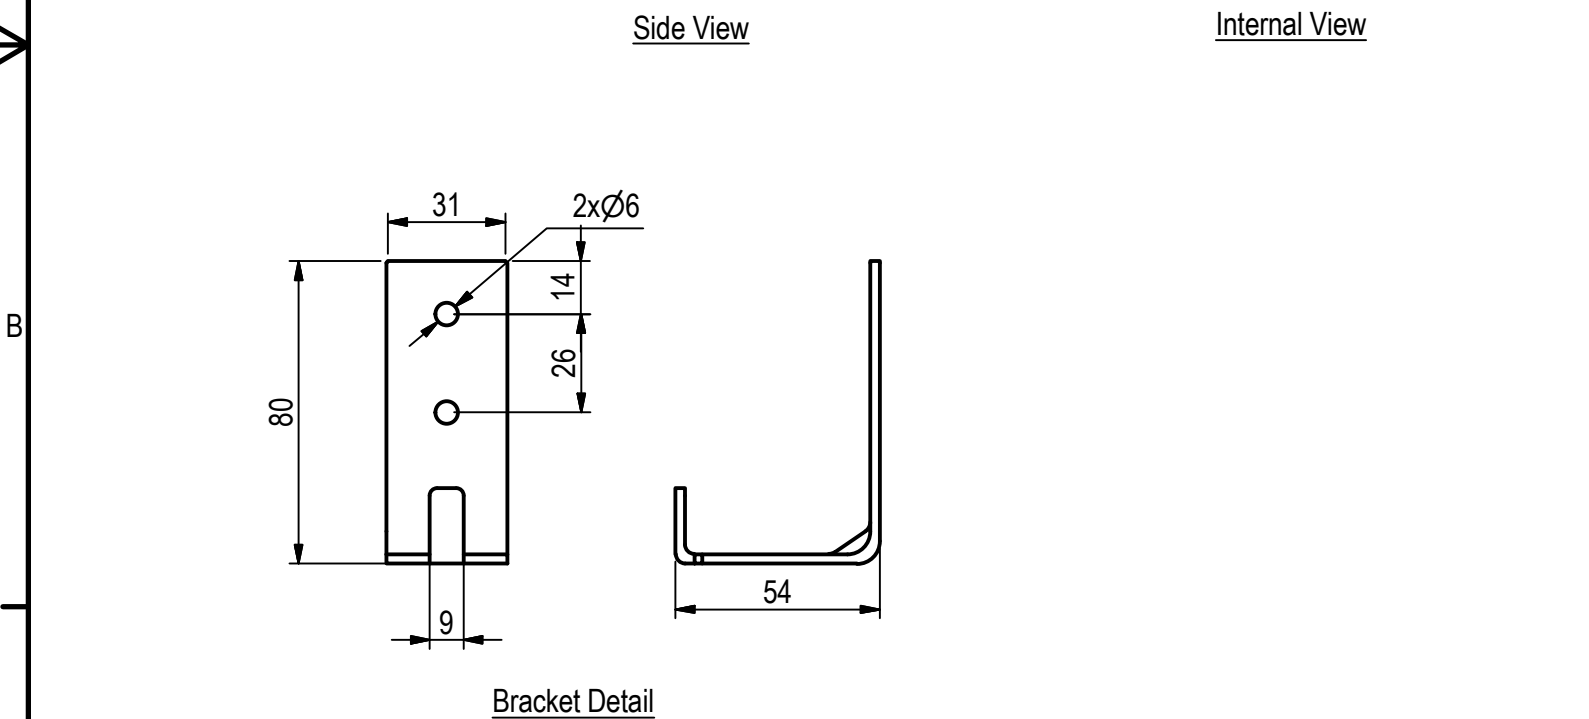

Parts List				
Item	Description	Specification	Com No.	Qty.
1	Pressure Gauge	Working Temperture Range : -20 deg C To 60 deg C	03000200	1
2	Hook Bracket	Material : 1.5mm Mild Steel Finishing : Chrome Plated	03021600	1
3	Artwork	Silkscreen	NA	1
4	Valve Assembly	Model 06E20	03013103	1
5	Medium	40% ABC Dry Chemical Powder	03024700	4Kg
6	Syphon Tube	Material : UPVC Plastic	03036800	1
7	Empty Cylinder	Material : JISG3141 Cold Roll Sheet, 1.5mm Thick Finishing : Red Epoxy Powder Coated	03097800	1
8	Hose And Horn	Material (Hose) : Black Braided PVC Material (Nozzle) : UPVC Plastic	03002501	1
9	Plastic Skirt	Material : UPVC Plastic	03065700	1

Technical Specification	
Description	Specification
Working Temperature	-20 deg C To 60 deg C
Working Pressure	14 Bar
Test Pressure, PT	27 Bar @ 30 Sec
Maximum Allowable Pressure, PS	18 Bar
Fire Rating	21A/144B
Gross Weight	6.58 Kg

Ordering Matrix			
Com No.	Brand	Approval	Remarks
20801321 00000	COMBAT	LPCB	BS EN3
20801302 00000	COMBAT	SETSCO	SS EN3

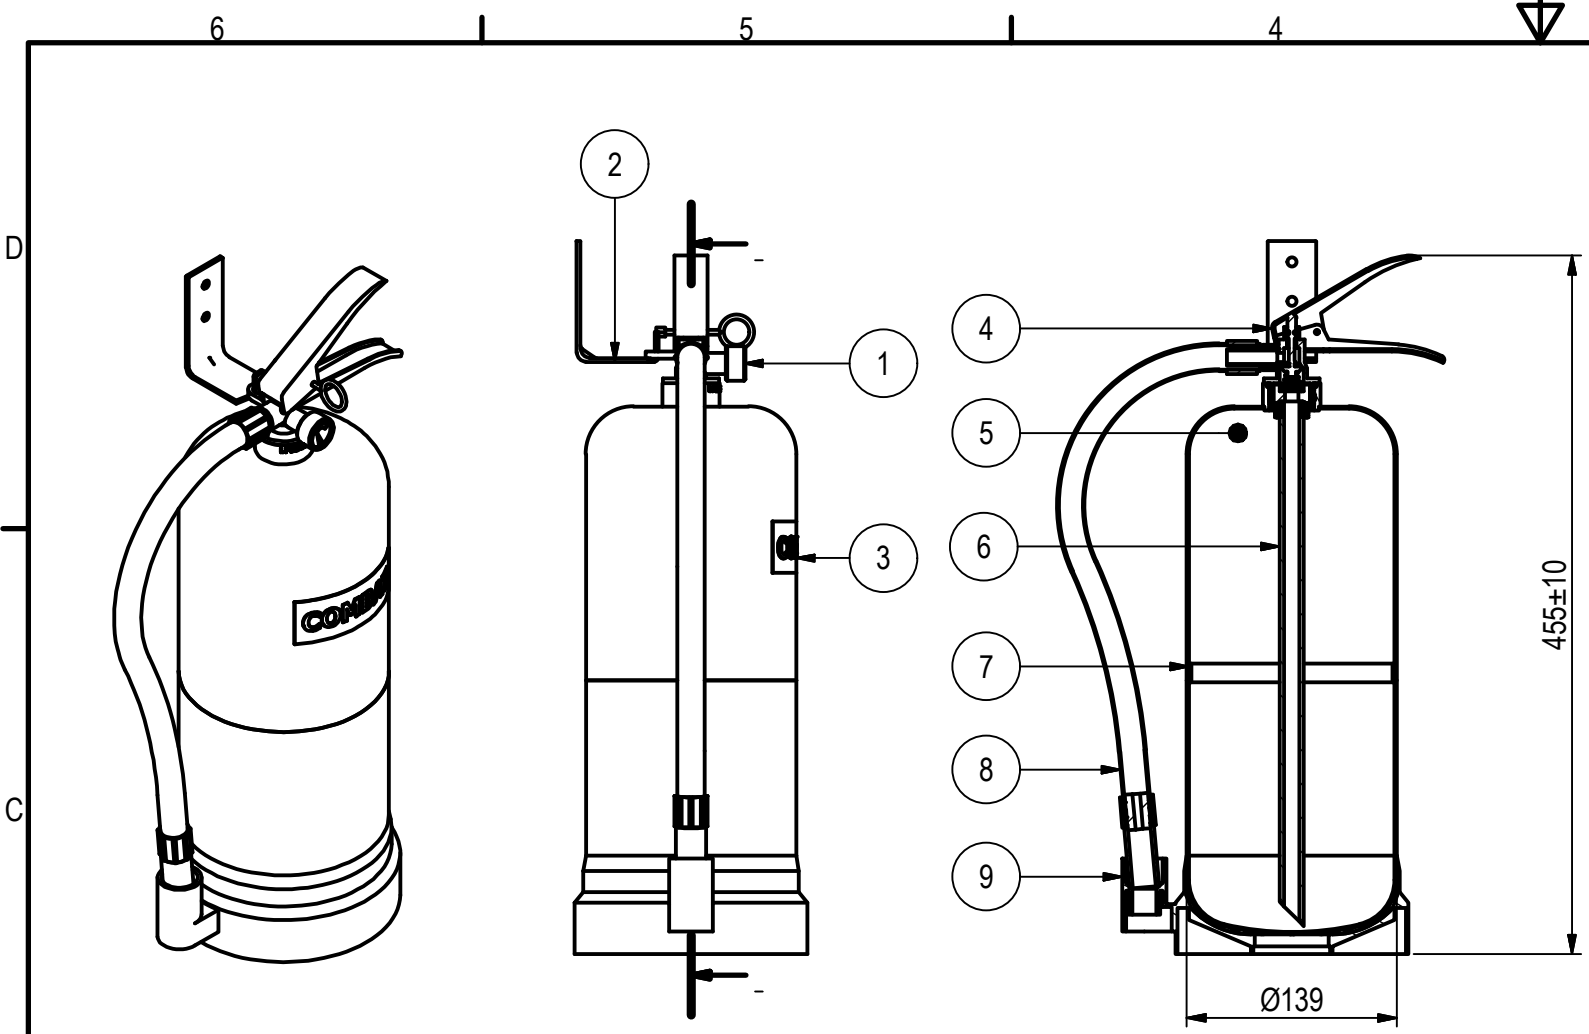

**LINGJACK ENGINEERING
WORKS PTE LTD**

NO.1 WOODLANDS TERRACE #03-01
LINGJACK INDUSTRIAL BUILDING
SINGAPORE 738471
TEL:(65)6759 4163 FAX:(65)6758 7513
E-MAIL:COMBAT@LINGJACK.COM
WEBSITE:WWW.COMBAT.COM.SG

Customer : -

Project : -

Title : DCP ABC Portable Fire Extinguisher, Stored Pressure 4KG (C-4ASE)

Drawing No. : 20801321

Com. No. :

This drawing contains proprietary information and should not be reproduced or use in any way without written permission from Lingjack Engineering Works Pte Ltd.

Scale : NTS

Sheet : 1/1

3rd Angle Projection : 

10.02.09

Approved Drawing

TanCP

Lucas

00

A

Date

Description

Drawn

Approved

GA Rev

Pro Rev