

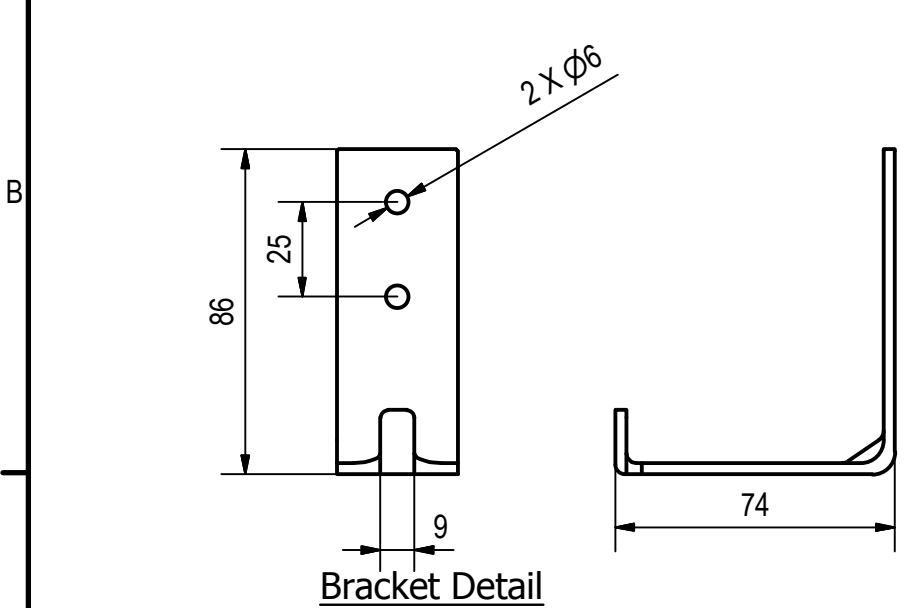


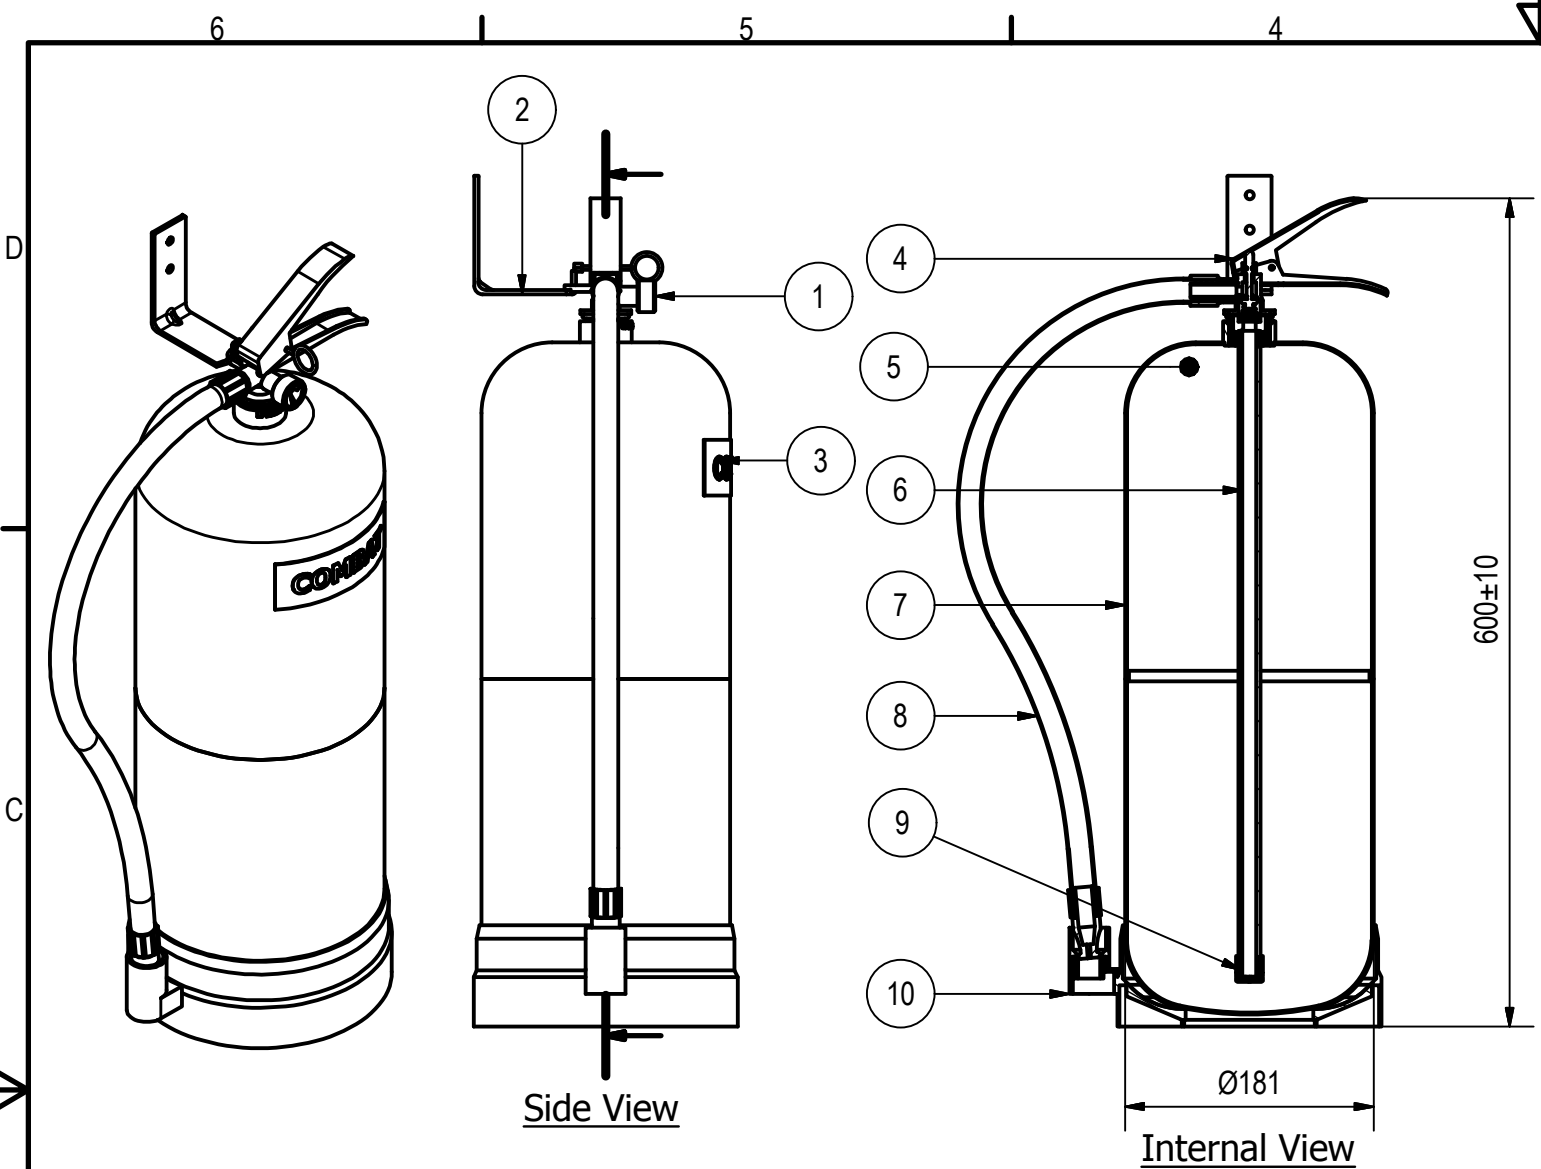

Parts List				
Item	Description	Specification	Com No.	Qty.
1	Pressure Gauge	Working Temperture Range : 5 deg C To 60 deg C	03000300	1
2	Hook Bracket	Material : 1.5mm Mild Steel Finishing : Chrome Plated	03021700	1
3	Artwork	Silkscreen	NA	1
4	Valve Assembly	Model 06E20	03013103	1
5	Medium	15% Water Additives	03011202	1
6	Syphon Tube	Materials : UPVC Plastic	03032900	1
7	Empty Cylinder	Material : JISG3141 Cold Roll Sheet, 1.5mm Thick Finishing : Red Epoxy Powder Coated	03098200	1
8	Hose And Horn	Material (Hose) : Black Braided PVC Material (Nozzle) : Red PP Plastic	03002901	1
9	Water Filter	Material : UPVC Plastic	03033100	1
10	Plastic Skirt	Materials : UPVC Plastic	03065800	1

Technical Specification	
Description	Specification
Working Temperature	5 deg C To 60 deg C
Working Pressure	14 Bar
Maximum Allowable Pressure,PS	18 Bar
Test Pressure	27 Bar @ 30sec
Fire Rating	21A
Gross Weight	13.30 Kg

Ordering Matrix			
Com No.	Brand	Approval	Remarks
20801737 00000	COMBAT	LPCB	BS EN3
20804300 00000	COMBAT	SETSCO	SS EN3



LINGJACK ENGINEERING WORKS PTE LTD
NO.1 WOODLANDS TERRACE #03-01
LINGJACK INDUSTRIAL BUILDING
SINGAPORE 738471
TEL:(65)6759 4163 FAX:(65)6758 7513
E-MAIL:COMBAT@LINGJACK.COM
WEBSITE:WWW.COMBAT.COM.SG

Customer : -

Title : Water Additives Portable Fire Ext, Stored Pressure 9L (C-9WSEA)

Drawing No. : 20801737

Com. No. :

This drawing contains proprietary information and should not be reproduced or use in any way without written permission from Lingjack Engineering Works Pte Ltd.

Scale : NTS
3rd Angle Projection : 

Sheet : 1/1

10.02.09

Approved Drawing

Tan CP

Lucas

00

A