



LINGJACK

林傑

1"x30m MANUAL SWING HOSEREEL

MODEL : HR-1SW

Specification :

- Inlet : 1" BSPT (M) Thread
- Hose Size : 1" x 30m
- Design Pressure : 12 bar
- Working Temperature : 5 Deg C to 55 Deg C
- Hydrostatic Test Pressure : 18 bar at 5 mins
- Material : Electro Galvanized Plate
- Overall Size : Dia.: 525 x 330 (±5) (Depth)
- Finishing : Red Color RAL 3000
- Gross Weight : Approximate 21.0 kg


Features :

- Outdoor UV Resistance Polyester Powder Coated Hose Reel
- High Quality Red Semi-Rigid Fire Hose Approved to EN694:2014
- Easy to Maneuver
- Easily Mountable Universal Swing Armset

Standards : Manufactured in accordance with EN 671-1:2012

Approvals : LPCB (UK), TUV (SG), BUREAU VERITAS (BV)

Origin : Made in Singapore

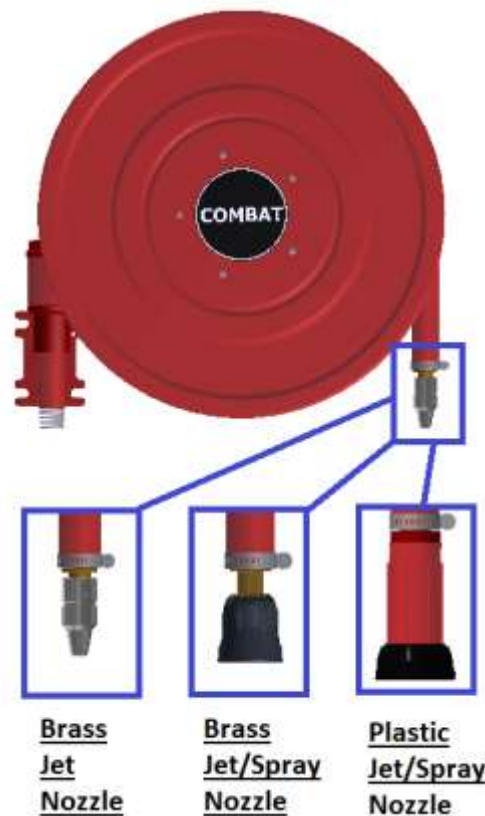


Brass
Jet
Nozzle

Brass
Jet/Spray
Nozzle

Plastic
Jet/Spray
Nozzle

Ordering Matrix :

Com No.	Nozzle Type	Flowrate / Throw	K-Factor	Approval
80800100	Chrome Plated Brass Jet	46 Lpm / 10.8m @ 6 Bar Inlet	19	LPCB
8080010000001	Brass Jet / Spray	Jet 63 Lpm / 10.8m @ 6 Bar Inlet	26	LPCB
8080010000002	Brass Jet / Spray	Jet 63 Lpm / 10.8m @ 6 Bar Inlet	26	BV (MED)
8080010000006	Plastic Jet / Spray	Jet 59 Lpm / 10m @ 6 Bar Inlet	24	LPCB
8080010000007	Chrome Plated Brass Jet	46 Lpm / 10.8m @ 6 Bar Inlet	19	TUV
8080010000008	Brass Jet / Spray	Jet 63 Lpm / 10.8m @ 6 Bar Inlet	26	TUV
8080009918001	Chrome Plated Brass Jet	46 Lpm / 10.8m @ 6 Bar Inlet	19	TUV



GOOD QUALITY GREAT SERVICES

www.lingjack.com

LEW-MDS-HR1SW Rev01 (July26)
Specification subjects to change without prior notice