


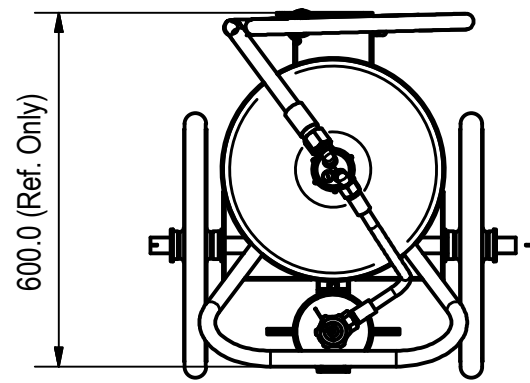


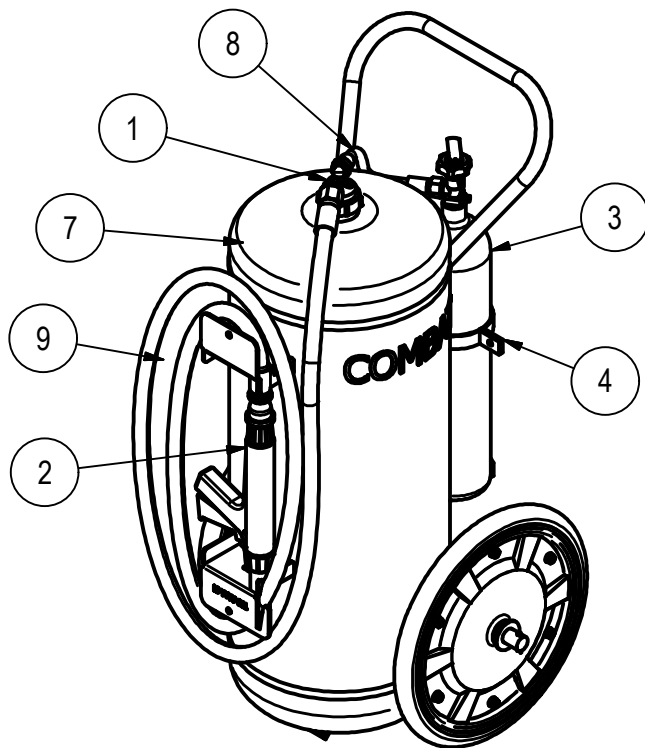

Top View

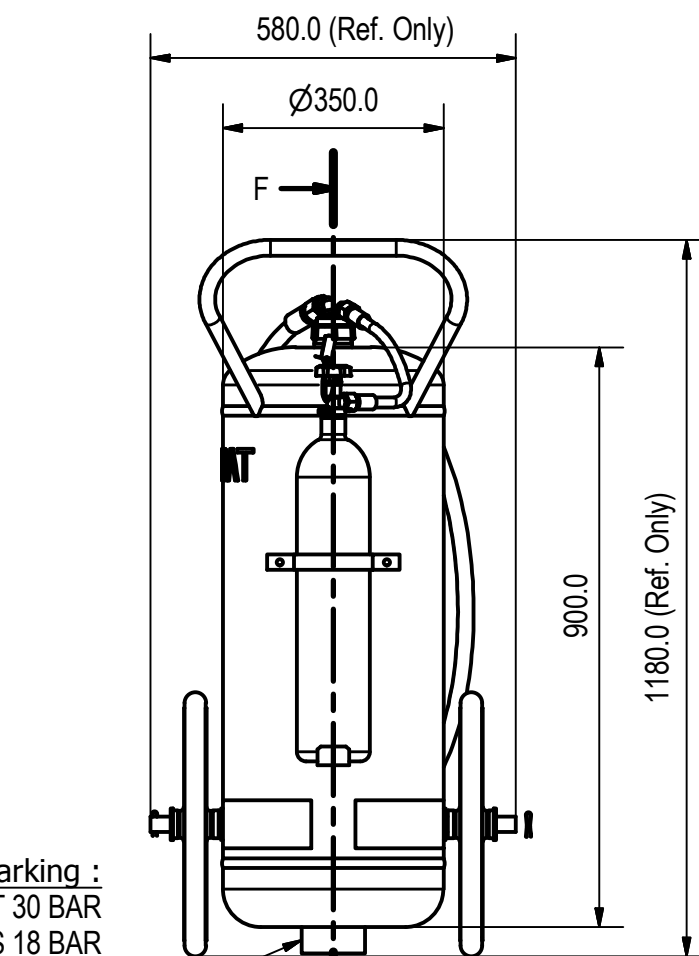

Front View

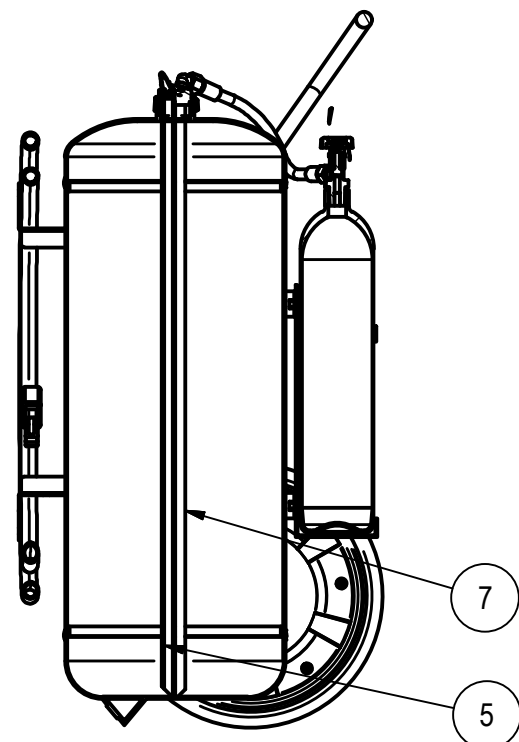

Section View F

Marking :
PT 30 BAR
PS 18 BAR
WP 14 BAR
LJ YYMM-001

PARTS LIST				
Item	Description	Material	Com No	Qty
1	Air Release Valve Assembly	Brass CZ121	03001706	1
2	Powder Controllable Discharge Gun Assembly	PVC	03079204	1
3	3KG CO2 Cartridge Complete	Cast Iron	03191701	1
4	75kg Cartridge Holder	Steel	03237774	1
5	Discharge Tube for 75kg Cylinder	Steel	03237781	1
6	Syphon Tube for 75Kg Cylinder	PVC	03237782	1
7	75kg Cylinder With 16in Wheel	JIS3131 Hot Roll Sheet 3.6mm Thick	03067302	1
8	Heavy Duty High Pressure Hose Assembly	Rubber	03003207	1
9	0.75in Hose Assembly	Rubber	03003303	1

Technical Specification	
Description	Specification
Extinguisher Medium	ABC Dry Chemical 70% Powder
Working Temperature	-20 To 60DegC
Max. Allowable Pressure, PS	18 Bar
Operating Pressure	14 Bar
Discharge Time	110 Sec
Discharge Effective Range	10 m
Fire Rating	IV B (4x21B + 233B = 317B)
Gross Weight	137 kg

Ordering Matrix			
Com No.	Brand	Approval	Remarks
21803300 00000	COMBAT	LPCB	BS EN1866-1
21803300 00001	COMBAT	TUV	BS EN1866-1



LINGJACK ENGINEERING WORKS PTE LTD
NO.1 WOODLANDS TERRACE #03-01
LINGJACK INDUSTRIAL BUILDING
SINGAPORE 738471
TEL:(65)6759 4163 FAX:(65)6758 7513
E-MAIL:COMBAT@LINGJACK.COM
WEBSITE:WWW.COMBAT.COM.SG

Customer : -

Title : 75Kg Trolley Fire Extinguisher (ABC), Cartridge (C-75ATC)

Drawing No. : 21803300

Com. No. :

Project : -

This drawing contains proprietary information and should not be reproduced or use in any way without written permission from Lingjack Engineering Works Pte Ltd.

Scale : NTS

3rd Angle Projection :

Sheet : 1/1



20.07.11	Production Drawing.	Fung	Lucas	00	A
Date	Description	Drawn	Approved	GA Rev	Pro Rev