


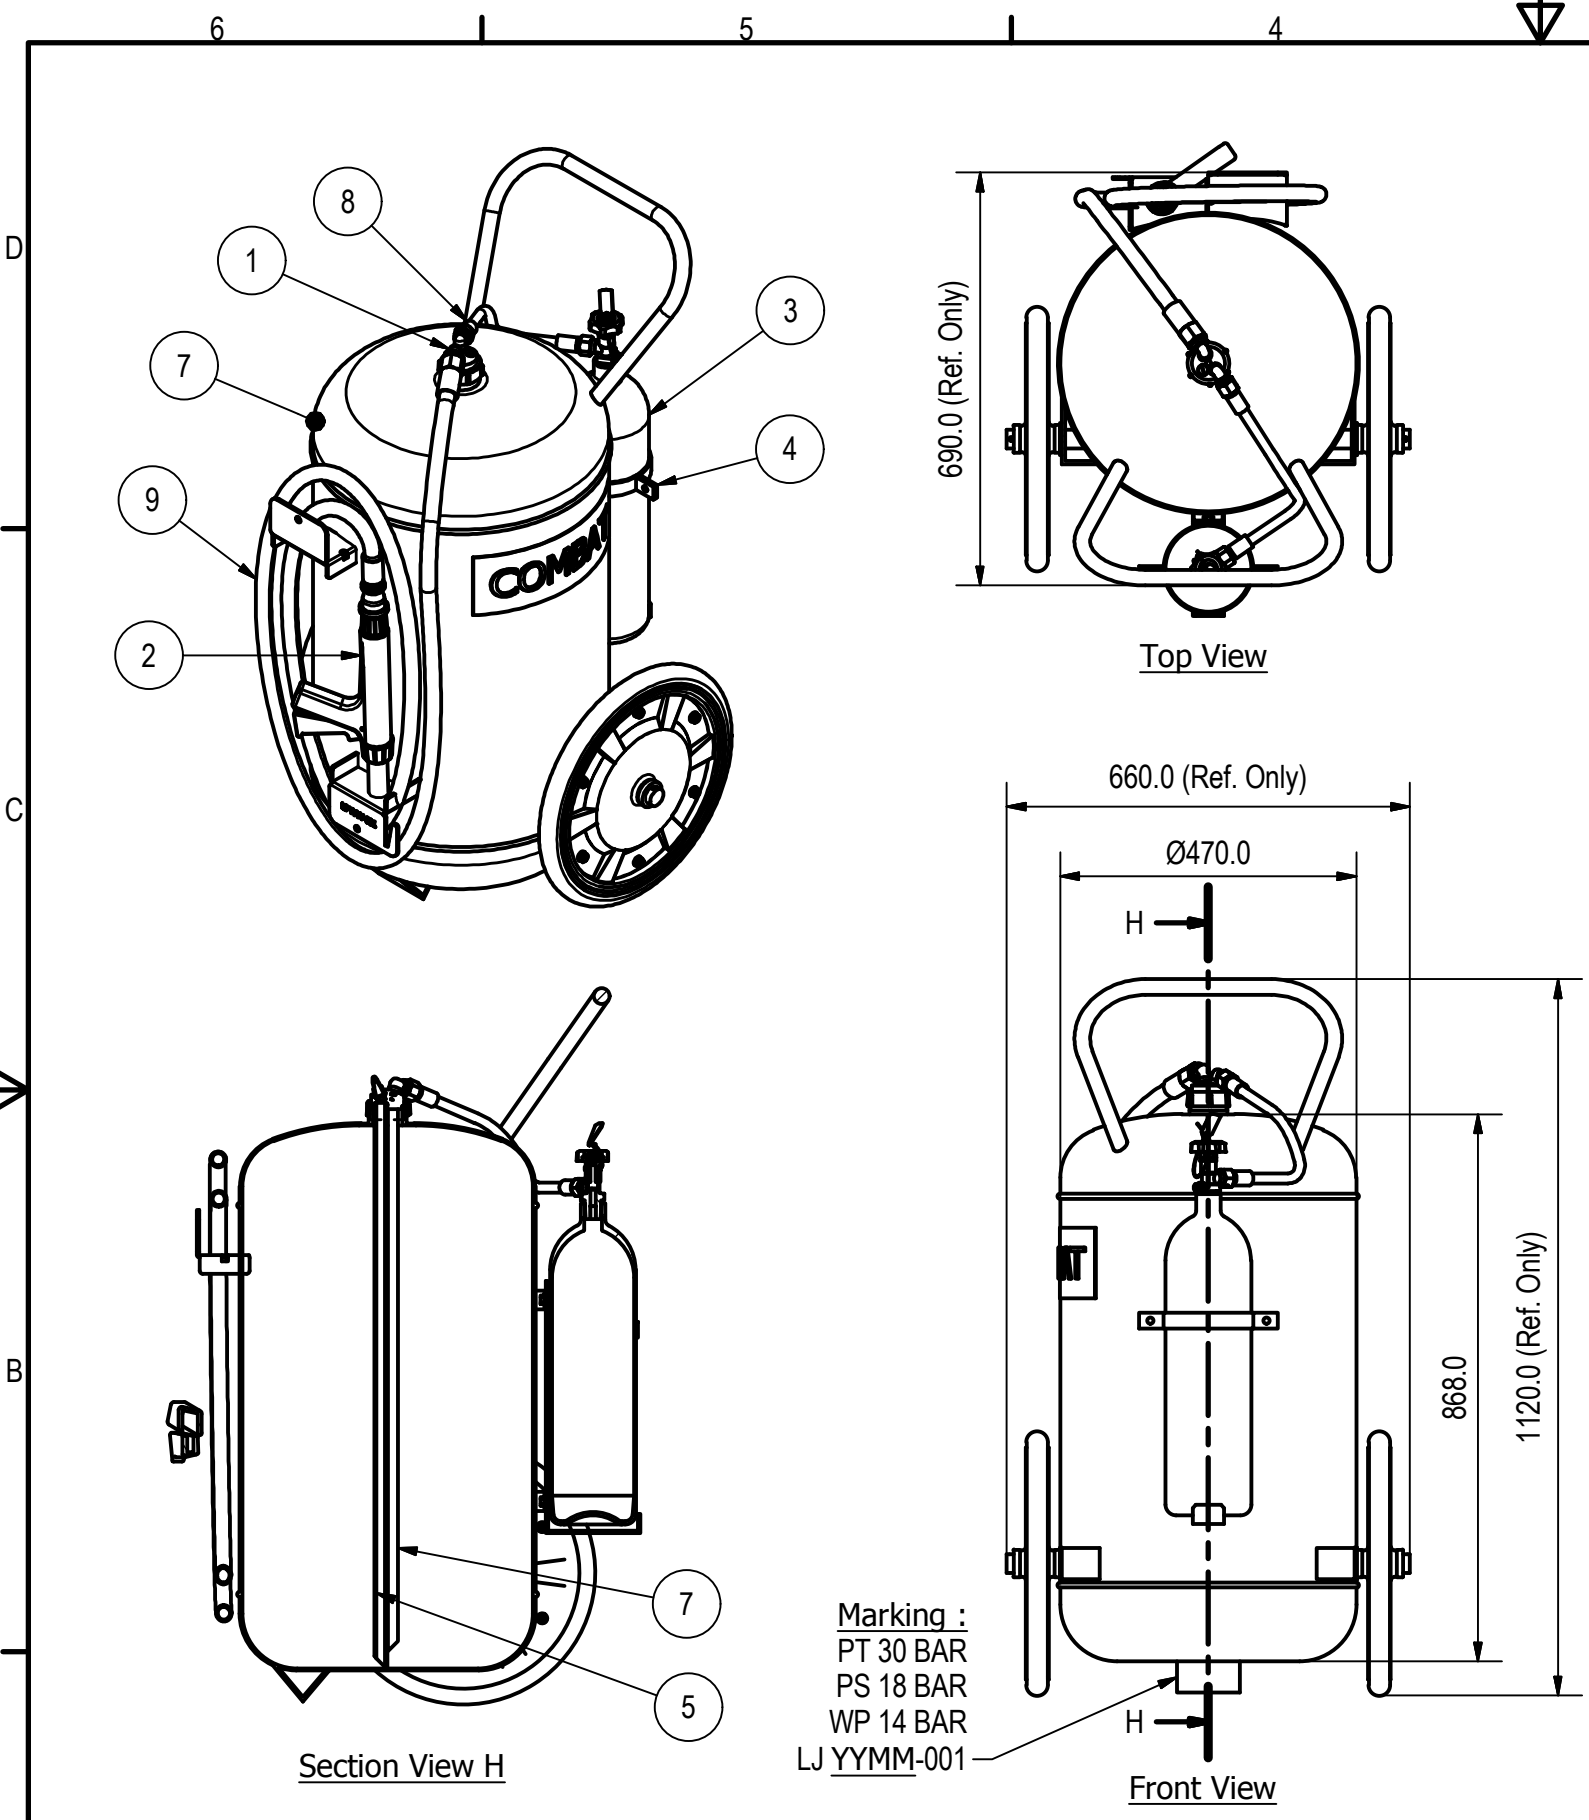

PARTS LIST				
Item	Description	Material	Com No	Qty
1	Air Release Valve Assembly	Brass CZ121	03001706	1
2	Powder Controllable Discharge Gun Assembly	PVC	03079204	1
3	3.5kg CO2 Cartridge Complete	Cast Iron	03191702	1
4	100kg & 150kg Cartridge Holder	Steel	03237775	1
5	Discharge Tube for 100kg Cylinder	Steel	03237783	1
6	Syphone Tube for 100kg Cylinder	PVC	03237784	1
7	100kg Cylinder With 16in Wheel	JIS3131 Hot Roll Sheet 3.6mm Thick	03067604	1
8	Heavy Duty High Pressure Hose Assembly	Rubber	03003207	1
9	0.75in Hose Assembly	Rubber	03003303	1

Technical Specification	
Description	Specification
Extinguisher Medium	Purple K
Working Temperature	-20 To 60DegC
Max. Allowable Pressure, PS	18 Bar
Operating Pressure	14 Bar
Discharge Time	150 Sec
Discharge Effective Range	10 m
Fire Rating	IV B (4x21B + 233B = 317B)
Gross Weight	171 kg

Ordering Matrix			
Com No.	Brand	Approval	Remarks
21804500 00000	COMBAT	LPCB	BS EN1866-1
21804500 00001	COMBAT	TUV	BS EN1866-1

LINGJACK ENGINEERING WORKS PTE LTD
NO.1 WOODLANDS TERRACE #03-01
LINGJACK INDUSTRIAL BUILDING
SINGAPORE 738471
TEL:(65)6759 4163 FAX:(65)6758 7513
E-MAIL:COMBAT@LINGJACK.COM
WEBSITE:WWW.COMBAT.COM.SG

Customer : -
Title : 100Kg Trolley Fire Extinguisher (Purple K), Cartridge (C-100PTC)
Drawing No. : 21804500

Project : -
Com. No. :
This drawing contains proprietary information and should not be reproduced or use in any way without written permission from Lingjack Engineering Works Pte Ltd.

Scale : NTS
3rd Angle Projection :

Sheet : 1/1

28.11.11
Date

Production Drawing.

Ken
Drawn

Lucas
Approved

00
GA Rev

A
Pro Rev